BUILDING STATISTICS:

BUILDING HEIGHT: 22'-0"

BUILDING AREA:

BASEMENT:	995	SQFT
GARAGE:	330	SQFT
GROUND FLOOR:	1,013	SQFT
SECOND FLOOR:	970	SQFT
TOTAL GROSS AREA:	2,380	SQFT
TOTAL FOOTPRINT:	1,410	SQFT

LOT AREA: 5,251 SQFT
LOT COVERAGE: 27%

SB-12 ENERGY CALCULATION SUMMARY:
OBC COMPLIANCE PACKAGE A1
SB-12, TABLE 3.1.1.2.A (IP)

DRAWING INDEX:

A0.0	COVER SHEET
A0.1	CONSTRUCTION ASSEMBLIES DOOR & WINDOW SCHEDULES
A1.0	SITE PLAN
A2.0	BASEMENT PLAN
A2.1	GROUND FLOOR PLAN
A2.2	SECOND FLOOR PLAN
A3.0	ELEVATIONS
A4.0	BUILDING SECTION
A5.1	SECTION DETAILS
A5.2	WINDOW DETAILS
A6.0	STAIR SECTION STAIR PLANS

OBC DATA SHEET

ITEM	ONTARIO BUILDING CODE DATA MATRIX PARTS 3 & 9			OBC REFERENCE
1	Project Description:	☒ New ☐ Addition ☐ Alteration ☐ Change of Use	☐ Part 11	☐ Part 3 ☒ Part 9
2	Major Occupancy(s):			3.1.2.1.(1)
3	Building Area (sq. m.):	Existing: 0 New: 130 Total: 130		1.1.3.2
4	Gross Area:	Existing: 0 New: 221 Total: 221		1.1.3.2
5	Number of Storeys:	Above Grade: 2 Below Grade: 1		3.2.1.1. & 1.1.3.2.
6	Building Height (m):	6.70		
7	Number of Streets / Access Routes:	1		3.2.2.10 & 3.2.5.5.
8	Sprinkler System Proposed:	☐ Entire Building ☐ Basement only ☐ In lieu of roof rating ☒ Not required		3.2.2.17
9	Building Classification:	GROUP C		3.2.2.61 & 3.2.2.48
10	Standpipe Required:	☐ Yes ☒ No		3.2.9
11	Fire Alarm required:	☐ Yes ☒ No		3.2.4
12	Water Services / Supply is Adequate:	☒ Yes ☐ No		
13	High Building:	☐ Yes ☒ No		3.2.6.1
14	Permitted Construction: Actual Construction:	☒ Combustible ☐ Non-combustible or both ☒ Combustible ☐ Non-combustible or both		3.2.2.47 & 3.2.2.61
15	Mezzanines(s) Area in sq. m.:	-		
16	Occupant Load based on:	☒ sq. m. per person ☐ Design of building Basement: Occupancy - Load - persons 1st Floor: Occupancy - Load - persons 2nd Floor: Occupancy 2 Load 4 persons 3rd Floor: Occupancy - Load - persons		3.1.17.1
17	Barrier Free Design:	☐ Yes ☒ No (Explain)		3.8
18	Hazardous Substances:	☐ Yes ☒ No		3.3.1.2
19	Required Fire Resistance Rating (FRR)	Horizontal Assemblies FRR (Hours) / Listed Design No. or Description (SG-2) Floors: ____ Hours Roof: ____ Hours Mezzanine: ____ Hours FRR of Supporting Members / Listed Design No. or Description (SG-2) Floors: ____ Hours Roof: ____ Hours Mezzanine: ____ Hours		3.2.3.7 3.2.2.61 3.2.2.48 3.1.3.1(2)



MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

ALGONQUIN COLLEGE

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
1	FINAL SUBMISSION	08/08/23

PROJECT TITLE
MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE
COVER SHEET
DRAWING INDEX

DRAWN BY
STEVEN ESTAFANOS

REVIEWED BY
PROFESSOR KURT DRAPER

COURSE & SECTION
ARC 8402 - 020

SCALE
N/A

SHEET NO.
A0.0

WALL ASSEMBLIES

W1: MASONRY WALL CONSTRUCTION (R29.5) (WALLS ABOVE GRADE R22)
3 1/2" MASONRY VENEER c/w WEEPHOLES @ 2'-0" o.c.
1 1/2" AIR SPACE
1 1/2" CLADMATE INSULATION BOARD (R7.5)
AIR BARRIER WALL MEMBRANE
1/2" OSB SHEATHING
2"x6" WOOD STUDS @ 16" o.c. c/w MINERAL FIBRE BATT INSULATION (R22)
6mil POLYETHYLENE VAPOUR BARRIER
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

W2: HORIZONTAL CEMENT BOARD SIDING WALL CONSTRUCTION (R29.5)
(WALLS ABOVE GRADE R22)
5/16" HORIZONTAL HARDIEPLANK LAP SIDING
1"x3" VERTICAL WOOD STRAPPING @ 16" o.c.
1 1/2" CLADMATE INSULATION BOARD (R7.5)
AIR BARRIER WALL MEMBRANE
1/2" OSB SHEATHING
2"x6" WOOD STUDS @ 16" o.c. c/w MINERAL FIBRE BATT INSULATION (R22)
6mil POLYETHYLENE VAPOUR BARRIER
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

W3: FOUNDATION WALL CONSTRUCTION (R22) (BASEMENT WALLS R20)
AIR GAP WATERPROOFING DIMPLE BOARD MEMBRANE
DAMPPROOFING
(PARGING ABOVE GRADE)
8" 20Mpa REINFORCED POURED CONCRETE FOUNDATION WALL
INTERIOR DAMPPROOFING TO GRADE
1/2" AIRSPACE
2"x6" WOOD STUDS @ 2'-0" o.c. c/w MINERAL FIBRE BATT INSULATION (R22)
6mil POLYETHYLENE VAPOUR BARRIER
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

W3a: FOUNDATION WALL CONSTRUCTION (R22) (BASEMENT WALLS R20)
SAME AS W3 WITH 10" 20MPA REINFORCED POURED CONCRETE
FOUNDATION WALL

W3b: FOUNDATION WALL CONSTRUCTION
AIR GAP WATERPROOFING DIMPLE BOARD MEMBRANE
DAMPPROOFING
(PARGING ABOVE GRADE)
10" 20MPA REINFORCED POURED CONCRETE FOUNDATION WALL

W3c: FOUNDATION WALL CONSTRUCTION (R22) (BASEMENT WALLS R20)
8" 20Mpa REINFORCED POURED CONCRETE FOUNDATION WALL
INTERIOR DAMPPROOFING TO GRADE
1/2" AIRSPACE
2"x6" WOOD STUDS @ 2'-0" o.c. c/w MINERAL FIBRE BATT INSULATION (R22)
6mil POLYETHYLENE VAPOUR BARRIER
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

W4: GARAGE INTERIOR WALL (R22) (WALLS ABOVE GRADE R22)
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)
AIR BARRIER WALL MEMBRANE
2"X6" WOOD STUDS @ 1'-0" o.c. c/w MINERAL FIBRE BATT INSULATION (R22)
6mil POLYETHYLENE VAPOUR BARRIER, CAULKED & GAS PROOF SEALED
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

W5: INTERIOR WALL (TYPICAL)
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)
2"x4" WOOD STUDS @ 16" o.c.
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

W6: HORIZONTAL CEMENT BOARD SIDING WALL CONSTRUCTION (R29.5)
(WALLS ABOVE GRADE R22) USED ONLY AT UNDERSIDE OF UPPER STAIRCASE
5/16" HORIZONTAL HARDIEPLANK LAP SIDING
1"x3" VERTICAL WOOD STRAPPING @ 16" o.c.
1 1/2" CLADMATE INSULATION BOARD (R7.5)
AIR BARRIER WALL MEMBRANE
1/2" OSB SHEATHING
2"x6" WOOD STUDS @ 16" o.c. c/w MINERAL FIBRE BATT INSULATION (R22)
6mil POLYETHYLENE VAPOUR BARRIER
2"x6" WOOD STUDS @ 16" o.c.
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

FLOOR ASSEMBLIES

F1: BASEMENT SLAB (R10) (BELOW GRADE SLAB R N/A)
3" 25MPa POURED CONCRETE SLAB
10 mil POLYETHYLENE VAPOUR BARRIER
2" XPS RIGID INSULATION (R10)
4" COMPACTED COARSE GRANULAR FILL (TO UNDISTURBED SOIL)
UNDISTURBED SOIL

F2: GARAGE SLAB (R10) (SLAB LESS THAN 2'-0" BELOW GRADE R10)
4" 30MPa POURED CONCRETE SLAB
10 mil POLYETHYLENE VAPOUR BARRIER
2" XPS RIGID INSULATION (R10)
4" COMPACTED COARSE GRANULAR FILL
UNDISTURBED SOIL

F3: FLOOR ASSEMBLY
FINISHED FLOOR, REFER TO ROOM FINISH SCHEDULE
5/8" PLYWOOD SHEATHING
2"x10" WOOD JOISTS @ 1'-0" o.c. w/ BRIDGING
1"x3" WOOD STRAPPING @ 16" o.c.
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

F4: SECOND FLOOR ABOVE GARAGE (R42) (EXPOSED FLOOR R31)
FINISHED FLOOR, REFER TO ROOM FINISH SCHEDULE
5/8" PLYWOOD SHEATHING
6mil POLYETHYLENE VAPOUR BARRIER
2"x10" WOOD JOISTS @ 1'-0" o.c. w/ BRIDGING
AIR SPACE
8" MINERAL FIBER BATT INSULATION (R32)
AIR BARRIER, CAULKED & GAS PROOF SEALED
2" XPS RIGID INSULATION (R10)
1"x3" WOOD STRAPPING @ 16" o.c.
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

ROOF ASSEMBLIES

R1: ROOF CONSTRUCTION (R60) (CEILING WITH ATTIC SPACE R60)
25 YEAR ASPHALT SHINGLES
ICE & WATER SHIELD EXTENDS A MINIMUM 1'-0" BEYOND INSIDE FACE OF WALL
5/8" OSB SHEATHING c/w H-CLIPS
PRE-ENGINEERED ROOF TRUSSES @ 2'-0" o.c.
24" LOOSE FILL FIBERGLASS INSULATION (R60)
6mil POLYETHYLENE AIR/VAPOUR BARRIER
1/2" GYPSUM BOARD (ALL SEAMS TAPED, MUDDED)

R2: FLAT ROOF (R31) (CEILING WITHOUT ATTIC SPACE R31)
IKO 2 PLY ROOF-FAST 95 BASE WITH ROOF-FAST CAP SHEET
3/4" EXTERIOR GRADE PLYWOOD SHEATHING ON FURRING STRIPS TO SLOPE 2% TO ROOF EDGE
3/4" PLYWOOD SHEATHING
2"x8" WOOD JOISTS @ 1'-0" o.c.
AIR SPACE
6" OPEN CELL SPRAY FOAM TO U/S OF SHEATHING (R21)
6mil POLYETHYLENE AIR/VAPOUR BARRIER
2" XPS RIGID INSULATION (R10)
1"x3" WOOD STRAPPING @ 16" o.c.
1/2" GYPSUM BOARD (ALL SEAMS TAPED & MUDDED)

R3: FLAT ROOF
IKO 2 PLY ROOF-FAST 95 BASE WITH ROOF-FAST CAP SHEET
3/4" EXTERIOR GRADE PLYWOOD SHEATHING ON FURRING STRIPS TO SLOPE 2% TO ROOF EDGE
2"x8" WOOD JOISTS @ 1'-0" o.c.
1"x3" WOOD STRAPPING @ 16" o.c.
1/4" NON-VENTED SMOOTH HARDIESOFFIT PANELS

DOOR SCHEDULE (D23)

KEY	SIZE (WxH)	RO (WxH)	QTY	REMARKS
BASEMENT				
D07	30" x 84"	31" x 85"	1	
GROUND FLOOR				
D01	39" x 96" c/w SIDELIGHT 20" x 96"	59" x 97"	1	ANDERSEN E SERIES HPI 3280 c/w ANDERSEN E SERIES HPI 1880
D02	72" x 96"	73" x 97"	1	ANDERSEN E SERIES HPI 6080
D03	39" x 96"	40" x 97"	1	ANDERSEN E SERIES HPI 3280
D04	108" x 96"	109" x 97"	1	INSULATED GARAGE DOOR
D05	36" x 84"	37" x 85"	1	INSULATED MUDROOM DOOR
D06	32" x 84"	33" x 85"	2	
D07	30" x 84"	31" x 85"	1	
D08	24" x 84"	25" x 85"	1	
SECOND FLOOR				
D07	30" x 84"	31" x 85"	5	
D09	28" x 84"	29" x 85"	1	

WINDOW SCHEDULE (W23)

KEY	SIZE (WxH)	RO (WxH)	QTY	REMARKS
BASEMENT				
W01	36" x 24"	37" x 25"	3	ANDERSEN E SERIES SLD 3020
GROUND FLOOR				
W02	36" x 60"	37" x 61"	1	ANDERSEN E SERIES CMP 3060
W03	36" x 54"	37" x 55"	1	ANDERSEN E SERIES CMT 3046
W04	72" x 72"	73" x 73"	1	ANDERSEN E SERIES CMT 2060 c/w ANDERSEN E SERIES CMP 4060
W05	20" x 72"	21" x 73"	2	ANDERSEN E SERIES CMT 1860
W06	96" x 72"	97" x 73"	1	(2) ANDERSEN E SERIES CMT 2060 c/w ANDERSEN E SERIES CMP 4060
W07	128" x 72"	129" x 73"	1	(2) ANDERSEN E SERIES CMT 2460 c/w ANDERSEN E SERIES CMP 6060
SECOND FLOOR				
W08	36" x 60"	37" x 61"	1	ANDERSEN E SERIES CMT 3050
W09	48" x 60"	49" x 61"	1	ANDERSEN E SERIES FCMT 4050
W10	96" x 66"	97" x 67"	1	(2) ANDERSEN E SERIES CMT 2056 c/w ANDERSEN E SERIES CMP 4056
W11	20" x 66"	21" x 67"	5	ANDERSEN E SERIES CMT 1856
W12	72" x 66"	73" x 67"	1	ANDERSEN E SERIES CMT 2056 c/w ANDERSEN E SERIES CMP 4056

ALGONQUIN COLLEGE

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
1	FINAL SUBMISSION	08/08/23

PROJECT TITLE
MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE
CONSTRUCTION ASSEMBLIES
DOOR & WINDOW SCHEDULES


DRAWN BY
STEVEN ESTAFANOS

REVIEWED BY
PROFESSOR KURT DRAPER

COURSE & SECTION
ARC 8402 - 020

SCALE
N/A


SHEET NO.
A0.1

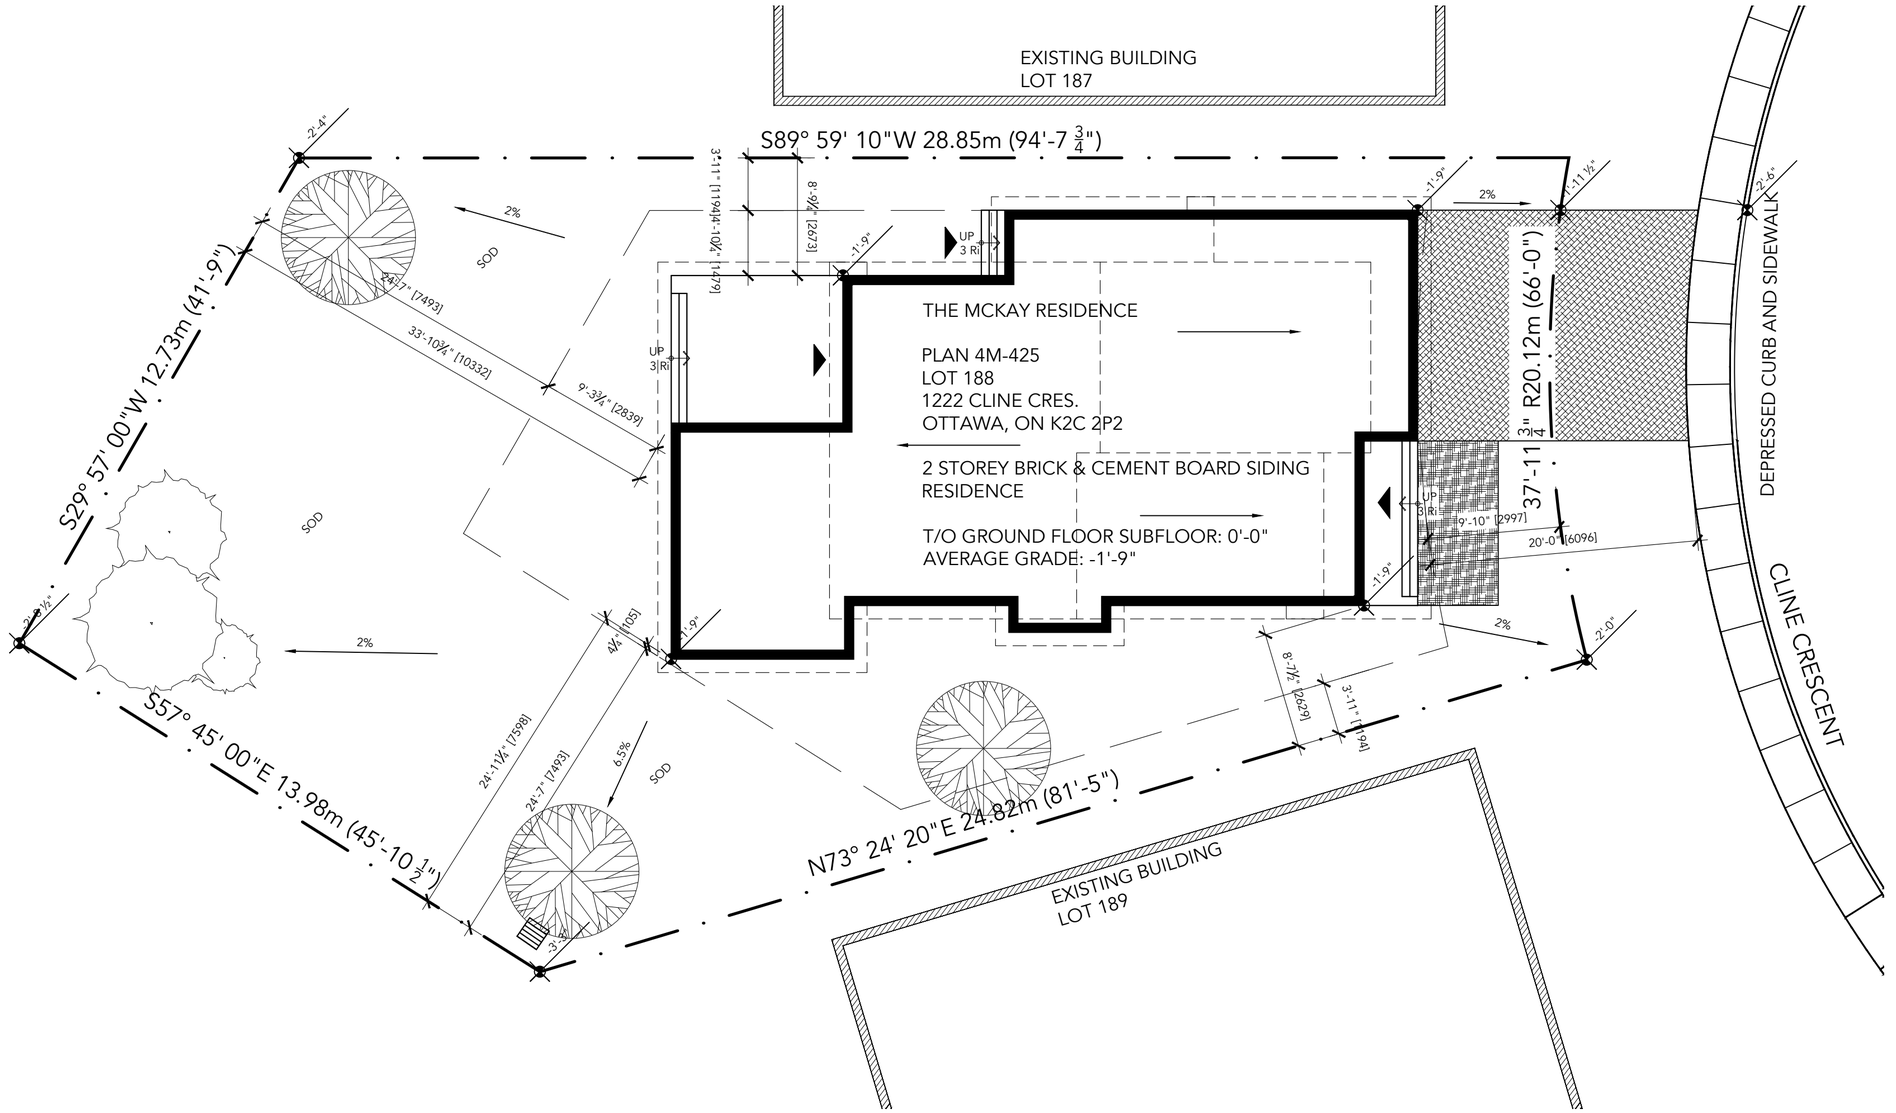


1 A1.0 SITE PLAN
SCALE: ⅛" = 1'-0"

LANDSCAPE

ROUGH GRADES, DRIVEWAY, ENTRY WALK AND PLANTINGS FOR OCCUPANCY




SILVER MAPLE
ACER SACCHARINUM
[10' Ø]




WHITE BIRCH
BETULA PAPYRIFERA
[11', 9', 5' Ø]

SOD

SOD PROVIDED WITHIN 8 MONTHS



ASPHALT PAVING



PERMEABLE BRICK PAVING

GRADING



ELEVATION MARKER

% GRADIENT
FLOW DIRECTION

MIN 2% GRADE

MAX 7% GRADE

CATCH BASIN

ZONING

R1QQ RESIDENTIAL FIRST DENSITY ZONE
Plan 4M-425
Lot 188

MINIMUM SETBACKS:

FRONT YARD: 9'-10"
BACKYARD: 24'-7"
SIDE YARD 3'-11"

MAXIMUM BUILDING HEIGHT:
36'-1"

SETBACKS ARE DENOTED AS:

TOTAL GROSS AREA: 2,380 SQFT.
TOTAL FOOTPRINT: 1,410 SQFT.

LOT AREA: 5,251 SQFT.
LOT COVERAGE: 27%

BUILDING HEIGHT: 22'-0"

EAVES ARE A PERMITTED PROJECTION, DENOTED AS:

ALGONQUIN COLLEGE

NORTH

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
2	FINAL SUBMISSION	08/08/23
1	ASSIGNMENT SUBMISSION	01/08/23

PROJECT TITLE
MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE
SITE PLAN


DRAWN BY
STEVEN ESTAFANOS

REVIEWED BY
PROFESSOR KURT DRAPER

COURSE & SECTION
ARC 8402 - 020

SCALE
⅛" = 1'-0"

SHEET NO.
A1.0

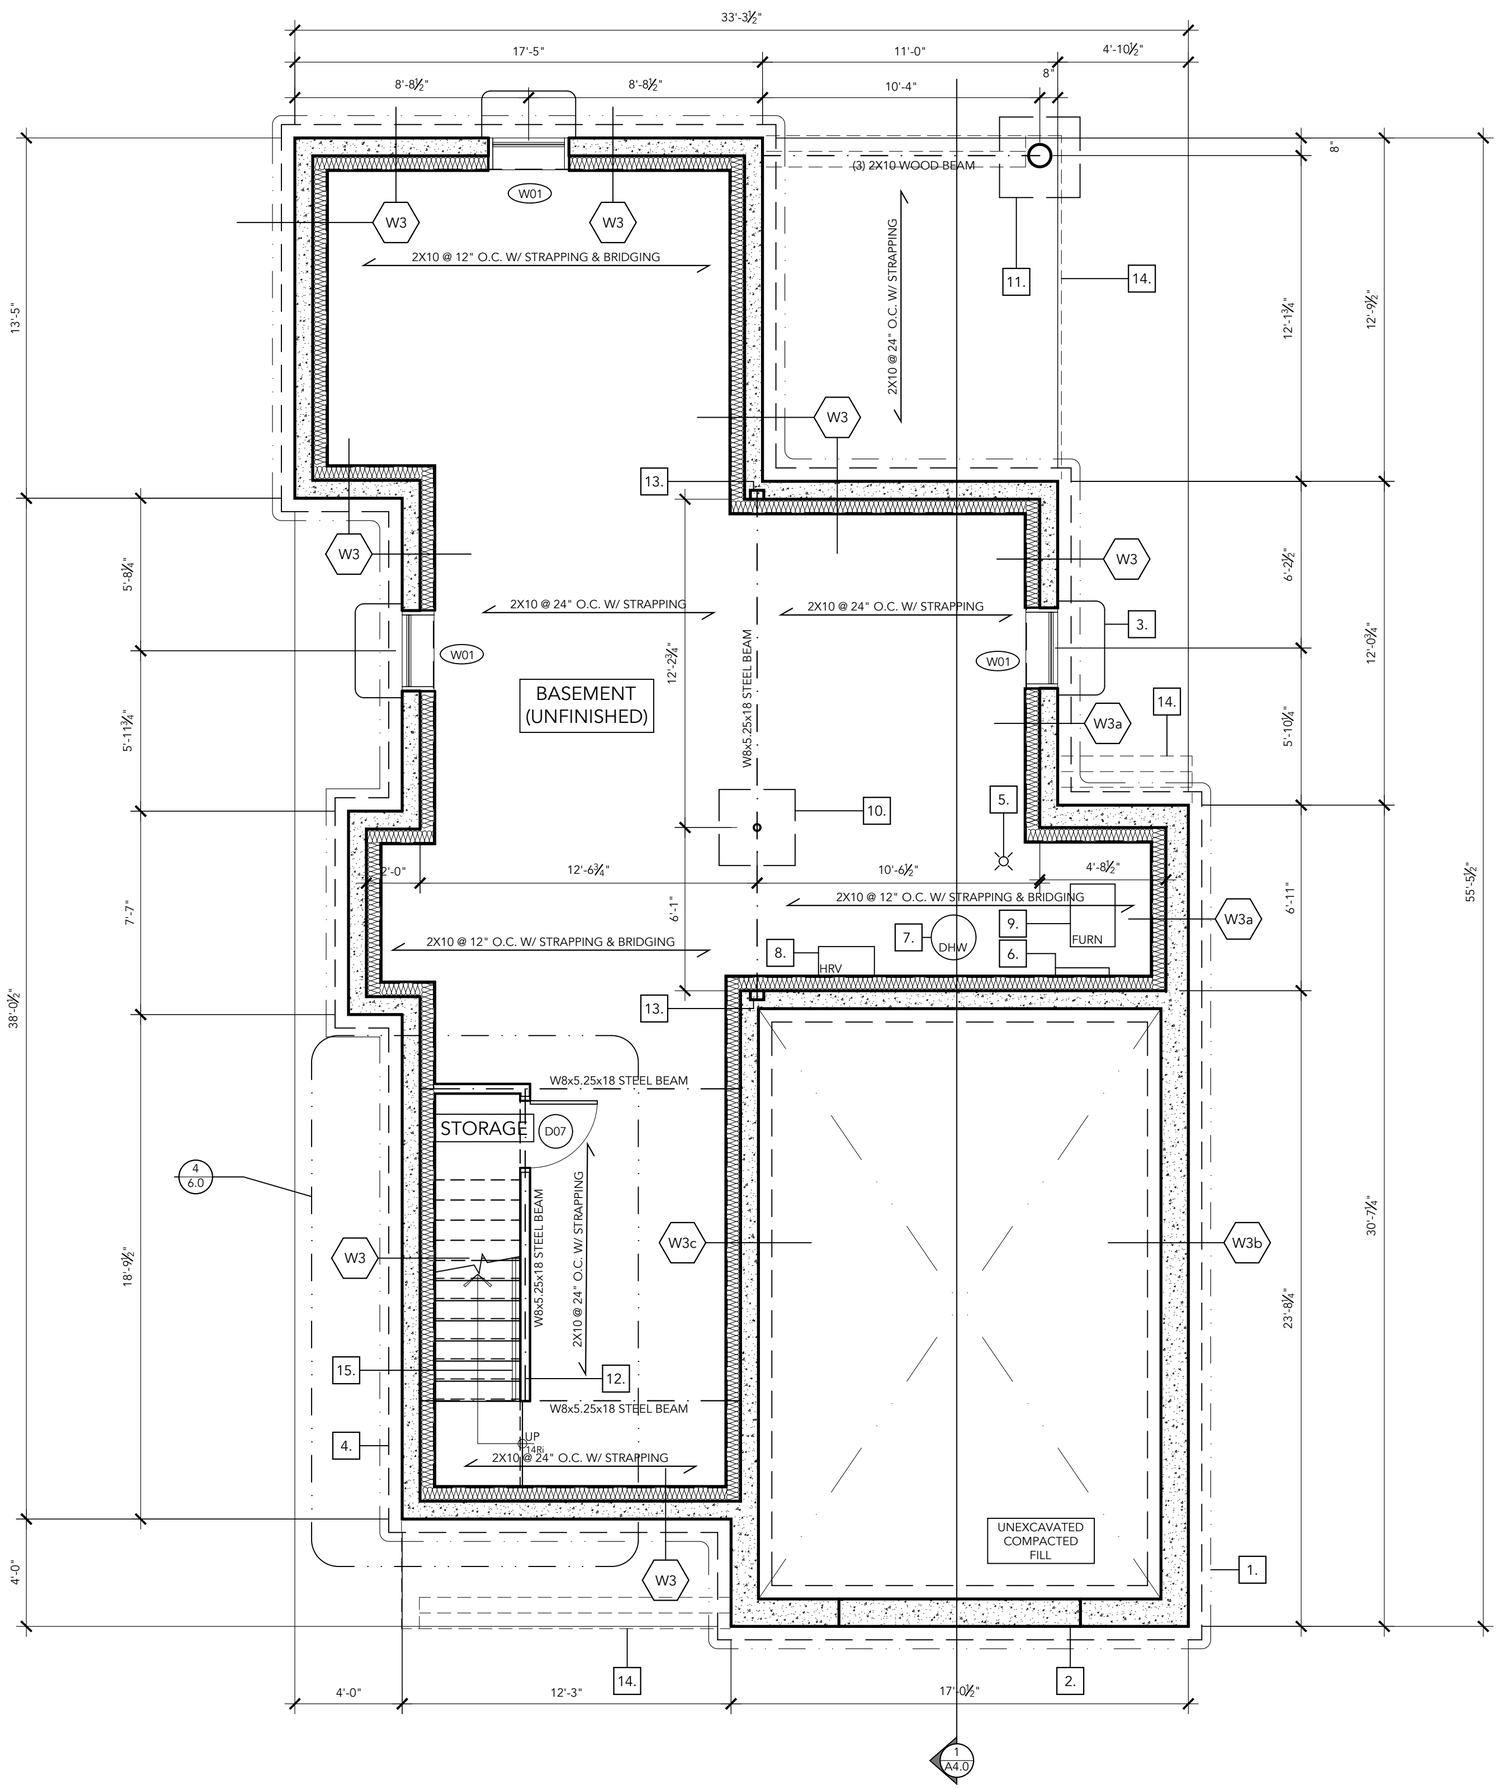

DRAWING NOTES:

1. 4" DIA. WEEPING TILE
2. CHECK IN FOUNDATION TO ACCOMMODATE THE GARAGE DOOR
3. WINDOW WELL AS PER OBC REFERENCE 9.9.10.1 (3'-6" X 21"): CORRUGATED STEEL WINDOW WELL C/W DRAIN TO WEEPING TILE
4. LINE OF FOOTINGS BELOW
5. FLOOR DRAIN PER OBC REFERENCE 9.31.4.4. CONCRETE SLAB SLOPING TO DRAIN
6. 3 ⅜" X 24" ELECTRICAL PANEL
7. 20" DIA. DOMESTIC HOT WATER TANK (DHW)
8. 13" X 25" 75% SENSIBLE HEAT-RECOVERY EFFICIENCY UNIT (HRV)
9. 20" X 28" FURNACE, 96% MIN. AFUE (ANNUAL FUEL UTILIZATION EFFICIENCY)
10. PAD FOOTING AT POST (34"X34"x15")
11. PAD FOOTING (36"X36"X15" & SONO TUBE (10" DIA.)
12. STRUCTURAL FRAMING AT STAIR OPENING
13. BEAM POCKET
14. EXTERIOR STAIRS/DECKING ABOVE
15. STAIRCASE RAILING

ALGONQUIN COLLEGE

NORTH

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
3	FINAL SUBMISSION	08/08/23
2	ASSIGNMENT SUBMISSION	06/06/23
1	INTERIM SUBMISSION	16/05/23

PROJECT TITLE

MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE

BASEMENT FLOOR PLAN

DRAWN BY

STEVEN ESTAFANOS

REVIEWED BY

PROFESSOR KURT DRAPER

COURSE & SECTION


ARC 8402 - 020

SCALE

¼" = 1'-0"

SHEET NO.

A2.0

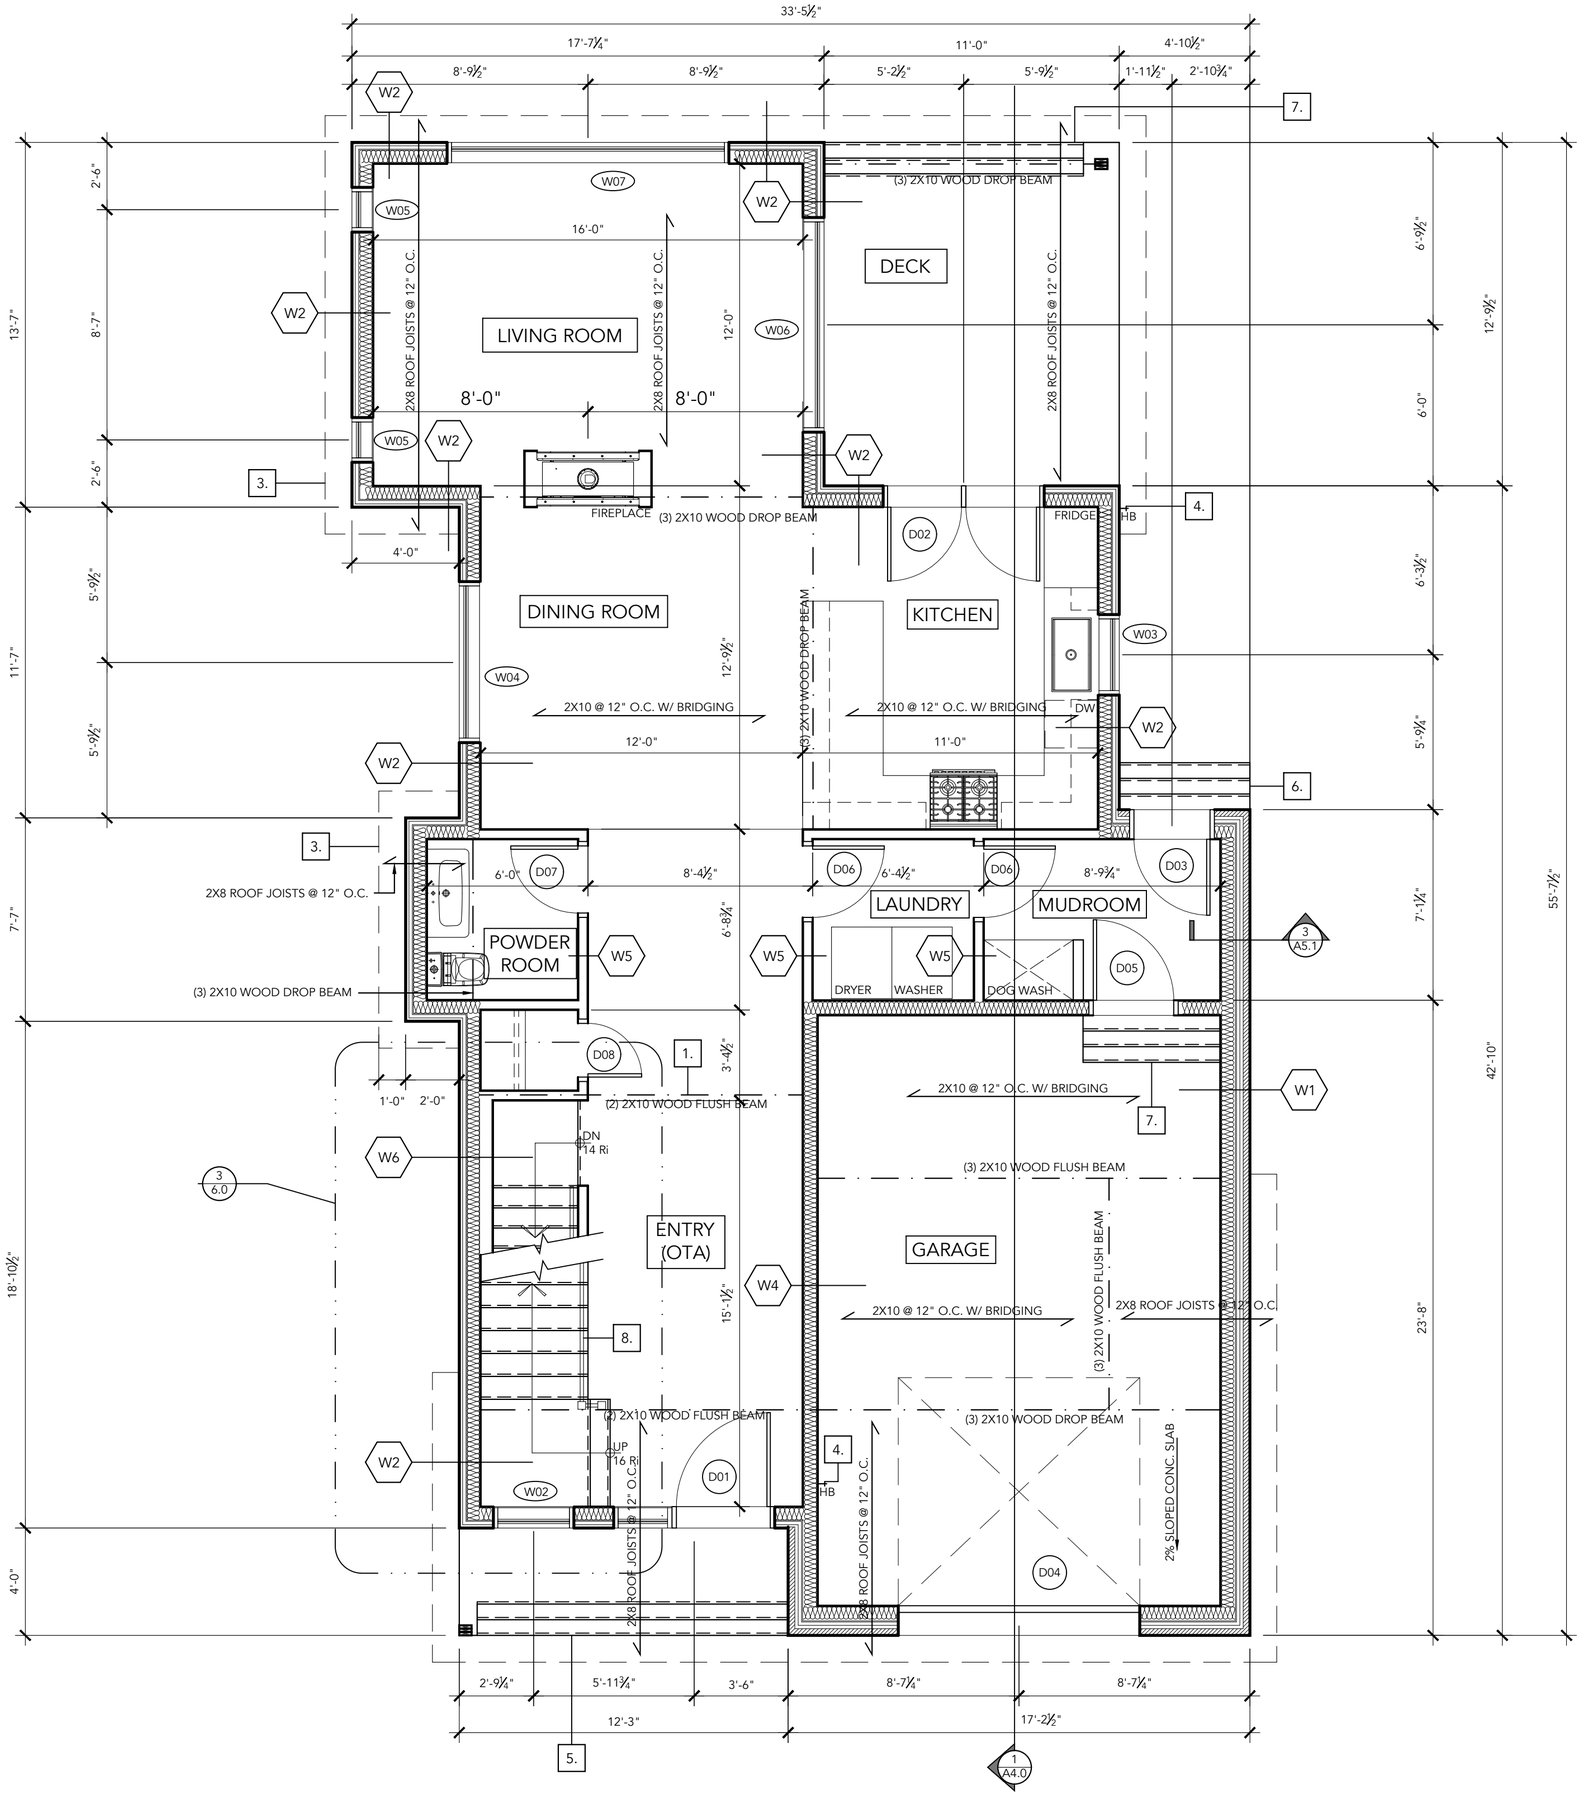

DRAWING NOTES:

1. STRUCTURAL FRAMING AROUND STAIR OPENING
2. WOOD POSTS PER STRUCTURAL ENGINEER
3. 12" ROOF OVERHANG ABOVE
4. HOSE BIBB
5. POURED-IN-PLACE CONCRETE STAIRS
6. PRE-CAST CONCRETE STAIRS
7. WOOD STAIRS
8. STAIRCASE RAILING

ALGONQUIN COLLEGE

NORTH

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
3	FINAL SUBMISSION	08/08/23
2	ASSIGNMENT SUBMISSION	06/06/23
1	INTERIM SUBMISSION	16/05/23

PROJECT TITLE

MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE

GROUND FLOOR PLAN

DRAWN BY

STEVEN ESTAFANOS

REVIEWED BY

PROFESSOR KURT DRAPER

COURSE & SECTION


ARC 8402 - 020

SCALE

¼" = 1'-0"

SHEET NO.

A2.1

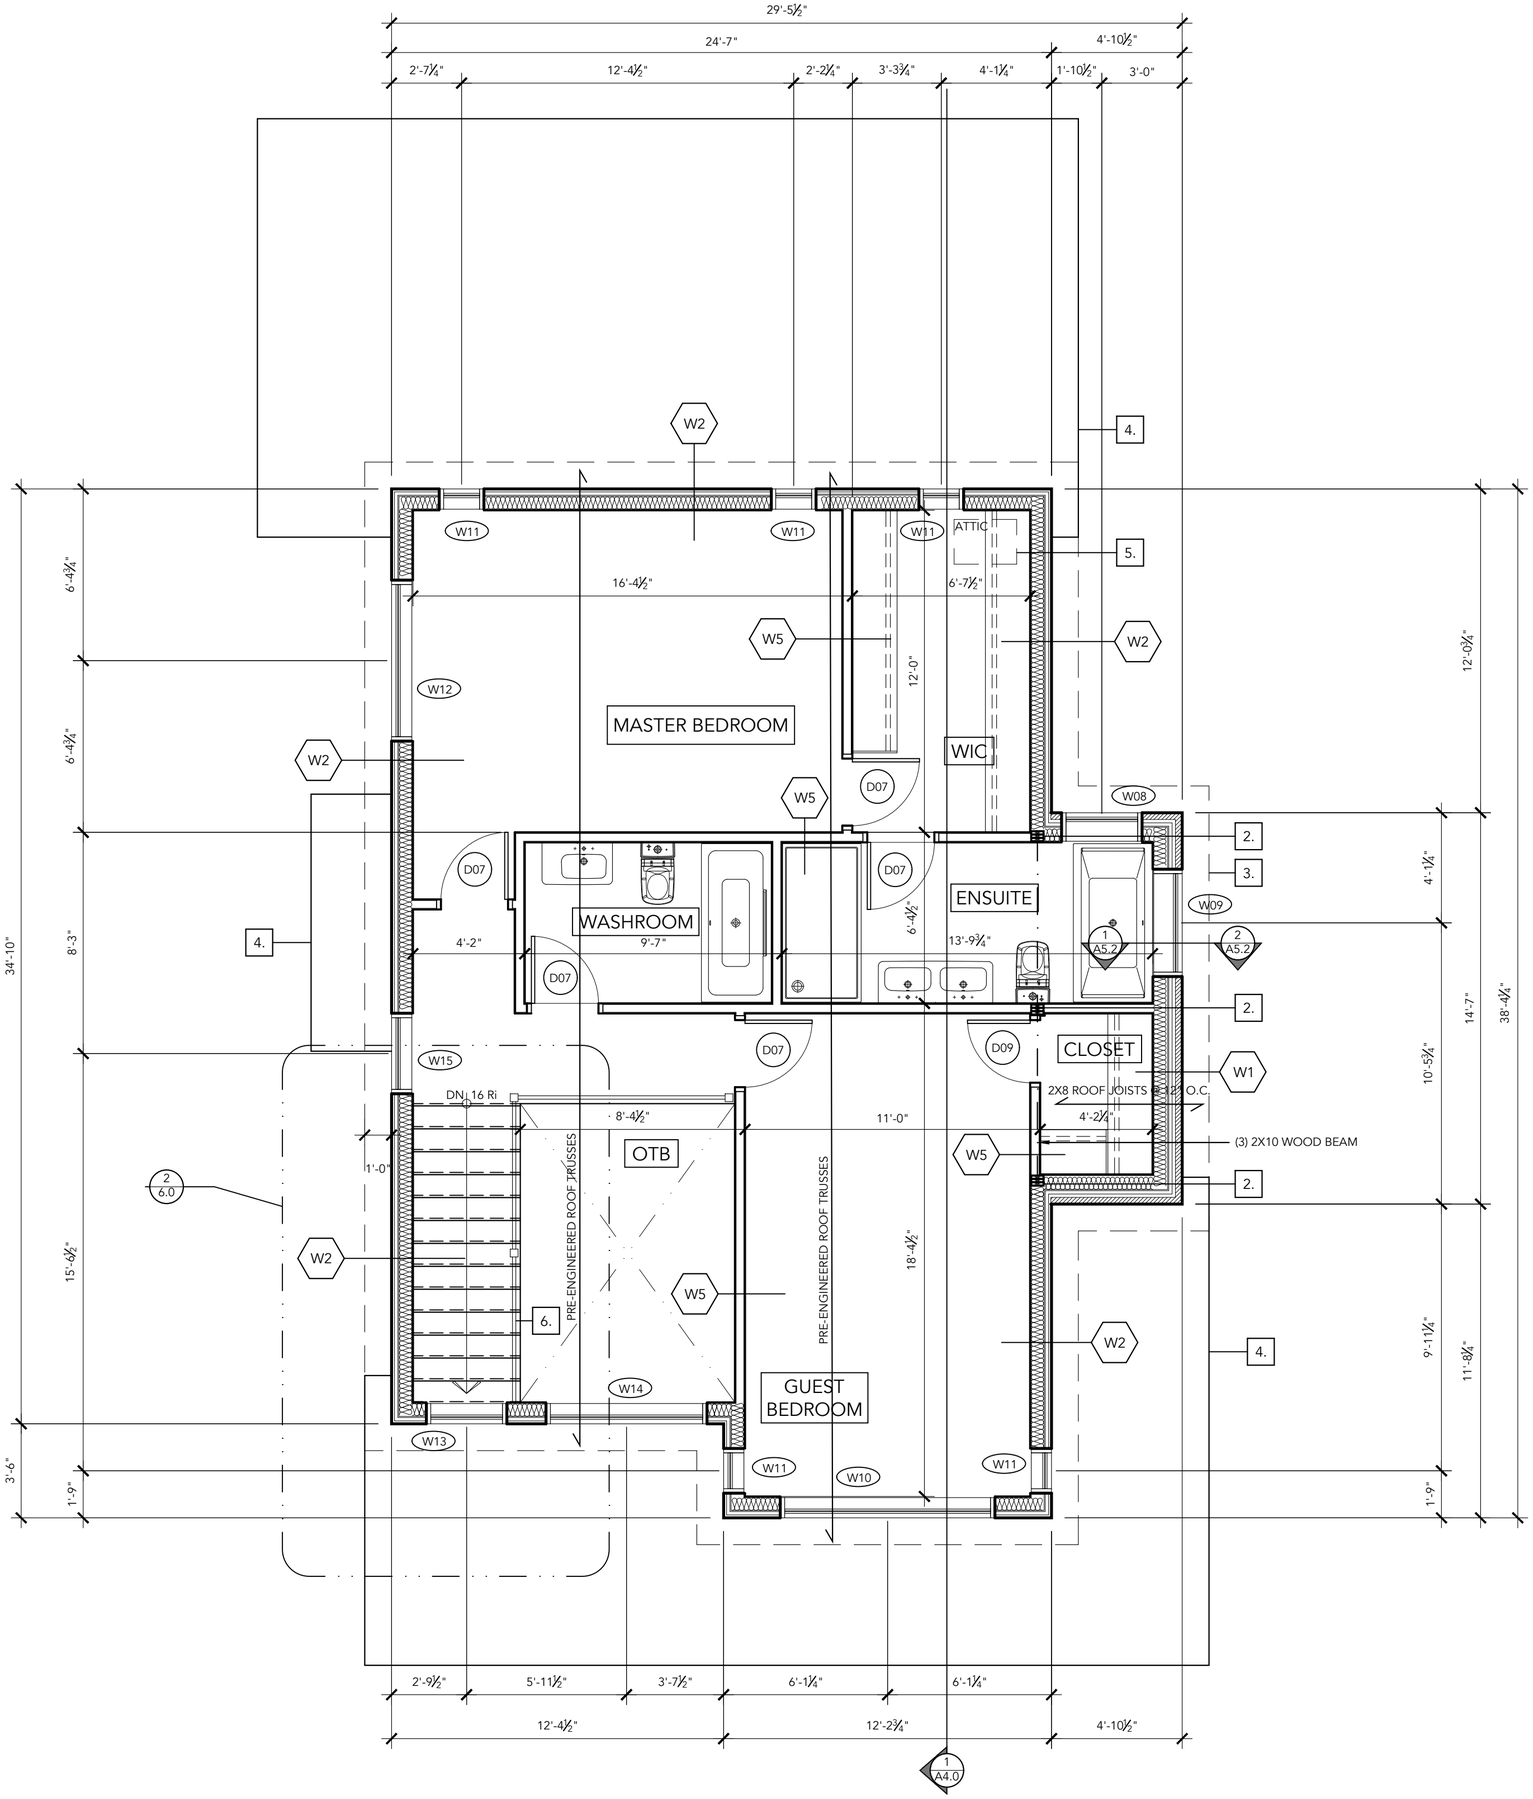

DRAWING NOTES:

1. STRUCTURAL INFO AS NOTED
2. WOOD POSTS AS NOTED
3. 12" ROOF OVERHANG ABOVE
4. LINE OF ROOF BELOW
5. ATTIC HATCH AS PER OBC 9.19.2.1.
6. STAIR RAILING

ALGONQUIN COLLEGE

NORTH

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
3	FINAL SUBMISSION	08/08/23
2	ASSIGNMENT SUBMISSION	06/06/23
1	INTERIM SUBMISSION	16/05/23

PROJECT TITLE

MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE

SECOND FLOOR PLAN

DRAWN BY

STEVEN ESTAFANOS

REVIEWED BY

PROFESSOR KURT DRAPER

COURSE & SECTION


ARC 8402 - 020

SCALE

¼" = 1'-0"


SHEET NO.

A2.2

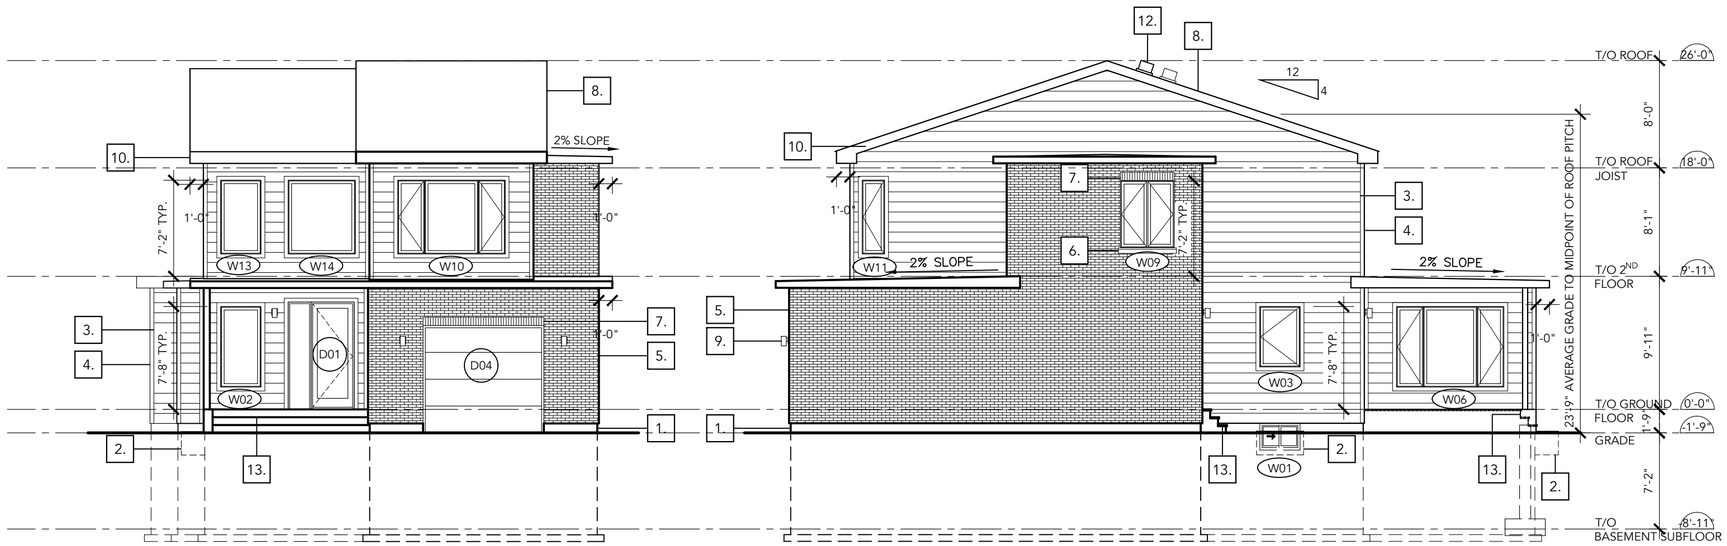

1 A3.0 EAST ELEVATION
SCALE: ⅛"=1'-0"

2 A3.0 NORTH ELEVATION
SCALE: ⅛"=1'-0"

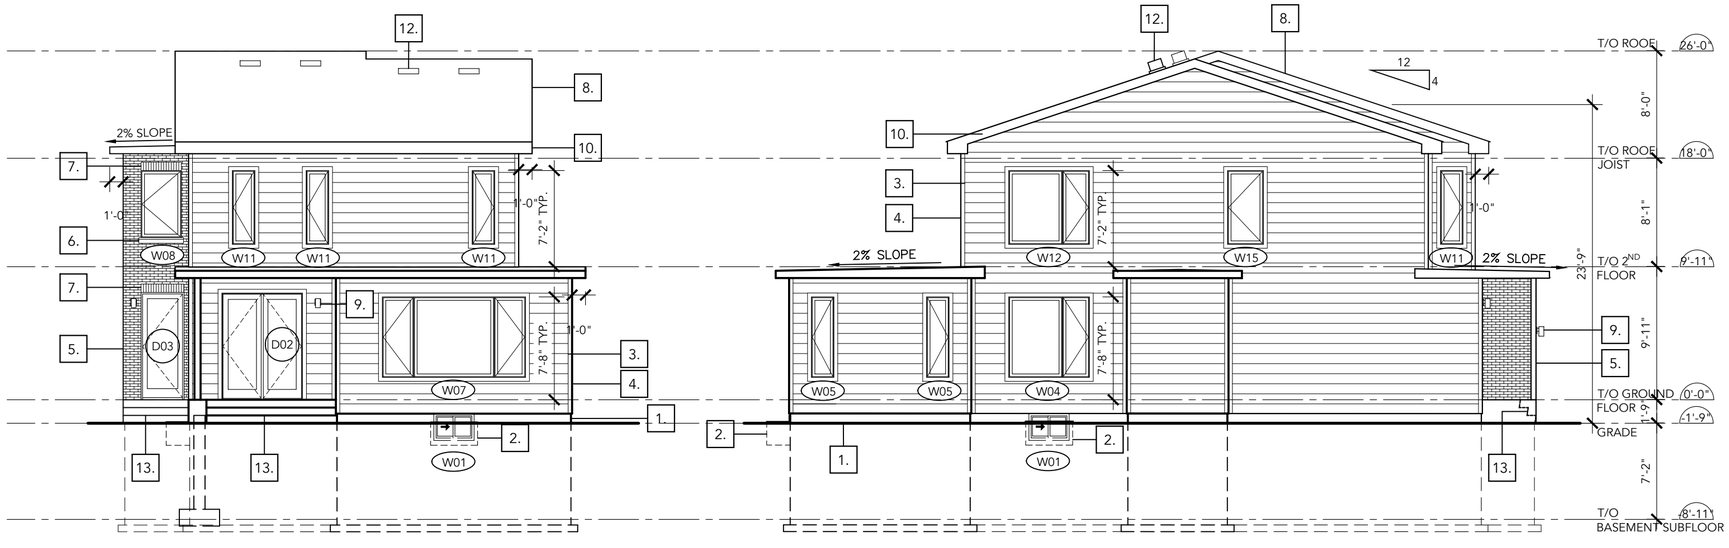

3 A3.0 WEST ELEVATION
SCALE: ⅛"=1'-0"

4 A3.0 SOUTH ELEVATION
SCALE: ⅛"=1'-0"

DRAWING NOTES:

1. CEMENT PARGING.
2. WINDOW WELL W/ DRAIN TO WEEPING TILE.
3. 8.25" HORIZONTAL HARDIEPLANK® LAP SIDING.
4. 3.5" HARDIETRIM® CEMENT BOARD AT CORNERS, WINDOWS, & DOORS.
5. BRICK VENEER.
6. PRECAST CONCRETE SILL.
7. BRICK SOLDIER COURSE.
8. ASPHALT SHINGLES.
9. EXTERIOR LIGHT FIXTURE.
10. PREFINISHED METAL FASCIA.
11. HARDIE SOFFIT, SMOOTH, VENTED.
12. BOX VENT AS PER OBC 9.19.9.2.
13. ALL EXTERIOR STEPS, REGARDLESS OF METHOD OF CONSTRUCTION, HAVE A RISE OF 7" AND A RUN OF 7" EXCLUDING CAP (8" INCLUDING CAP)
14. GRADE SLOPES AT 2%-7% AWAY FROM RESIDENCE (SEE SITE PLAN A1.0 FOR FURTHER DETAILS)

ALGONQUIN COLLEGE

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
2	FINAL SUBMISSION	08/08/23
1	ASSIGNMENT SUBMISSION	18/07/23

PROJECT TITLE
MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE
ELEVATIONS


DRAWN BY
STEVEN ESTAFANOS

REVIEWED BY
PROFESSOR KURT DRAPER

COURSE & SECTION
ARC 8402 - 020

SCALE
⅛" = 1'-0"

SHEET NO.
A3.0

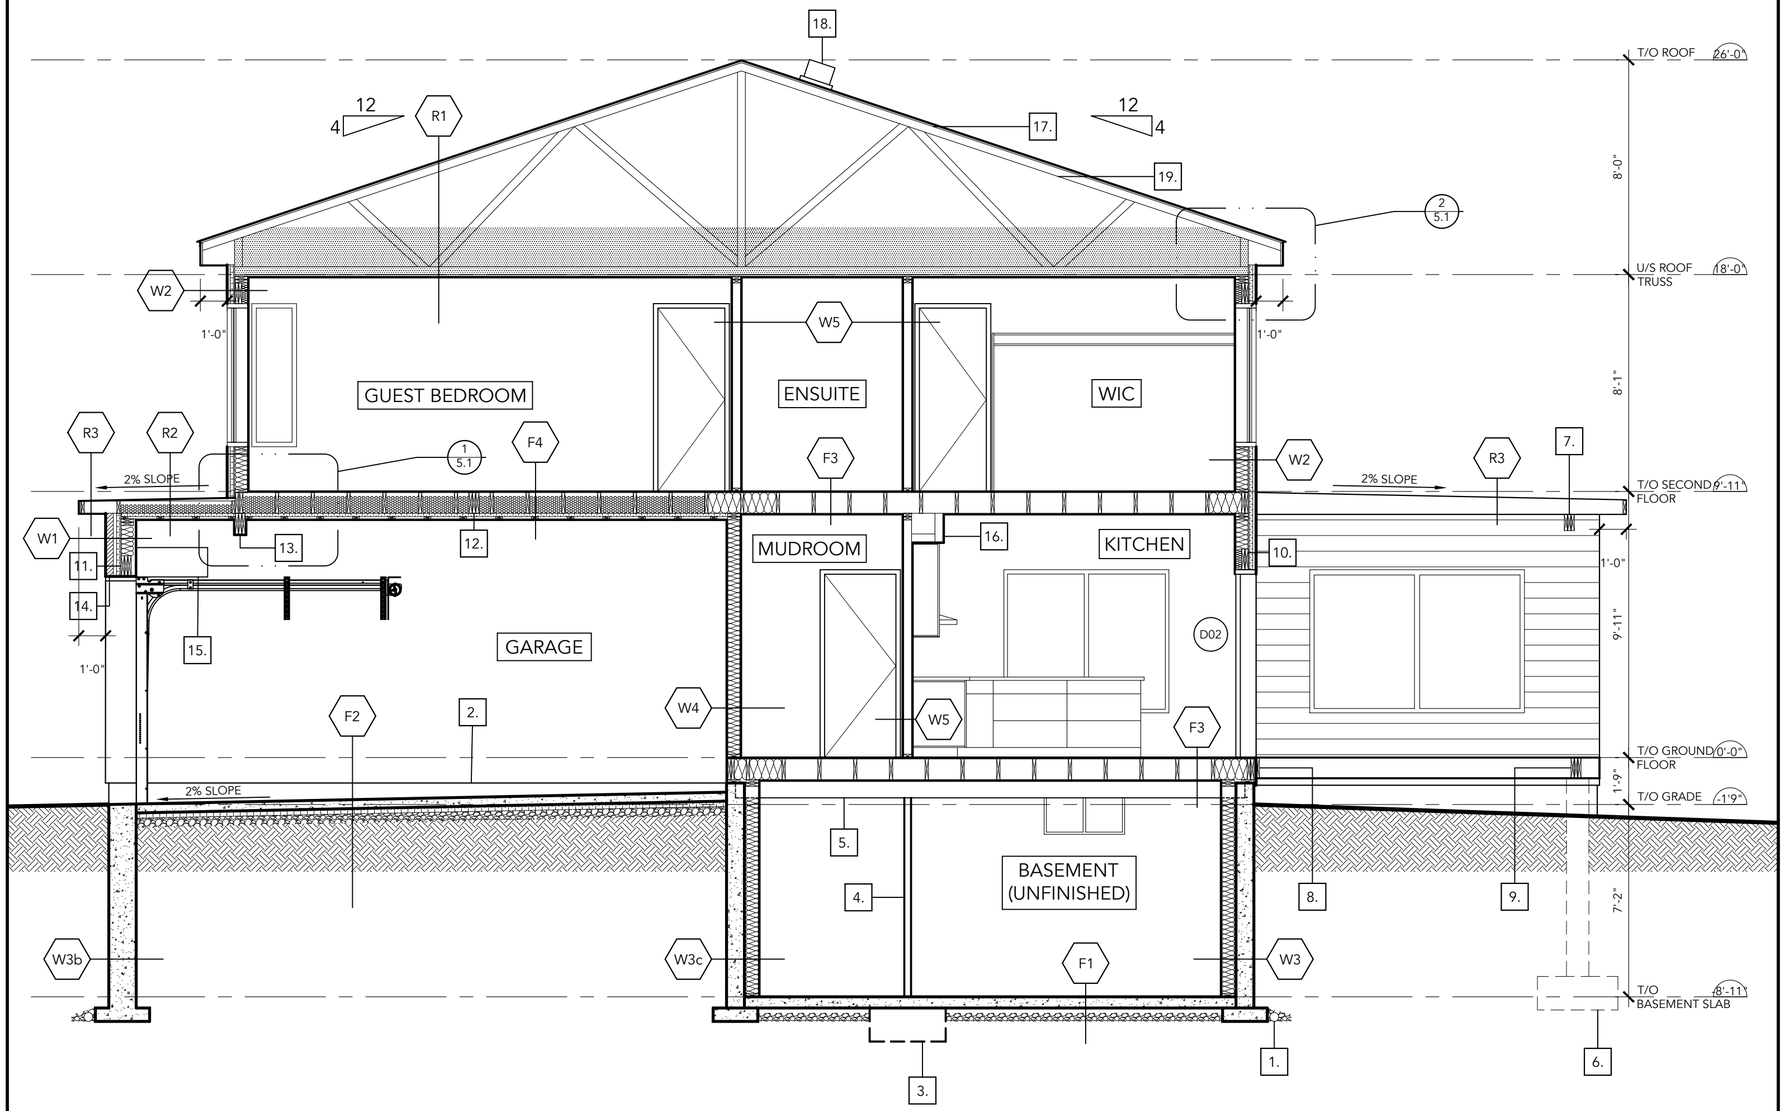

DRAWING NOTES:

1. 4" DIA. WEEPING TILE
2. LINE OF T/O FOUNDATION WALL BEYOND
3. 34"X34"X15" PAD FOOTING
4. 3" DIA. STEEL COLUMN (TELEPOST)
5. W8X21 STEEL BEAM
6. 34"X34"X14" PAD FOOTING & 10" DIA. SONO TUBE COLUMN
7. (3) 2X8 WOOD BEAM (AT REAR DECK)
8. 2X10 LEDGER BOARD (AT REAR DECK)
9. (3) 2X10 WOOD BEAM (AT REAR DECK)
10. (2) 2X10 HEADER OVER EXTERIOR DOORS & WINDOWS
11. (3) 2X10 GARAGE DOOR HEADER
12. (3) 2X10 WOOD FLUSH BEAM (OVER GARAGE)
13. (3) 2X10 DROP BEAM (OVER GARAGE)
14. STEEL LINTEL TO SUPPORT MASONRY ABOVE GARAGE DOOR OPENING
15. MOTOR AT TRACK FOR AUTOMATIC GARAGE DOOR
16. GYPSUM BULKHEAD ABOVE KITCHEN CABINETRY
17. ROOF BAFFLE
18. MUSHROOM / ROOF VENT
19. PRE-ENGINEERED ROOF TRUSS SYSTEM

ALGONQUIN COLLEGE

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
2	FINAL SUBMISSION	08/08/23
1	ASSIGNMENT SUBMISSION	27/06/23

PROJECT TITLE

MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE

SECTION

DRAWN BY

STEVEN ESTAFANOS

REVIEWED BY

PROFESSOR KURT DRAPER

COURSE & SECTION


ARC 8402 - 020

SCALE


¼" = 1'-0"

SHEET NO.


A4.0

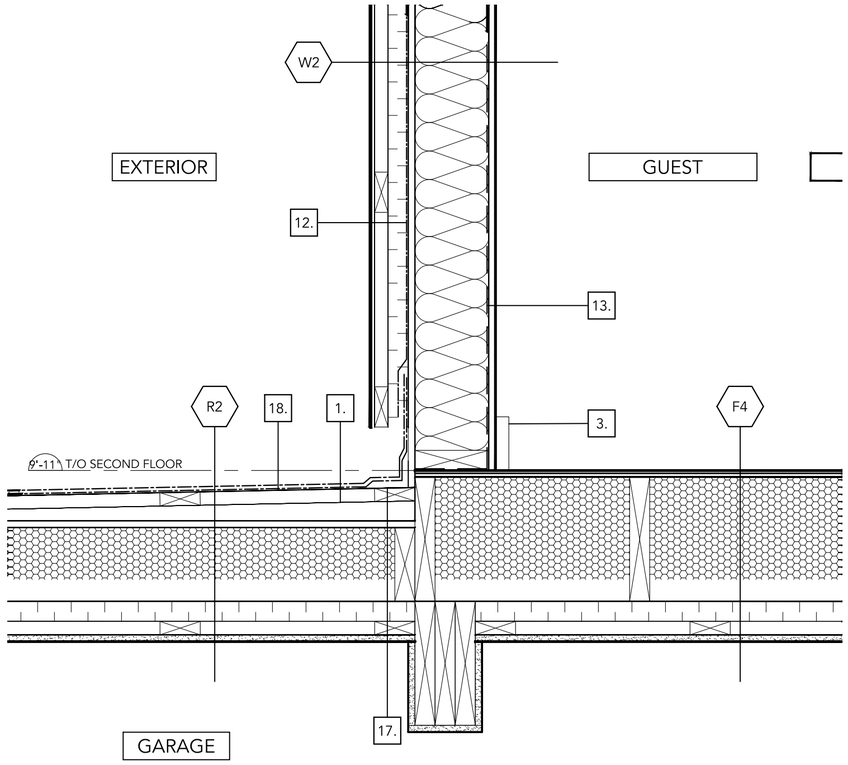

1 A5.1 FLAT ROOF DETAIL AT SECOND FLOOR EXTERIOR WALL
SCALE: 1-½"=1'-0"

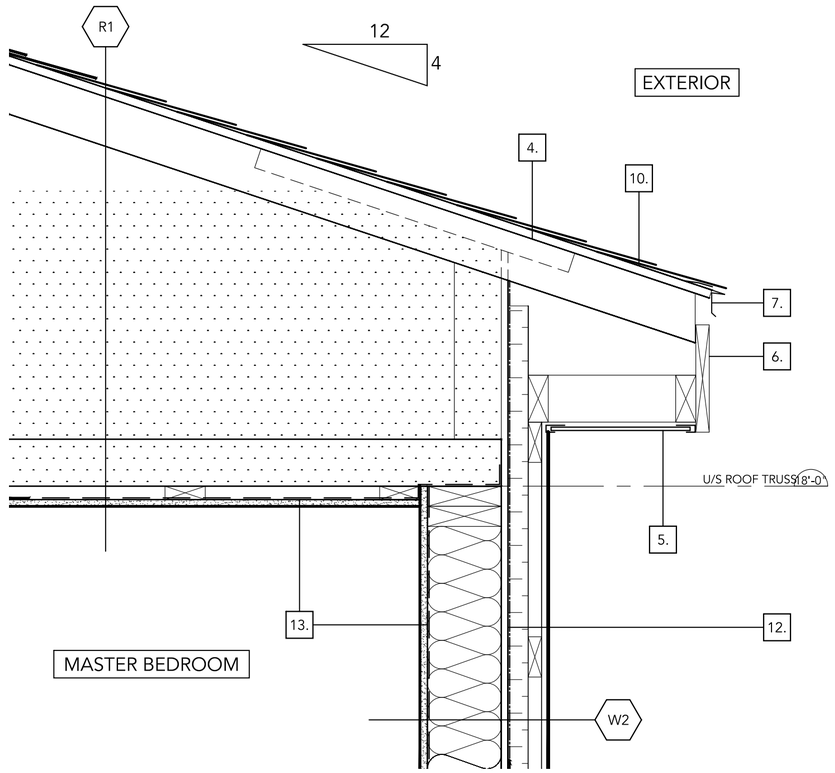

2 A5.1 EAVE DETAIL
SCALE: 1-½"=1'-0"

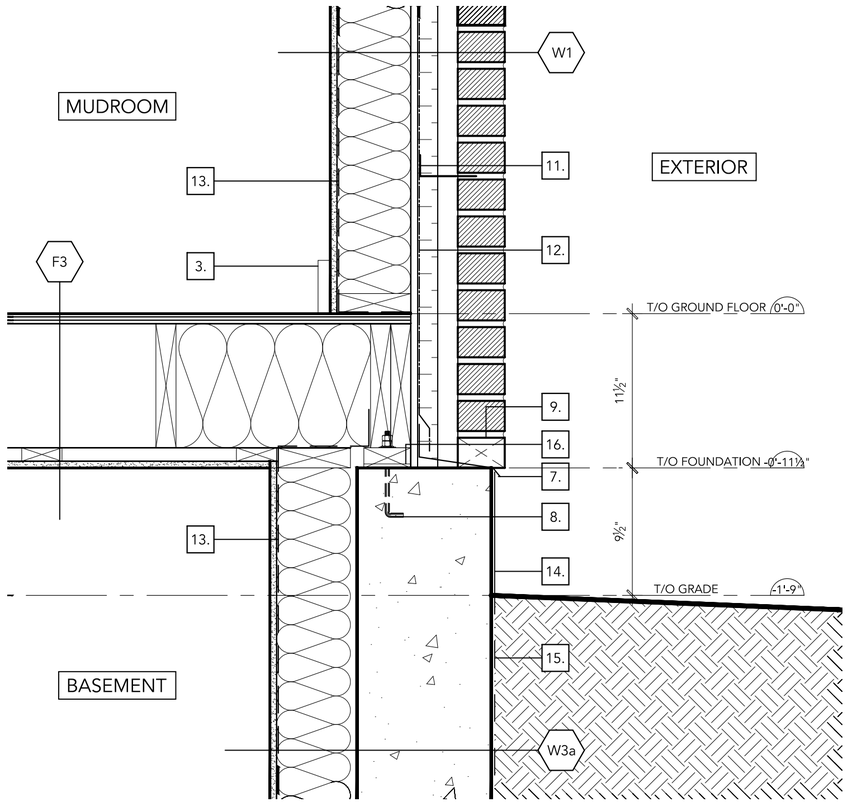

3 A5.1 FOUNDATION SILL DETAIL AT MASONRY VENEER
SCALE: 1-½"=1'-0"

DRAWING NOTES:

1. 2% SLOPED FURRING STRIPS
2. DROP DOWN BEAM (3) 2"X10"
3. BASEBOARD
4. INSULATED BAFFLE
5. HARDIE SOFFIT PANEL, VENTED SMOOTH
6. 1X8 FASCIA BOARD, FINISHED TO MATCH HARDIE TRIMS
7. METAL FLASHING C/W DRIP EDGE
8. ANCHOR BOLT
9. WEEP HOLES AT MIN. 16" O/C
10. ICE AND WEATHER SHIELD 24" FROM ROOF EDGE
11. BRICK TIE
12. AIR/WEATHER BARRIER
13. VAPOUR BARRIER
14. CEMENTITIOUS PARGING ABOVE GRADE
15. AIR GAP WATERPROOFING DIMPLE BOARD MEMBRANE DAMPPROOFING (BELOW GRADE)
16. SILL GASKET
17. LOOSE LAID INSULATION PER R1
18. IKO FAST CAP 95 2-PLY ROOF MEMBRANE

ALGONQUIN COLLEGE

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
2	FINAL SUBMISSION	08/08/23
1	ASSIGNMENT SUBMISSION	04/07/23

PROJECT TITLE
MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE
SECTION DETAILS


DRAWN BY
STEVEN ESTAFANOS

REVIEWED BY
PROFESSOR KURT DRAPER


COURSE & SECTION
ARC 8402 - 020

SCALE
AS NOTED

SHEET NO.
A5.1

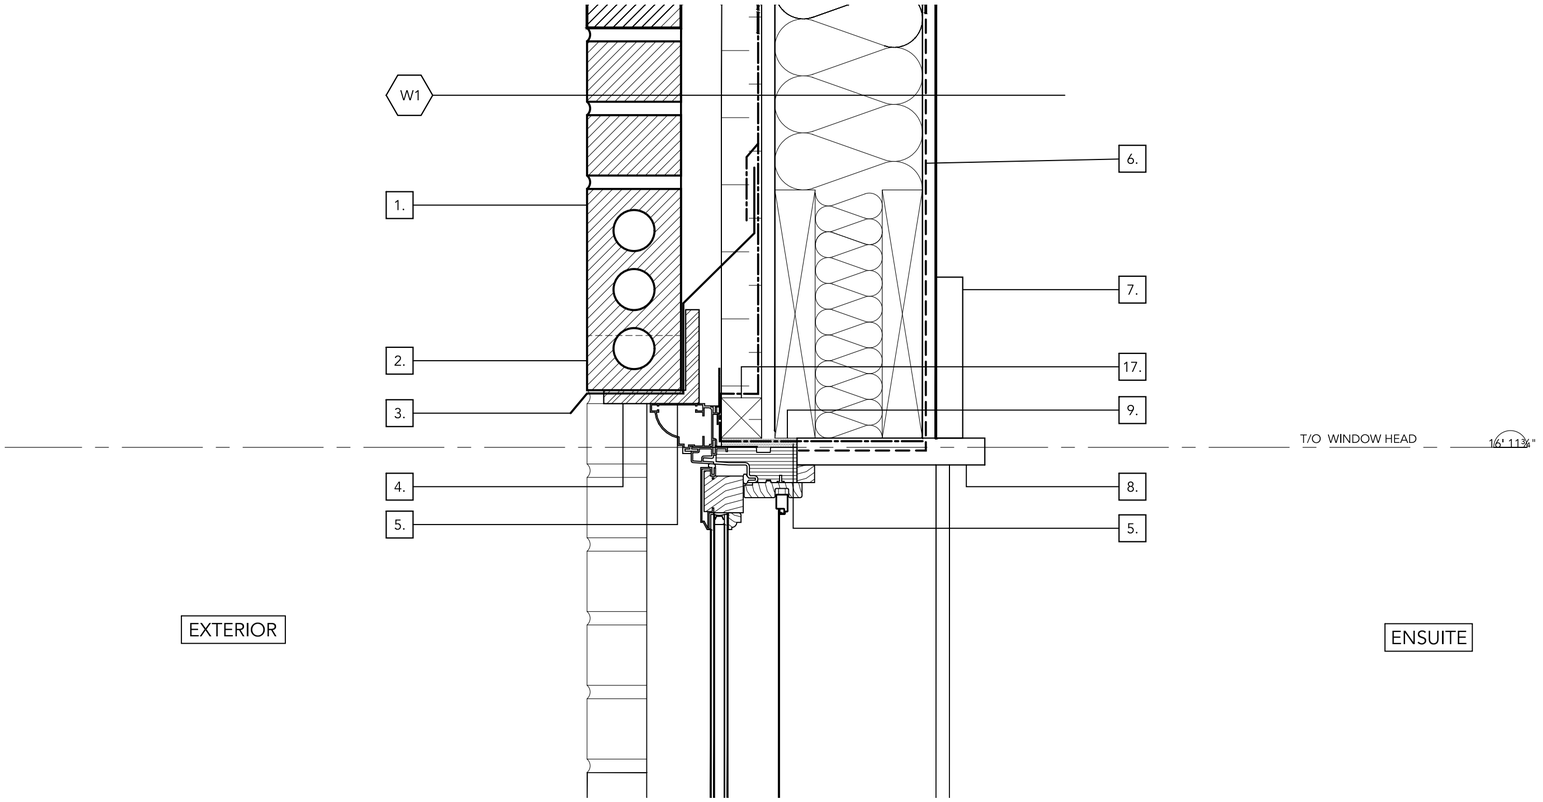

1 A5.2 WINDOW HEAD DETAIL AT BRICK
SCALE: 3"=1'-0"

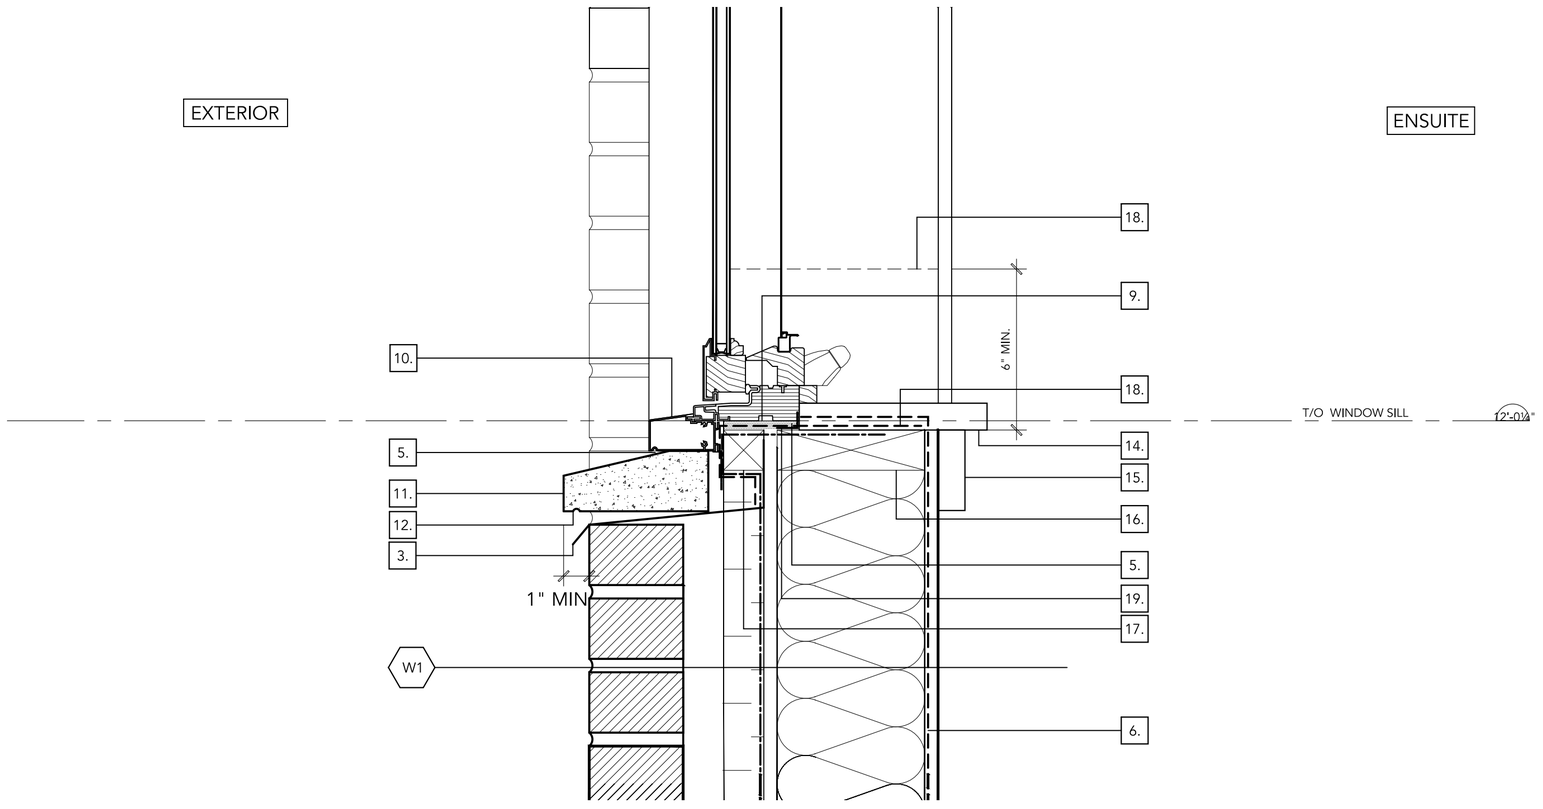

2 A5.2 WINDOW SILL DETAIL AT BRICK
SCALE: 3"=1'-0"

DRAWING NOTES:

1. SOLDIER COURSING
2. WEEP HOLES
3. ALUMINIUM FLASHING C/W DRIP EDGE
4. STEEL LINTEL
5. SEALANT
6. VAPOUR BARRIER
7. CASING
8. HEAD EXTENSION
9. LOW EXPANSION SPRAY FOAM INSULATION
10. BRICK MOULD NOSING WITH NAILING FIN
11. PRECAST CONCRETE SILL
12. DRIP EDGE
13. CEDAR SHIMS
14. 1" STOOL (SILL)
15. 1x3 APRON
16. SILL PLATE
17. 2x2 BLOCKING
18. FLEXIBLE MEMBRANE SILL FLASHING
19. METAL ANGLE BACKSTOP

ALGONQUIN COLLEGE

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
2	FINAL SUBMISSION	08/08/23
1	ASSIGNMENT SUBMISSION	25/07/23

PROJECT TITLE
MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE
WINDOW DETAILS


DRAWN BY
STEVEN ESTAFANOS

REVIEWED BY
PROFESSOR KURT DRAPER


COURSE & SECTION
ARC 8402 - 020

SCALE
AS NOTED


SHEET NO.
A5.2

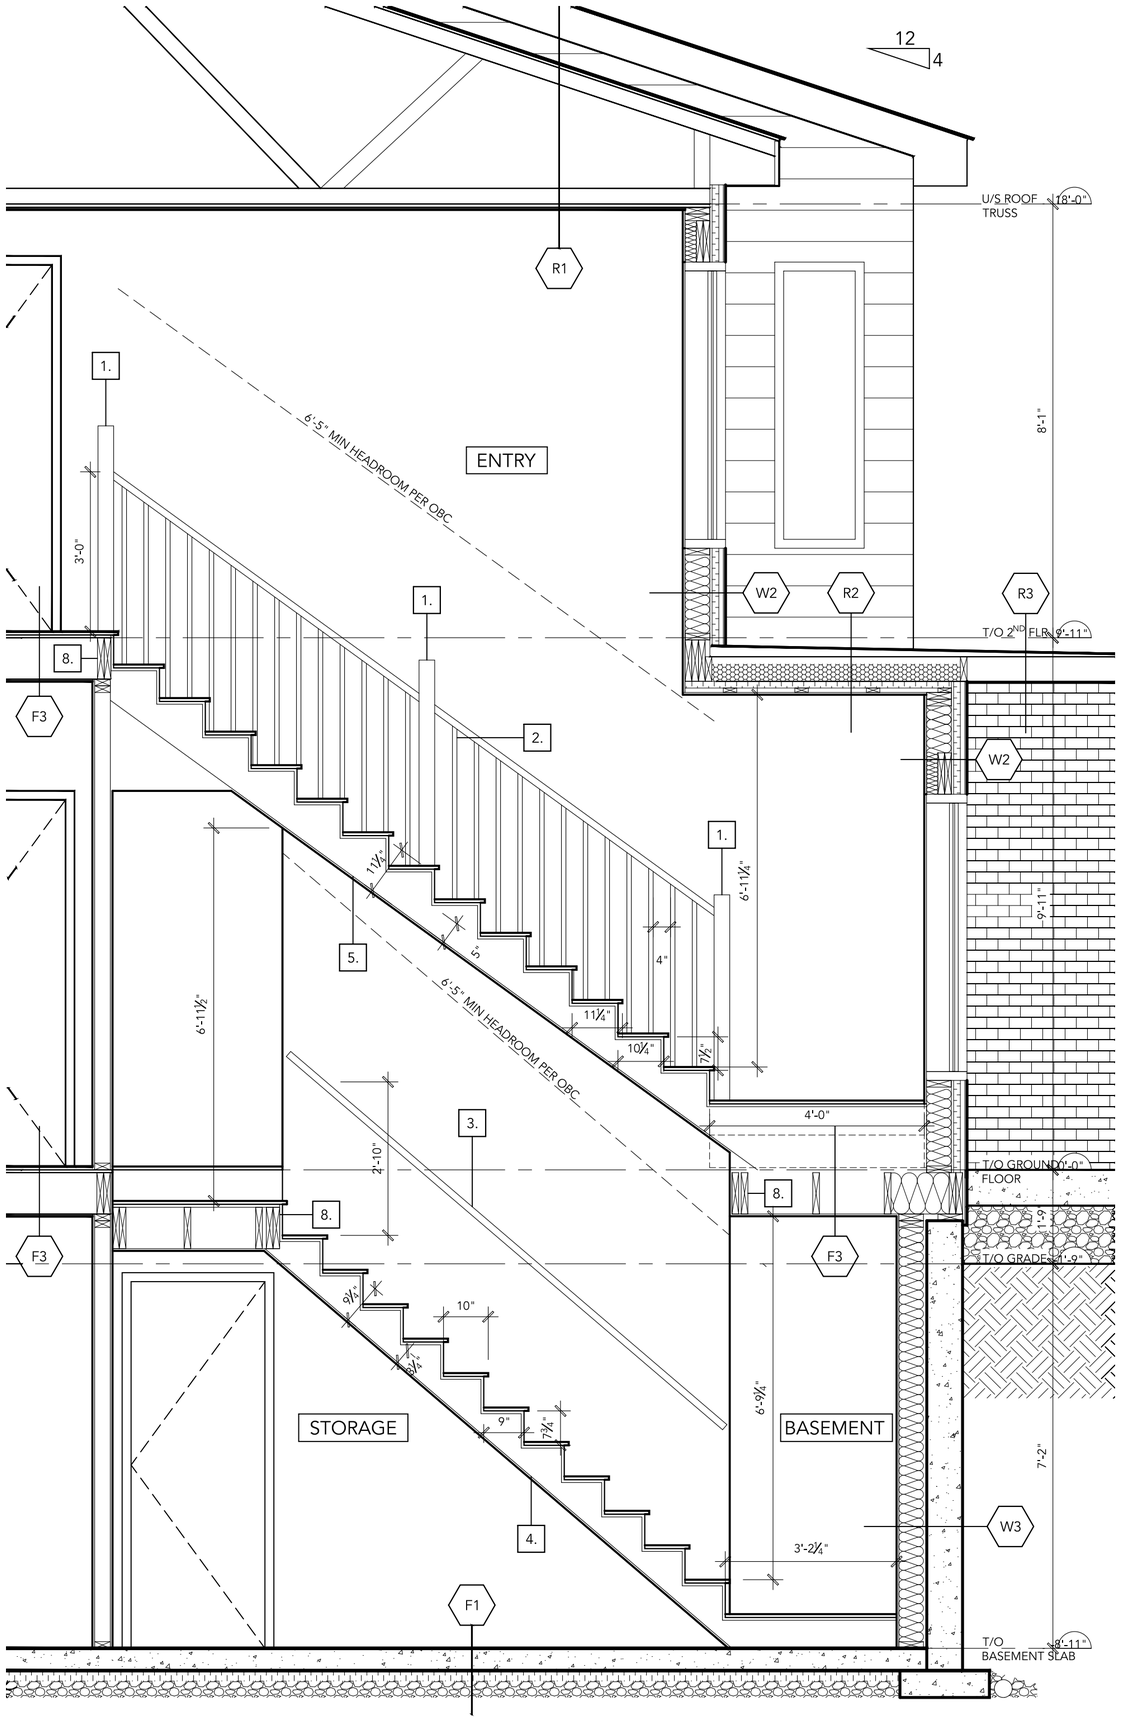


1 A6.0 STAIR SECTION
SCALE: ½"=1'-0"

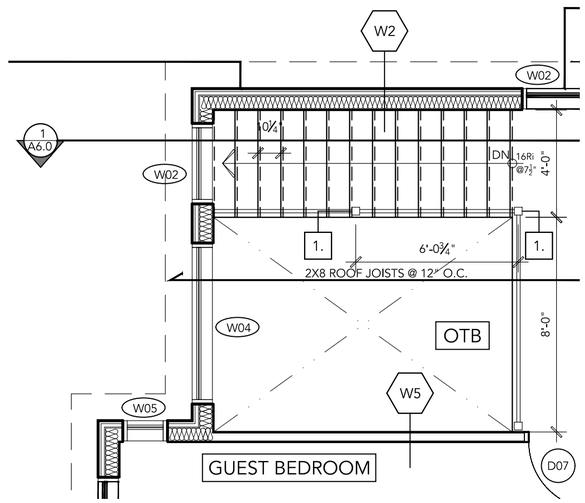

2 A6.0 SECOND FLOOR PLAN
SCALE: ¼"=1'-0"

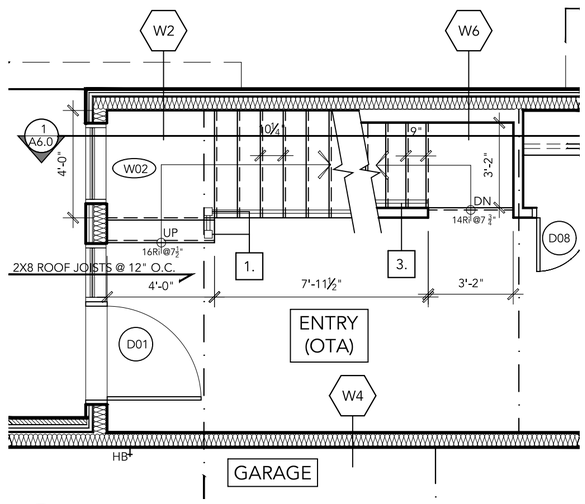

3 A6.0 GROUND FLOOR PLAN
SCALE: ¼"=1'-0"

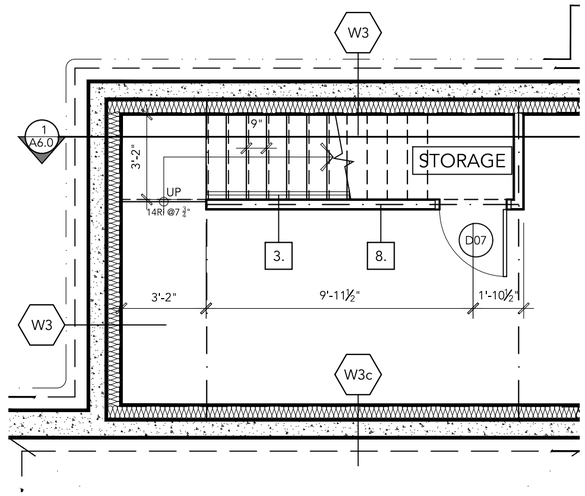

4 A6.0 BASEMENT FLOOR PLAN
SCALE: ¼"=1'-0"

DRAWING NOTES:

1. SOLID WOOD NEWEL POST
2. 1X1 WOOD PICKETS – MAX SPACE 4"
3. 1 1/2" DIA. SOLID WOOD HANDRAIL
4. 2X10 LVL STRINGER
5. 2X12 LVL STRINGER
6. 3/4" THICK HARDWOOD RISER
7. 3/4" THICK HARDWOOD TREAD W/ 1" NOSING
8. 2-2X10 STAIR OPENING & FRAMING
9. 2X4 KICK PLATE (NOT SHOWN IN DRAWING)
10. ALL HANDRAILS PER OBC 9.8.7.7.
11. ALL GUARDS PER OBC 9.8.8.1.

ALGONQUIN COLLEGE

NORTH

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODE'S LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICT OCCURS, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

NO	REVISION	DATE
2	FINAL SUBMISSION	08/08/23
2	ASSIGNMENT SUBMISSION	11/07/23
1	INTERIM SUBMISSION	04/07/23

PROJECT TITLE
MCKAY RESIDENCE
1222 CLINE CRESCENT
OTTAWA, ON K2C 2P2

DRAWING TITLE
STAIR SECTION
STAIR PLANS

DRAWN BY
STEVEN ESTAFANOS

REVIEWED BY
PROFESSOR KURT DRAPER

COURSE & SECTION
ARC 8402 - 020

SCALE
AS NOTED

SHEET NO.
A6.0