WELLINGTON PLACE

1213 WELLINGTON STREET WEST
OTTAWA, ONTARIO
K1Y 2Z8
CANADA

BUILDING STATISTICS

BUILDING HEIGHT: 10.84 m

BUILDING AREA:

BASEMENT:	188.96 m^2	(2,034 ft^2)
GROUND FLOOR:	227.96 m^2	(2,454 ft^2)
SECOND FLOOR:	221.63 m^2	(2,386 ft^2)
TOTAL GROSS AREA:	638.55 m^2	(6,874 ft^2)
TOTAL FOOTPRINT:	232.27 m^2	(2500 ft^2)

LOT AREA: 862.13 m^2 (9279.92 ft^2) (0.09 ha)

LOT COVERAGE: 26.94%

BYLAW INFORMATION

ZONING: TM11

MAXIMUM FRONT YARD SETBACK:	3.0 m
INTERIOR SIDE YARD:	NO MINIMUM
CORNER SIDE YARD:	NO MINIMUM
MINIMUM REAR YARD:	3.0 m
MAXIMUM BUILDING HEIGHT:	20.0 m
LOT DEPTH:	118'-6 1/4"
LOT FRONTAGE:	80'-1"
LEGAL DESCRIPTION:	PLAN 157 PT LOTS 1349 AND 1351
PIN 040350080	

DRAWING INDEX

A1.0	COVER SHEET
A1.1	DOOR, WINDOW, AND STRUCTURAL SCHEDULES
A2.0	SITE PLAN
AF1.0	AS FOUND BASEMENT PLAN AND ADDITIONS
AF2.0	AS FOUND GROUND FLOOR PLAN
AF3.0	AS FOUND ELEVATIONS
D1.0	GROUND FLOOR DEMOLITION PLAN
A3.0	PROPOSED GROUND FLOOR PLAN
A4.0	PROPOSED SECOND FLOOR PLAN
A5.0	PROPOSED ELEVATIONS
A6.0	BUILDING SECTION, WALL SECTION, AND DETAILS
A7.0	STAIR ADDITION PLANS, SECTION AND DETAILS

WALL ASSEMBLIES

W1 – EXISTING EXTERIOR WALL CONSTRUCTION
- BELOW THE SILL, DOUBLE MONARCH BRICK, ABOVE THE SILL METRIC MODULAR BRICK, RUNNING BOND
- 2" AIR SPACE
- ½" ASPHALT BOARD
- 2" X 6" ACTUAL DIMENTION WOOD STUDS @ 16" O.C.
- VERMICULITE INSULATION
- ¼" WOOD LATH
- ½" PLASTER FINISH

W2 – EXISTING FOUNDATION WALL CONSTRUCTION
- CEMENT PARGING, LOCATED ON THE ENTIRE SURFACE OF THE FOUNDATION WALL WAS VISIBLE AT THE TIME OF INSPECTION.
- 12" POURED CONCRETE FOUNDATION WALLS.
- 24" X 12" CONCRETE STRIP FOOTING

W3 – RENOVATED FIRST FLOOR EXTERIOR WALL
- EXISTING DOUBLE MONARCH BRICK BELOW THE SILL
- EXISTING METRIC MODULAR BRICK ABOVE THE SILL
- EXISTING 2" AIR SPACE
- EXISTING ¾" ASPHALT BOARD
- EXISTING 2" X 6" NOMINAL WOOD STUDS @ 16" O.C.
- NEW CLOSED CELL SPRAY FOAM INSULATION (R20)
- NEW ½" GYPSUM BOARD

W4 – NEW 2ND STORY EXTERIOR WALL CONSTRUCTION
- 1 1/2" VICWEST AD300–R VERTICAL STEEL SIDING
- 3" GALVANIZED STEEL FURRING "Z" BARS
- 2" EPS RIGID INSULATION (R8)
- ¾" OSB SHEATHING
- EXTERIOR AIR BARRIER (E.G. TYVEK)
- NOMINAL 2"X6" WOOD STUDS AT 16" O.C.
- FIBERGLASS BATT INSULATION (R21)
- 6 MIL POLY VAPOUR BARRIER
- ½" GYPSUM BOARD

W5 – NEW 1ST FLOOR EXTERIOR WALL CONSTRUCTION AT STAIRCASE (R8)
- 3–1/2" MASONRY CLADDING TO MATCH THE EXISTING BUILDING
- USE SILLS AS REQUIRED SIMILAR TO THE MAIN BUILDING
- 2" AIR GAP
- MORTAR CONTROL DEVICE AND WEEP HOLES
- 2" RIGID INSULATION (R8)
- AIR–WEATHER RETARDER TREATMENT OVER CMU
- NOMINAL 8" CONCRETE BLOCK

W6 – NEW 2ND STORY EXTERIOR WALL CONSTRUCTION AT STAIRCASE (R8)
- 1 1/2" VICWEST AD300–R VERTICAL STEEL SIDING
- 3" GALVANIZED STEEL, THERMALLY BROKEN, "Z" GIRTS
- 2" EPS RIGID INSULATION (R8)
- AIR–WEATHER RETARDER TREATMENT OVER CMU
- NOMINAL 8" CONCRETE BLOCK

W7 – NEW PARTITION BETWEEN BUILDING AND NEW STAIRCASE FOUNDATION
- ⅝" GYPSUM BOARD TYPE X
- NOMINAL 8" CONCRETE BLOCK

W8 – NEW FOUNDATION WALL ASSEMBLY (R8)
- 4" DIA. FOUNDATION DRAINAGE C/W MEMBRANE
- UNDERLAYMENT 6 MIL DAMPROOFING
- PARGING ON THE EXTERIOR SIDE OF THE FND WALL ABOVE GRADE
- 12" 25 MPA POURED CONCRETE FOUNDATION WALL
- 2" RIGID INSULATION (R8)

PARAPET ASSEMBLIES

PT1 – NEW MAIN BUILDING PARAPET ASSEMBLY
- 1 ½" VICWEST AD300–R VERTICAL STEEL SIDING
- 3" GALVANIZED STEEL FURRING "Z" BARS
- 2" EPS RIGID INSULATION (R8)
- ¾" OSB SHEATHING
- EXTERIOR AIR BARRIER (E.G. TYVEK)
- NOMINAL 2"X6" WOOD STUDS AT 16" O.C.
- 6 MIL POLY VAPOUR BARRIER
- ½" OUTDOOR GYPSUM BOARD

PT2 – PARAPET AT BALCONY
- EXISTING METRIC MODULAR BRICK
- EXISTING 2" AIR SPACE
- EXISTING ¾" ASPHALT BOARD
- EXISTING 2" X 6" NOMINAL WOOD STUDS @ 16" O.C.
- NEW CLOSED CELL SPRAY FOAM INSULATION (R20)
- NEW ½" OUTDOOR GYPSUM BOARD

PT3 – PARAPET ABOVE STAIRCASE
- 1 ½" VICWEST AD300–R VERTICAL STEEL SIDING
- 3" GALVANIZED STEEL, THERMALLY BROKEN, "Z" GIRTS
- 2" EPS RIGID INSULATION (R8)
- AIR–WEATHER RETARDER TREATMENT OVER CMU
- NOMINAL 8" CONCRETE BLOCK
- NOMINAL 2"X4" WOOD STUDS AT 16" O.C.
- FIBERGLASS BATT INSULATION (R13)
- NEW ½" OUTDOOR GYPSUM BOARD

FLOOR ASSEMBLIES

F1 – EXISTING BASEMENT FOUNDATION
- EXISTING 4" SLAB ON GRADE
- EXISTING 6" GRANULAR 'A'
- EXISTING UNDISTURBED SOIL

F2 – GROUND FLOOR FLOORING
- FLOOR FINISH
- EXISTING 1/2" PLYWOOD SUBFLOOR
- EXISTING 1"X6" WOOD DECK
- EXISTING 2"X12" FLOOR JOISTS @ 12" O.C.

F3 – SECOND FLOOR FLOORING
- FLOOR FINISH
- 5/8" T&G PLYWOOD SUBFLOOR
- 2"X12" TJI 230 FLOOR JOISTS @ 12" O.C.
- 1"X3" WOOD STRAPPING
- 5/8" TYPE 'X' GYPSUM BOARD

F4 – BALCONY FLOORING
- SBS TORCH–ON MEMBRANE – 2 PLY WITH GRAY CAP SHEET.
- ¼" DENSDECK PRIME ROOF BOARD.
- ¾" PLYWOOD SHEATHING
- FURRING TO SLOPE 2% TO BALCONY SCUPPER.
- ½" PLYWOOD SHEATHING.
- 2"X10" TJI 230 WOOD JOISTS @ 16" O.C.
- 1"X3" WOOD STRAPPING TO THE U/S OF JOISTS.
- ¼" NON–VENTED CEMENT BOARD PANELS

F5 – NEW STAIRWELL FLOOR SLAB
- 4" 20 MPA POURED CONCRETE SLAB
- 10MIL POLYETHYLENE VAPOUR BARRIER
- 2" EXPANDED POLYSTYRENE RIGID INSULATION (R8)
- 6" COURSE GRANULAR COMPACTED FILL

F6 – LANDINGS AT STAIRCASE
- 4" POURED CONCRETE
- 1–½" METAL DECKING

ROOF ASSEMBLIES

R1 – NEW ROOF ASSEMBLY (R)
- SBS TORCH–ON MEMBRANE – 2 PLY WITH GRAY CAP SHEET.
- ¼" DENSDECK PRIME ROOF BOARD.
- ½" PLYWOOD SHEATHING.
- FURRING TO SLOPE 2% TO ROOF SCUPPERS.
- ½" PLYWOOD SHEATHING.
- 2"X12" WOOD JOISTS @ 16" O.C.
- 4 ½" POLYURETHANE SPRAY FOAM TO U/S OF SHEATHING (R27).
- 6" ROCKWOOL COMFORTBATT STONE WOOL INSULATION (R22).
- 6MIL POLYETHYLENE VAPOUR BARRIER.
- 1"X3" WOOD STRAPPING TO THE U/S OF JOISTS.
- ⅝" GYPSUM BOARD (ALL SEAMS TAPED AND MUDDED).
- 3 COATS LATEX PAINT.

R2 – NEW ROOF ASSEMBLY (RO)
- SBS TORCH–ON MEMBRANE – 2 PLY WITH GRAY CAP SHEET.
- ¼" DENSDECK PRIME ROOF BOARD.
- ½" PLYWOOD SHEATHING.
- FURRING TO SLOPE 2% TO ROOF SCUPPERS.
- ½" PLYWOOD SHEATHING.
- 2"X12" WOOD JOISTS @ 16" O.C.
- 6MIL POLYETHYLENE VAPOUR BARRIER.
- 1"X3" WOOD STRAPPING TO THE U/S OF JOISTS.
- SOFFIT FINISH

R3 – NEW STAIRCASE ROOF ASSEMBLY (R16–20)
- 2" DEEP ROOF GRAVEL
- ONE PLY EPDM ROOFING MEMBRANE
- 4"–6" TAPERED RIGID INSULATION (R16–20).
- ½" FIBREBOARD
- 1–½" STEEL DECK
- 16" DEEP O.W.S.J

PARTITION ASSEMBLIES

P1 – EXISTING INTERIOR PARTITION CONSTRUCTION
- ½" PLASTER FINISH
- ¼" WOOD LATH
- 2" X 4" WOOD STUDS @ 16" O.C.
- ¼" WOOD LATH
- ½" PLASTER FINISH

P2 – EXISTING INTERIOR PLUMBING WALL CONSTRUCTION
- ½" PLASTER FINISH
- ¼" WOOD LATH
- 2" X 6" WOOD STUDS @ 16" O.C.
- ¼" WOOD LATH
- ½" PLASTER FINISH

P3 – NEW PARTITION CONSTRUCTION
- ½" GYPSUM BOARD
- NOMINAL 2" X 4" WOOD STUDS @ 16" O.C.
- ½" GYPSUM BOARD

P4 – NEW PARTITION CONSTRUCTION (PLUMBING WALLS)
- ½" GYPSUM BOARD
- NOMINAL 2"X6" WOOD STUDS AT 16" O.C.
- ½" GYPSUM BOARD


P5 – NEW PARTITION CONSTRUCTION 1HR F.R.R. (BETWEEN RESIDENTIAL UNITS)
- ⅝" GYPSUM BOARD TYPE X
- NOMINAL 2" X 4" WOOD STUDS @ 16" O.C.
- 1" AIR SPACE
- NOMINAL 2" X 4" WOOD STUDS @ 16" O.C.
- ⅝" GYPSUM BOARD TYPE X

P6 – NEW PARTITION CONSTRUCTION 1HR F.R.R. (BETWEEN APARTMENTS AND CORRIDORS)
- ⅝" GYPSUM BOARD TYPE X
- NOMINAL 2" X 4" WOOD STUDS @ 16" O.C.
- ⅝" GYPSUM BOARD TYPE X



OBC DATA SHEET

ITEM	ONTARIO BUILDING CODE DATA MATRIX PARTS 3 & 9		OBC REFERENCE
1	Project Description: ☐ New ☒ Addition ☒ Alteration ☒ Change of Use	☐ Part 11	☐ Part 3 ☒ Part 9
2	Major Occupancy(s): GROUP C: RESIDENTIAL & GROUP D: OFFICE		3.1.2.1.(1)
3	Building Area (sq. m.) Existing: 214 New: 234 Total: 448		1.1.3.2
4	Gross Area: Existing: 405 New: 234 Total: 639		1.1.3.2
5	Number of Storeys: Above Grade: 2 Below Grade: 1		3.2.1.1. & 1.1.3.2.
6	Building Height (m): 10.84		
7	Number of Streets / Access Routes: 2		3.2.2.10 & 3.2.5.5.
8	Sprinkler System Proposed: ☐ Entire Building ☐ Basement only ☐ In lieu of roof rating ☒ not required		3.2.2.17
9	Building Classification: 2 STOREYS		3.2.2.61 & 3.2.2.48
10	Standpipe Required: ☐ Yes ☒ No		3.2.9
11	Fire Alarm required: ☒ Yes ☐ No		3.2.4
12	Water Services / Supply is Adequate: ☒ Yes ☐ No		
13	High Building: ☐ Yes ☒ No		3.2.6.1.
14	Permitted Construction: ☒ Combustible ☐ Non–combustible or both Actual Construction: ☒ Combustible ☐ Non–combustible or both		3.2.2.47 & 3.2.2.6
15	Mezzanines(s) Area in sq. m.: –		
16	Occupant Load based on: ☒ sq. m. per person ☒ design of building Basement: Occupancy – Load – persons 1st Floor: Occupancy D Load 19 persons 2nd Floor: Occupancy C Load 8 persons 3rd Floor: Occupancy ____ Load ____ persons		3.1.16
17	Barrier Free Design: ☒ Yes ☐ No (explain)		3.8
18	Hazardous Substances: ☐ Yes ☒ No		3.3.1.2
19	Required Fire Resistance Rating (FRR) — Horizontal Assemblies FRR (Hours): Floors: 1 Hours; Roof: – Hours; Mezzanine: – Hours — Listed Design No. or Description (SG–2)		3.2.3.7 3.2.2.61 3.2.2.48 3.1.3.1(2)
	FRR of Supporting Members: Floors: – Hours; Roof: – Hours; Mezzanine: – Hours — Listed Design No. or Description (SG–2)		

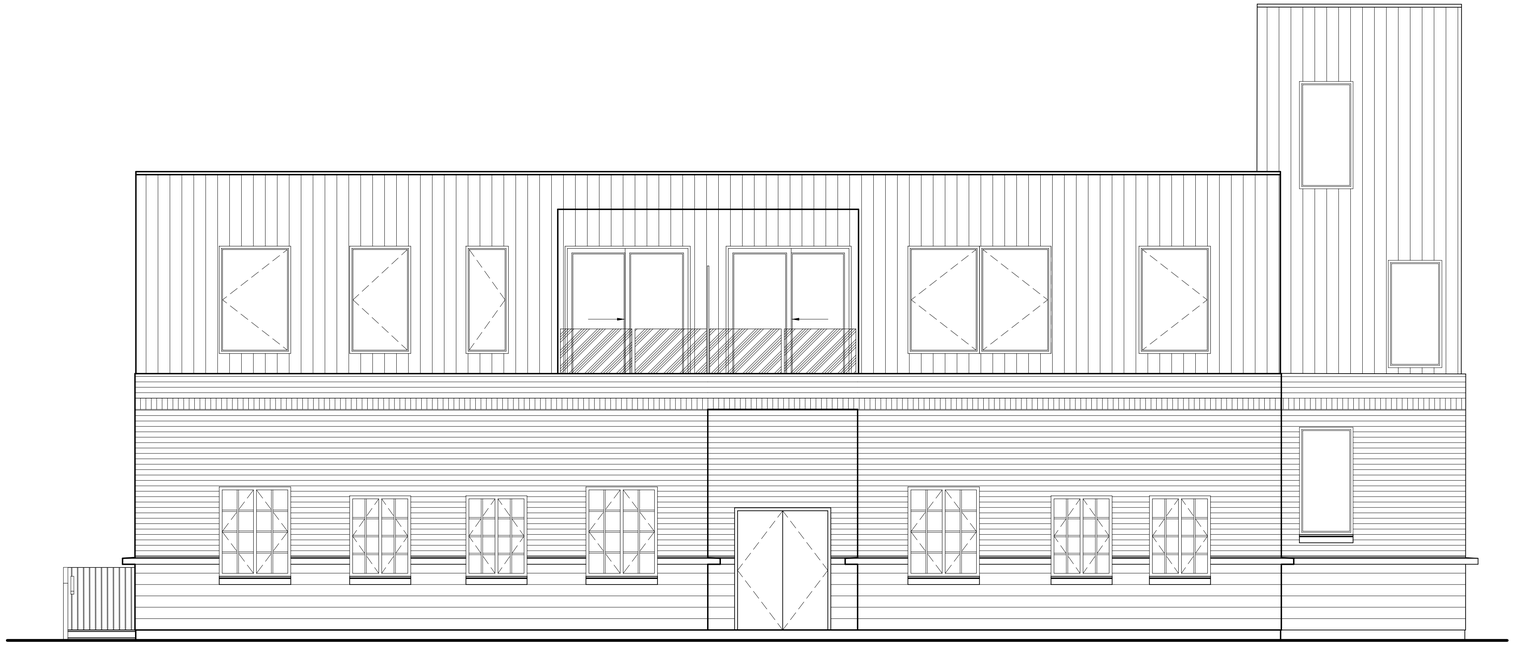

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:
1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

Rev.	YY/MM/DD	Revision
1	24/04/16	FINAL SUBMISSION

Project Name: WELLINGTON PLACE, OTTAWA, ON

Sheet Title: COVER SHEET

Group Number: ARC8403–010

Project North:

Drawn By: STEVEN ESTAFANOS

Date: 2024/04/16

Scale: N/A

Project No.: 2024–01

Drawing No.: A1.0

DOOR SCHEDULE (D#####)			
TAG #	SIZE	RSO	NOTES
D100	(2) 36"x82"	74"x83"	EXTERIOR GRADE DOORS WITH MIN. 20% GLAZING (REPLACES ORIGINAL FRONT DOOR SO HEIGHT IS NOT STANDARD – TBC ON SITE)
D100A	(2) 36"x84"	74"x85"	EXTERIOR GRADE DOORS WITH MIN. 20% GLAZING
D101	(2) 36"x84"	98"x109"	EXTERIOR GRADE DOORS WITH MIN. 20% GLAZING (REPLACES OVERHEAD GARAGE DOOR WITH GLASS SIDE PANELS AND TRANSOM WINDOW ABOVE)
D102	32"x96"	33"x97"	
D103	32"x96"	33"x97"	
D104	36"x96"	37"x97"	BATHROOM DOOR C/W ACCESSIBLE ELECTRONIC DOOR SWITCH
D105	36"x96"	37"x97"	BATHROOM DOOR C/W ACCESSIBLE ELECTRONIC DOOR SWITCH
D106	22"x96"	23"x97"	
D107	32"x96"	33"x97"	
D108	32"x96"	33"x97"	
D110	32"x96"	33"x97"	
D111	32"x96"	33"x97"	
D112	36"x84"	37"x85"	EXTERIOR GRADE DOOR WITH MIN. 20% GLAZING
D113	32"x84"	33"x85"	EXTERIOR GRADE DOOR WITH MIN. 20% GLAZING (REPLACES WINDOW OPENING)
D200	36"x84"	37"x85"	FIRE ESCAPE DOOR WITH MIN 20% GLAZING
D200A	22"x84"	23"x85"	
D200B	(2) 18"x36"	38"x38"	ACCESS CLOSET DOOR FOR ELECTRICAL CLOSET
D201	36"x82"	37"x83"	FIRE SAFETY DOOR FOR CONDO ENTRY
D201A	(2) 18"x82"	38"x83"	
D201B	30"x82"	31"x83"	
D203	84"x96"	85"x97"	BALCONY SLIDER EXTERIOR DOORS
D206	32"x82"	33"x83"	
D206A	(2) 18"x82"	38"x83"	
D206B	(2) 18"x82"	38"x83"	
D207	30"x82"	31"x83"	
D208	32"x82"	33"x83"	
D208A	(2) 18"x82"	38"x83"	
D209	30"x82"	31"x83"	
D210	36"x82"	37"x83"	FIRE SAFETY DOOR FOR CONDO ENTRY
D210A	(2) 18"x82"	38"x83"	
D210B	30"x82"	31"x83"	
D212	84"x96"	85"x97"	BALCONY SLIDER EXTERIOR DOORS
D215	32"x82"	33"x83"	
D215A	(2) 18"x82"	38"x83"	
D215B	(2) 18"x82"	38"x83"	
D216	30"x82"	31"x83"	
D217	32"x82"	33"x83"	
D217A	(2) 18"x82"	38"x83"	
D218	30"x82"	31"x83"	
D300	36"x84"	37"x85"	EXTERIOR GRADE DOOR WITH MIN. 20% GLAZING

WINDOW SCHEDULE (W###)			
TAG #	SIZE	RSO	QTY
W01	2'-4"X4'-0"	2'-5"X4'-1"	6
W02	3'-5"X4'-6"	3'-6"X4-7"	9
W03	3'-0"X4'-0"	3'-1"X4'-1"	5
W04	4'-0"X5'-0"	4'-1"X5'-1"	3
W05	2'-4"X6'-0"	2'-5"X6'-1"	8
W06	8'-4"X6'-0"	8'-5"X6'-1"	1
W07	3'-5"X6'-0"	3'-6"X6'-1"	3
W08	3'-0"X6'-0"	3'-1"X6'-1"	6
W09	3'-10"X6'-0"	3'-11"X6'-1"	1
W10	4'-0"X6'-0"	4'-1"X6'-1"	2
W11	8'-0"X6'-0"	8'-1"X6'-1"	1
W12	5'-3"X6'-0"	5'-4"X6'-1"	1

STRUCTURAL LEGEND	
C1	3.5" x 3.5" H.S.S. COLUMNS
C2	5 1/4" x 5 1/4" PARALLAM PSL
B1	W12x26 STEEL BEAM
B2	3 1/2" x 14" 1.55E TIMBERSTRAND LSL BEAMS

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

Rev.	YY/MM/DD	Revision
1	24/04/16	FINAL SUBMISSION

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
DOOR, WINDOW AND
STRUCTURAL SCHEDULES

Group Number:
ARC8403-010

Project North:


Drawn By:
STEVEN ESTAFANOS

Date:
2024/04/16

Scale:
N/A

Project No.:
2024-01

Drawing No.:
A1.1

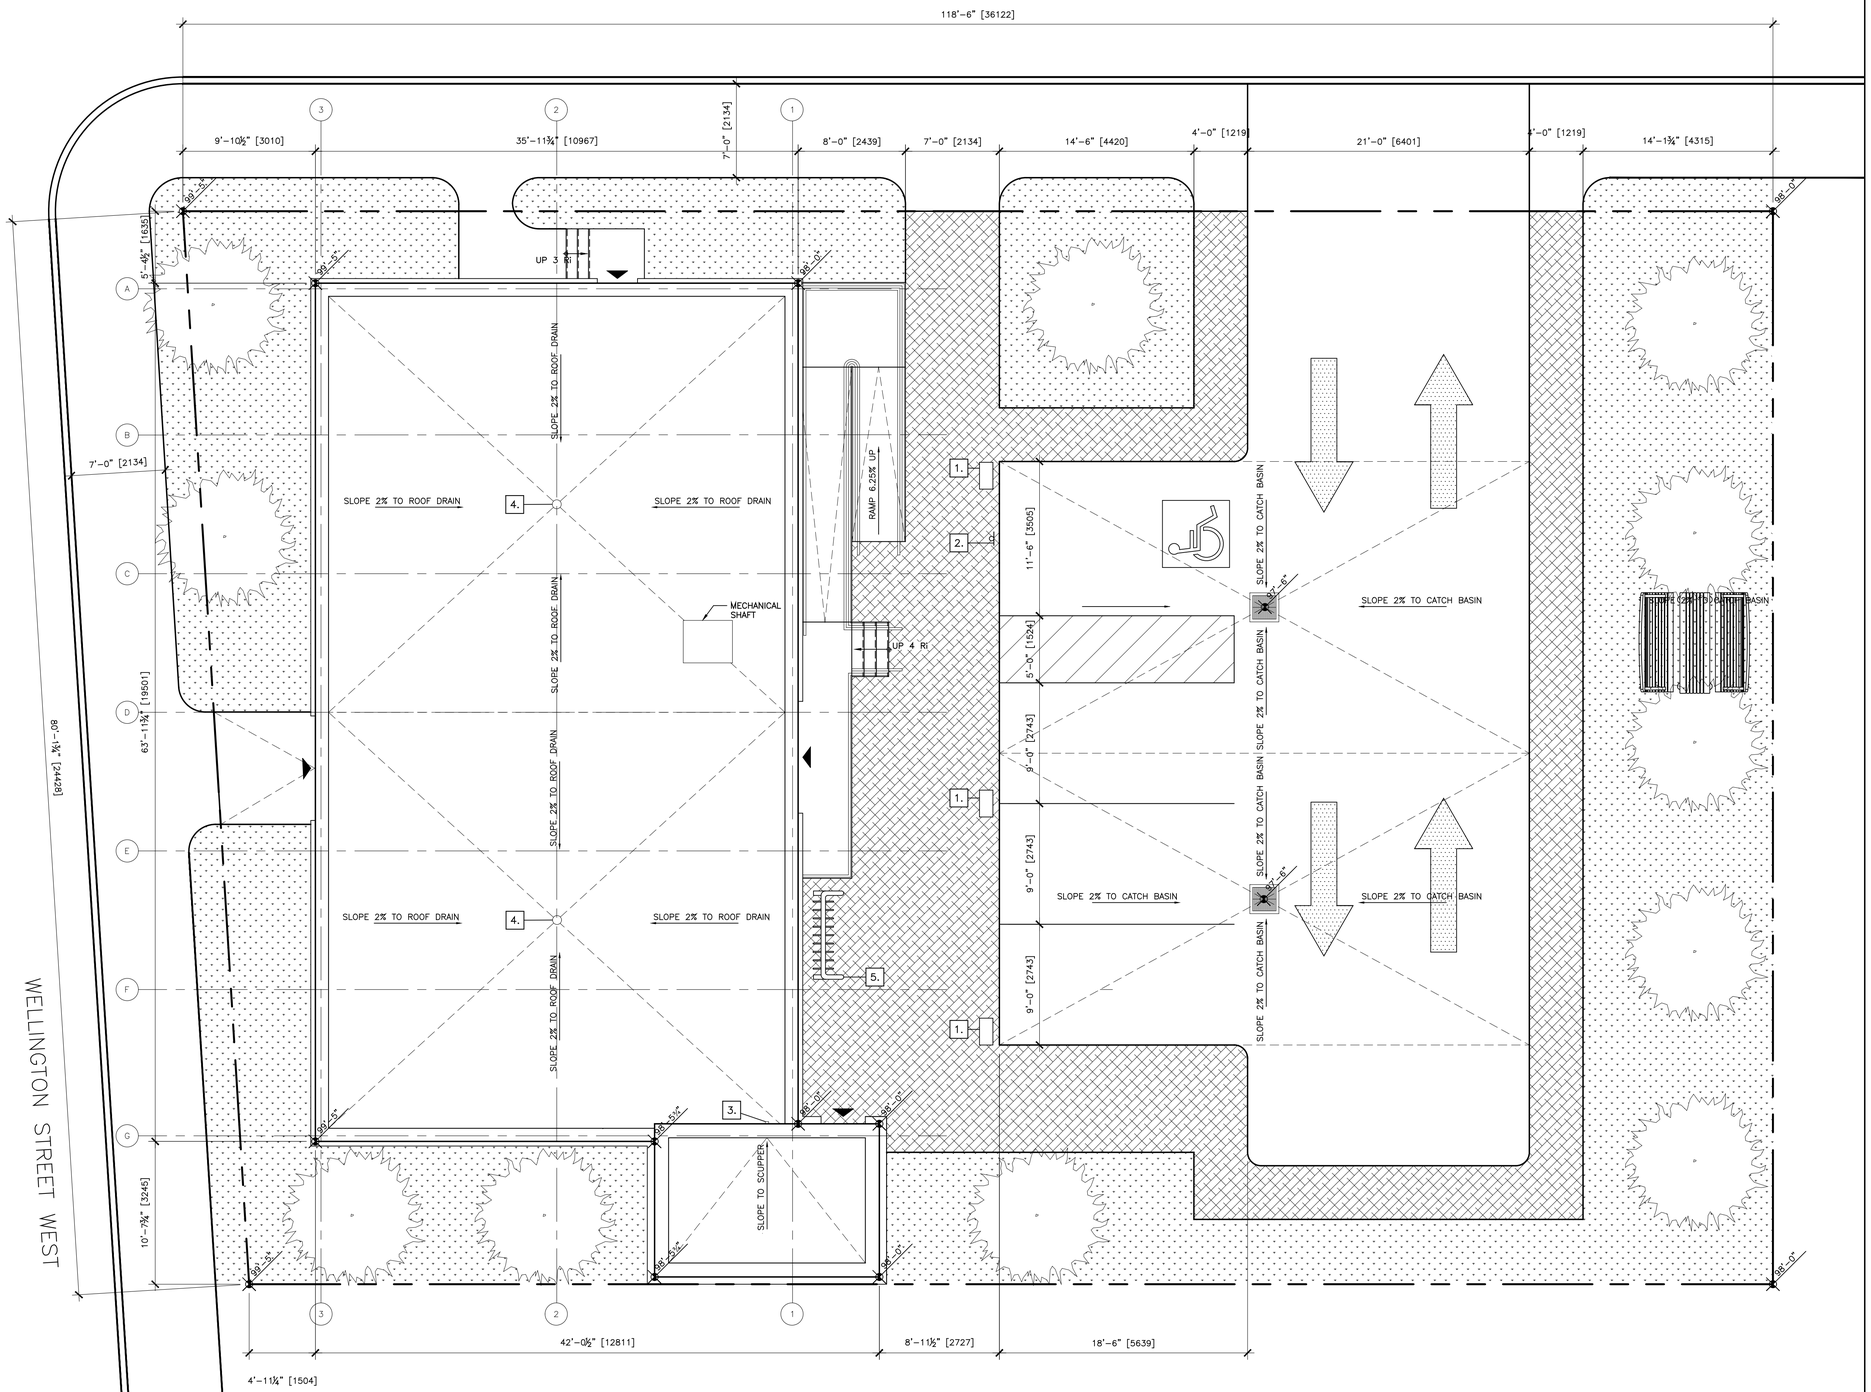

DRAWING NOTES:

1. ELECTRIC VEHICLE CHARGING STATION
2. DISABLED PARKING SIGN
3. ROOF SCUPPER
4. ROOF DRAIN
5. BIKE RACK

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

Legend:

- Sod
- Interlock

Rev.	YY/MM/DD	Revision
2	24/04/16	FINAL SUBMISSION
1	24/02/13	ASSIGNMENT SUBMISSION

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
SITE PLAN

Group Number:
ARC8403-010

Project North:


Drawn By:
STEVEN ESTAFANOS

Date:
2024/02/13

Scale:
$\frac{3}{16}$"=1'-0"

Project No.:
2024-01

Drawing No.:
A2.0

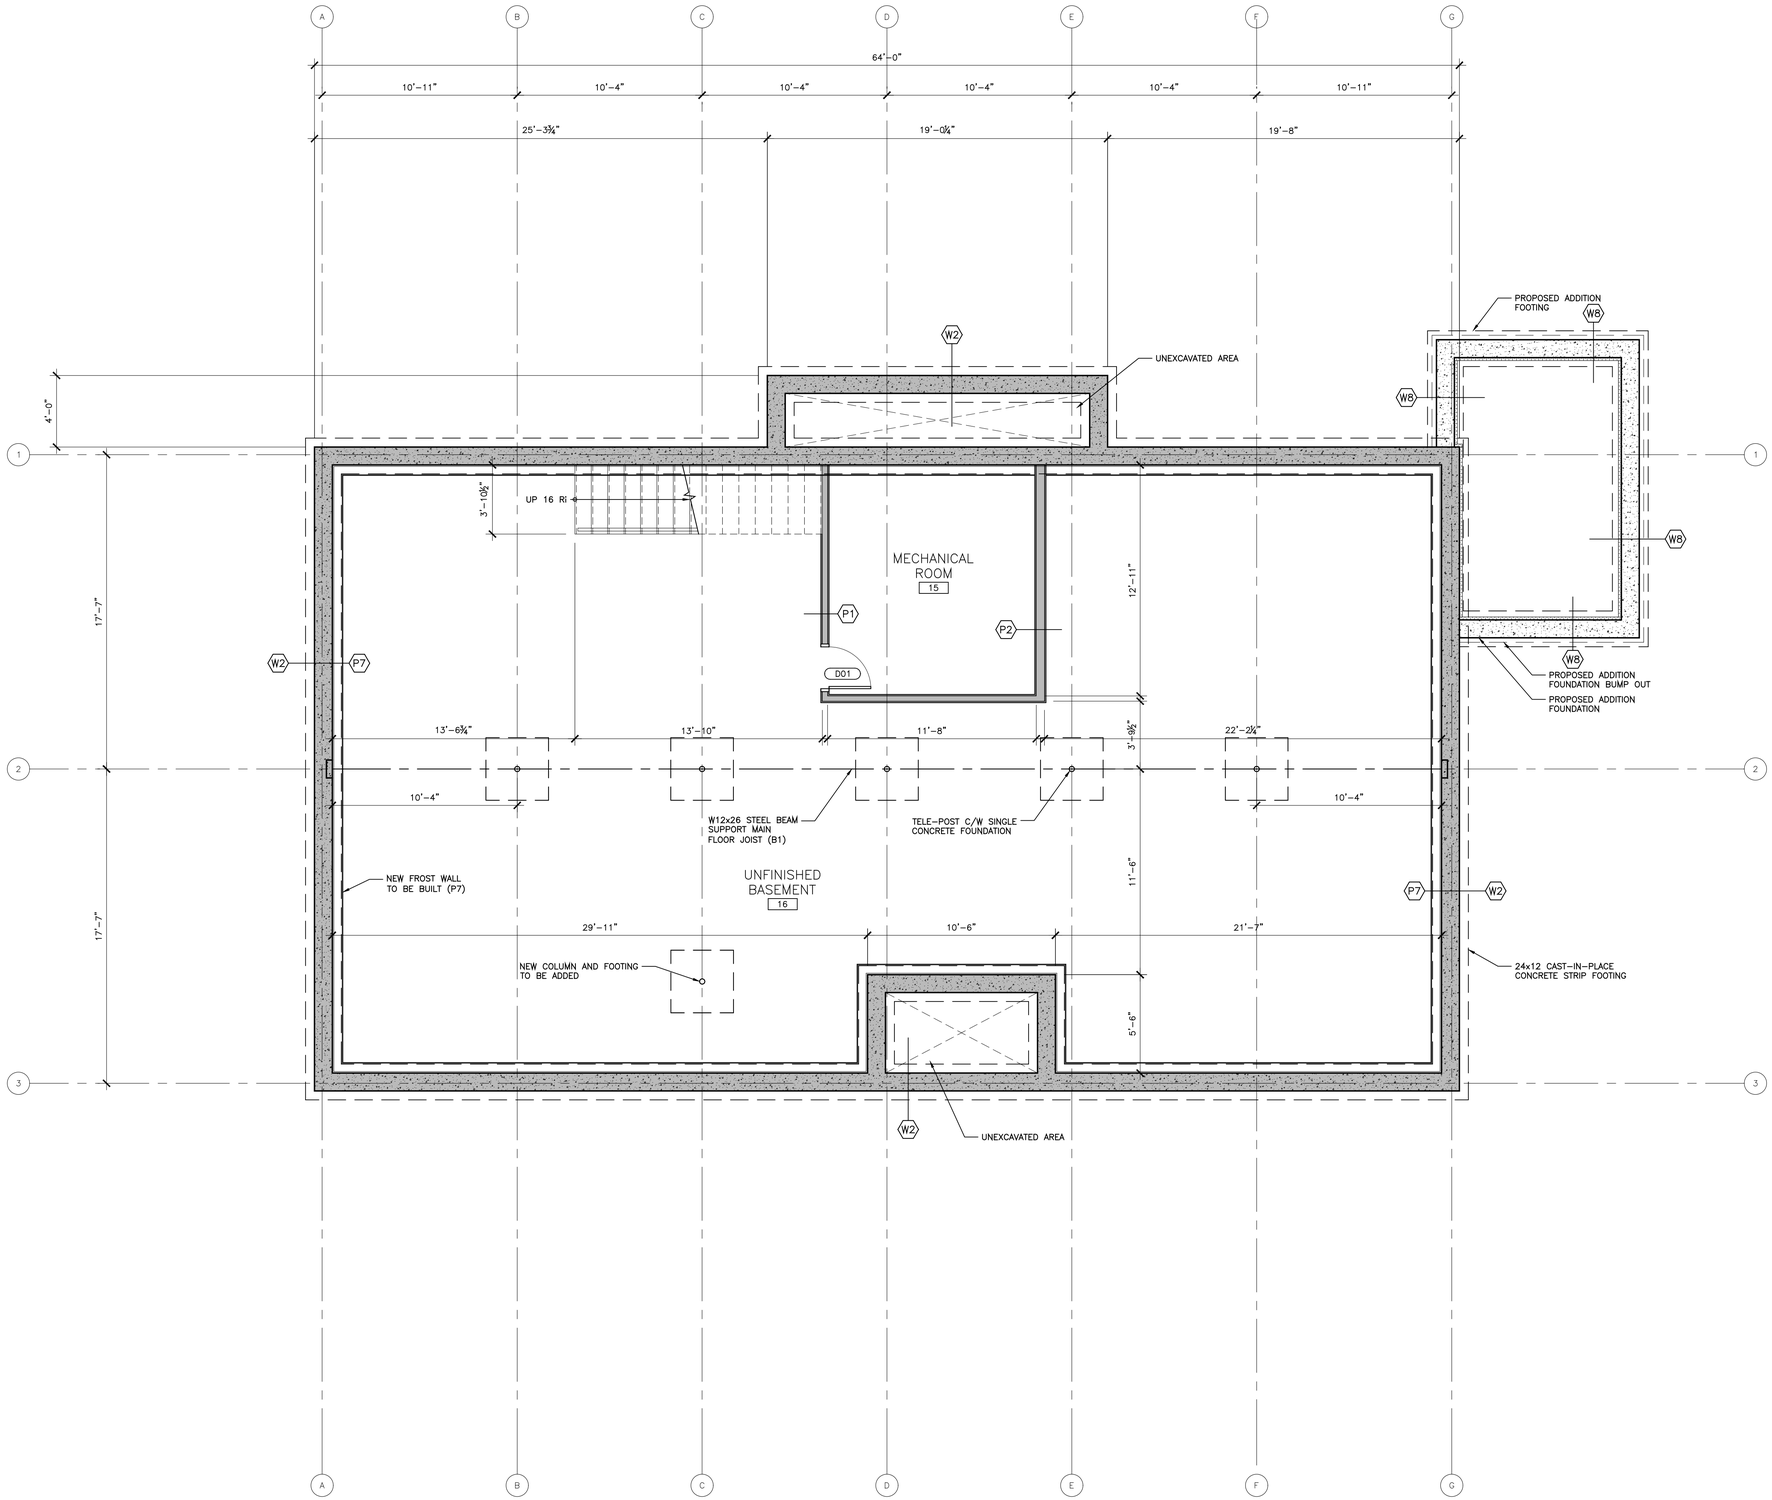

DRAWING NOTES:

1.

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

Rev.	YY/MM/DD	Revision
2	24/04/16	FINAL SUBMISSION
1	24/01/23	ASSIGNMENT SUBMISSION

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
AS FOUND BASEMENT
PLAN AND ADDITIONS

Group Number:
ARC8403-010

Project North:


Drawn By:
STEVEN ESTAFANOS

Date:
2024/01/23

Scale:
1/4"=1'-0"

Project No.:
2024-01

Drawing No.:
AF1.0

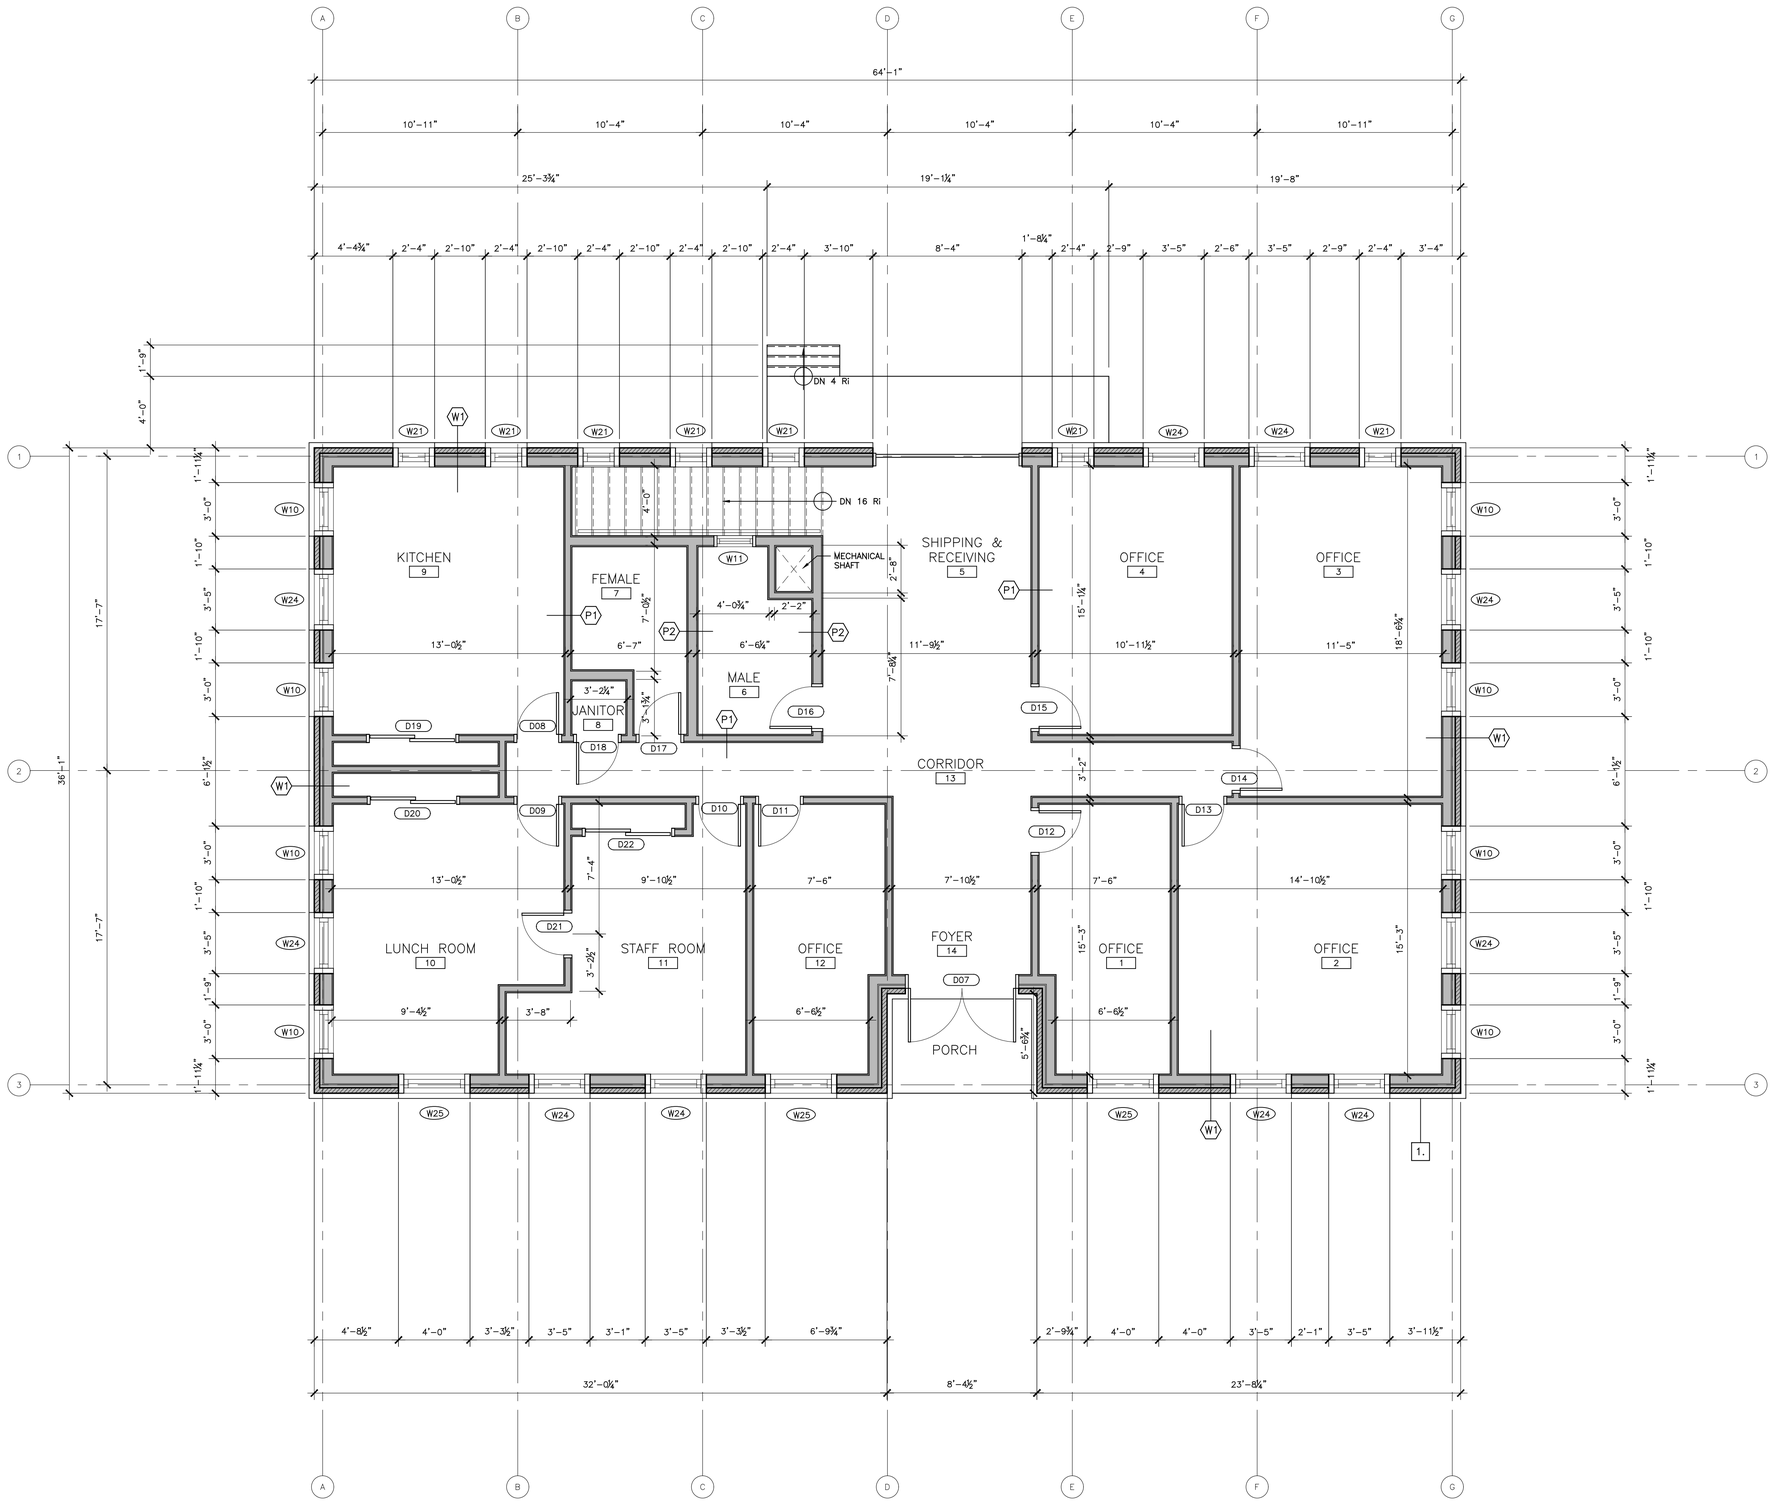

DRAWING NOTES:

1. WRAPAROUND SILL AT BRICK TYPE TRANSITION AND ALL DOOR AND WINDOW SILLS: TYPE A – S/399

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

Rev.	YY/MM/DD	Revision
2	24/04/16	FINAL SUBMISSION
1	24/01/23	ASSIGNMENT SUBMISSION

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
AS FOUND
GROUND FLOOR PLAN

Group Number:
ARC8403-010

Project North:


Drawn By:
STEVEN ESTAFANOS

Date:
2024/01/23

Scale:
¼"=1'-0"


Project No.:
2024-01

Drawing No.:
AF2.0

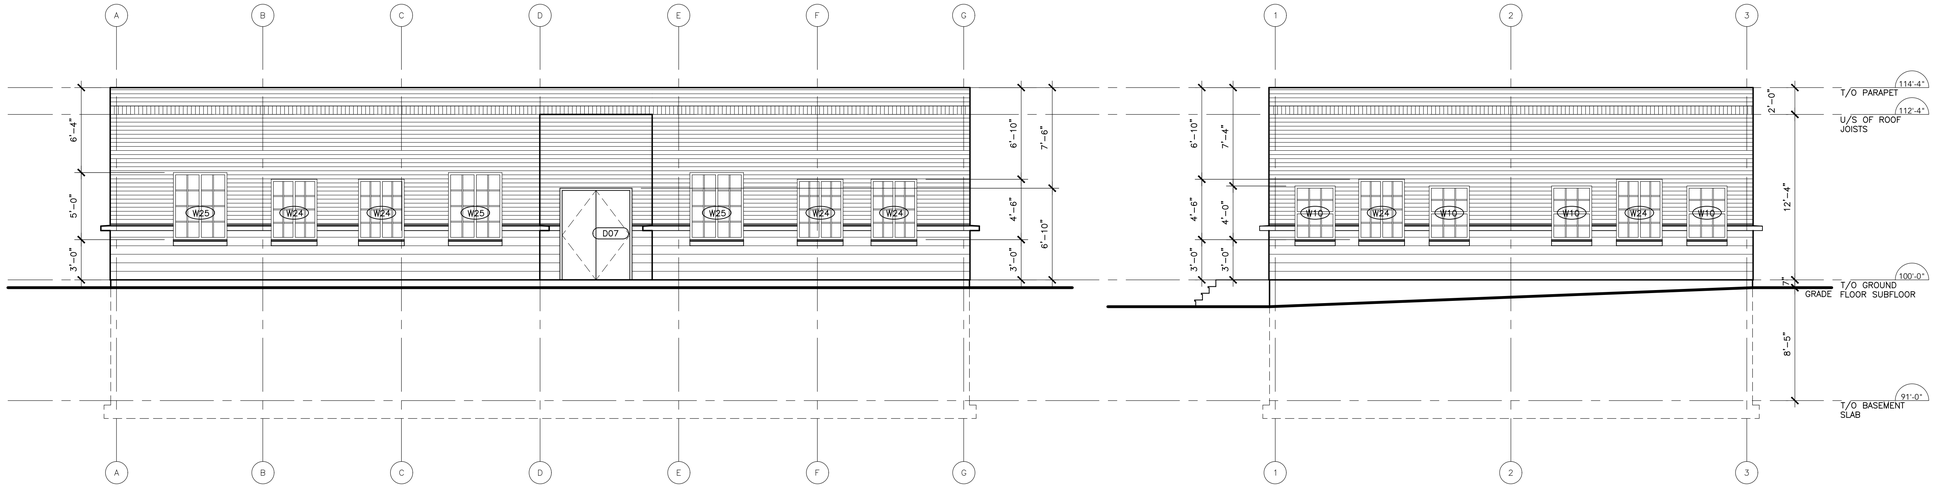


1 SOUTH ELEVATION
AF3.0 SCALE: 3/16" = 1'-0"

2 WEST ELEVATION
AF3.0 SCALE: 3/16" = 1'-0"

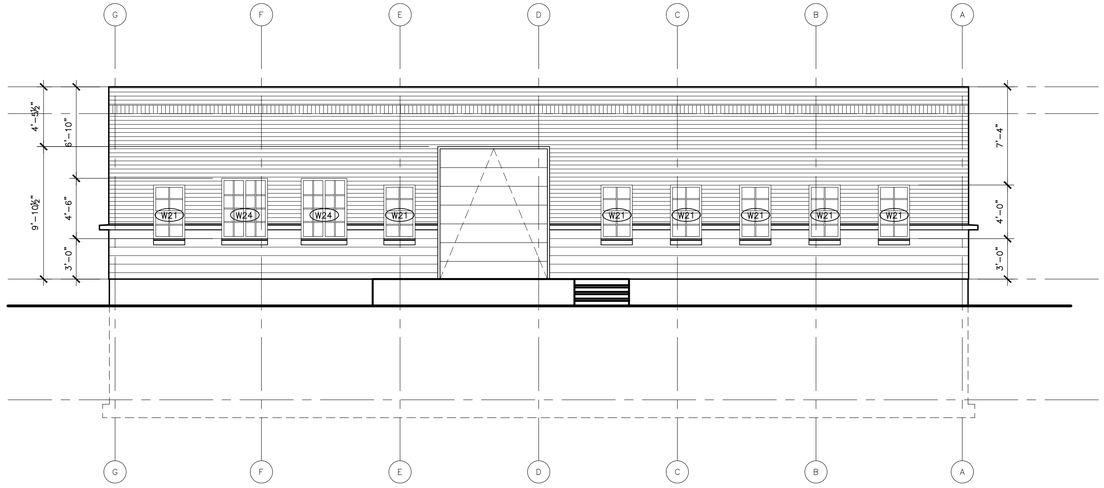

3 NORTH ELEVATION
AF3.0 SCALE: 3/16" = 1'-0"

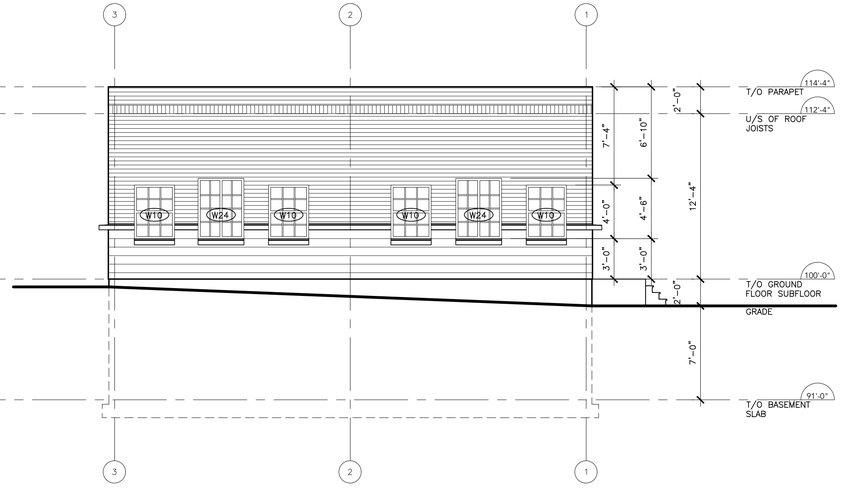

4 EAST ELEVATION
AF3.0 SCALE: 3/16" = 1'-0"

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

Rev.	YY/MM/DD	Revision
2	24/04/16	FINAL SUBMISSION
1	24/01/23	ASSIGNMENT SUBMISSION

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
AS FOUND
ELEVATIONS

Group Number:
ARC8403-010


Drawn By:
STEVEN ESTAFANOS

Date:
2024/01/23

Scale:
$\frac{3}{16}$"=1'-0"

Project No.:
2024-01

Drawing No.:
AF3.0

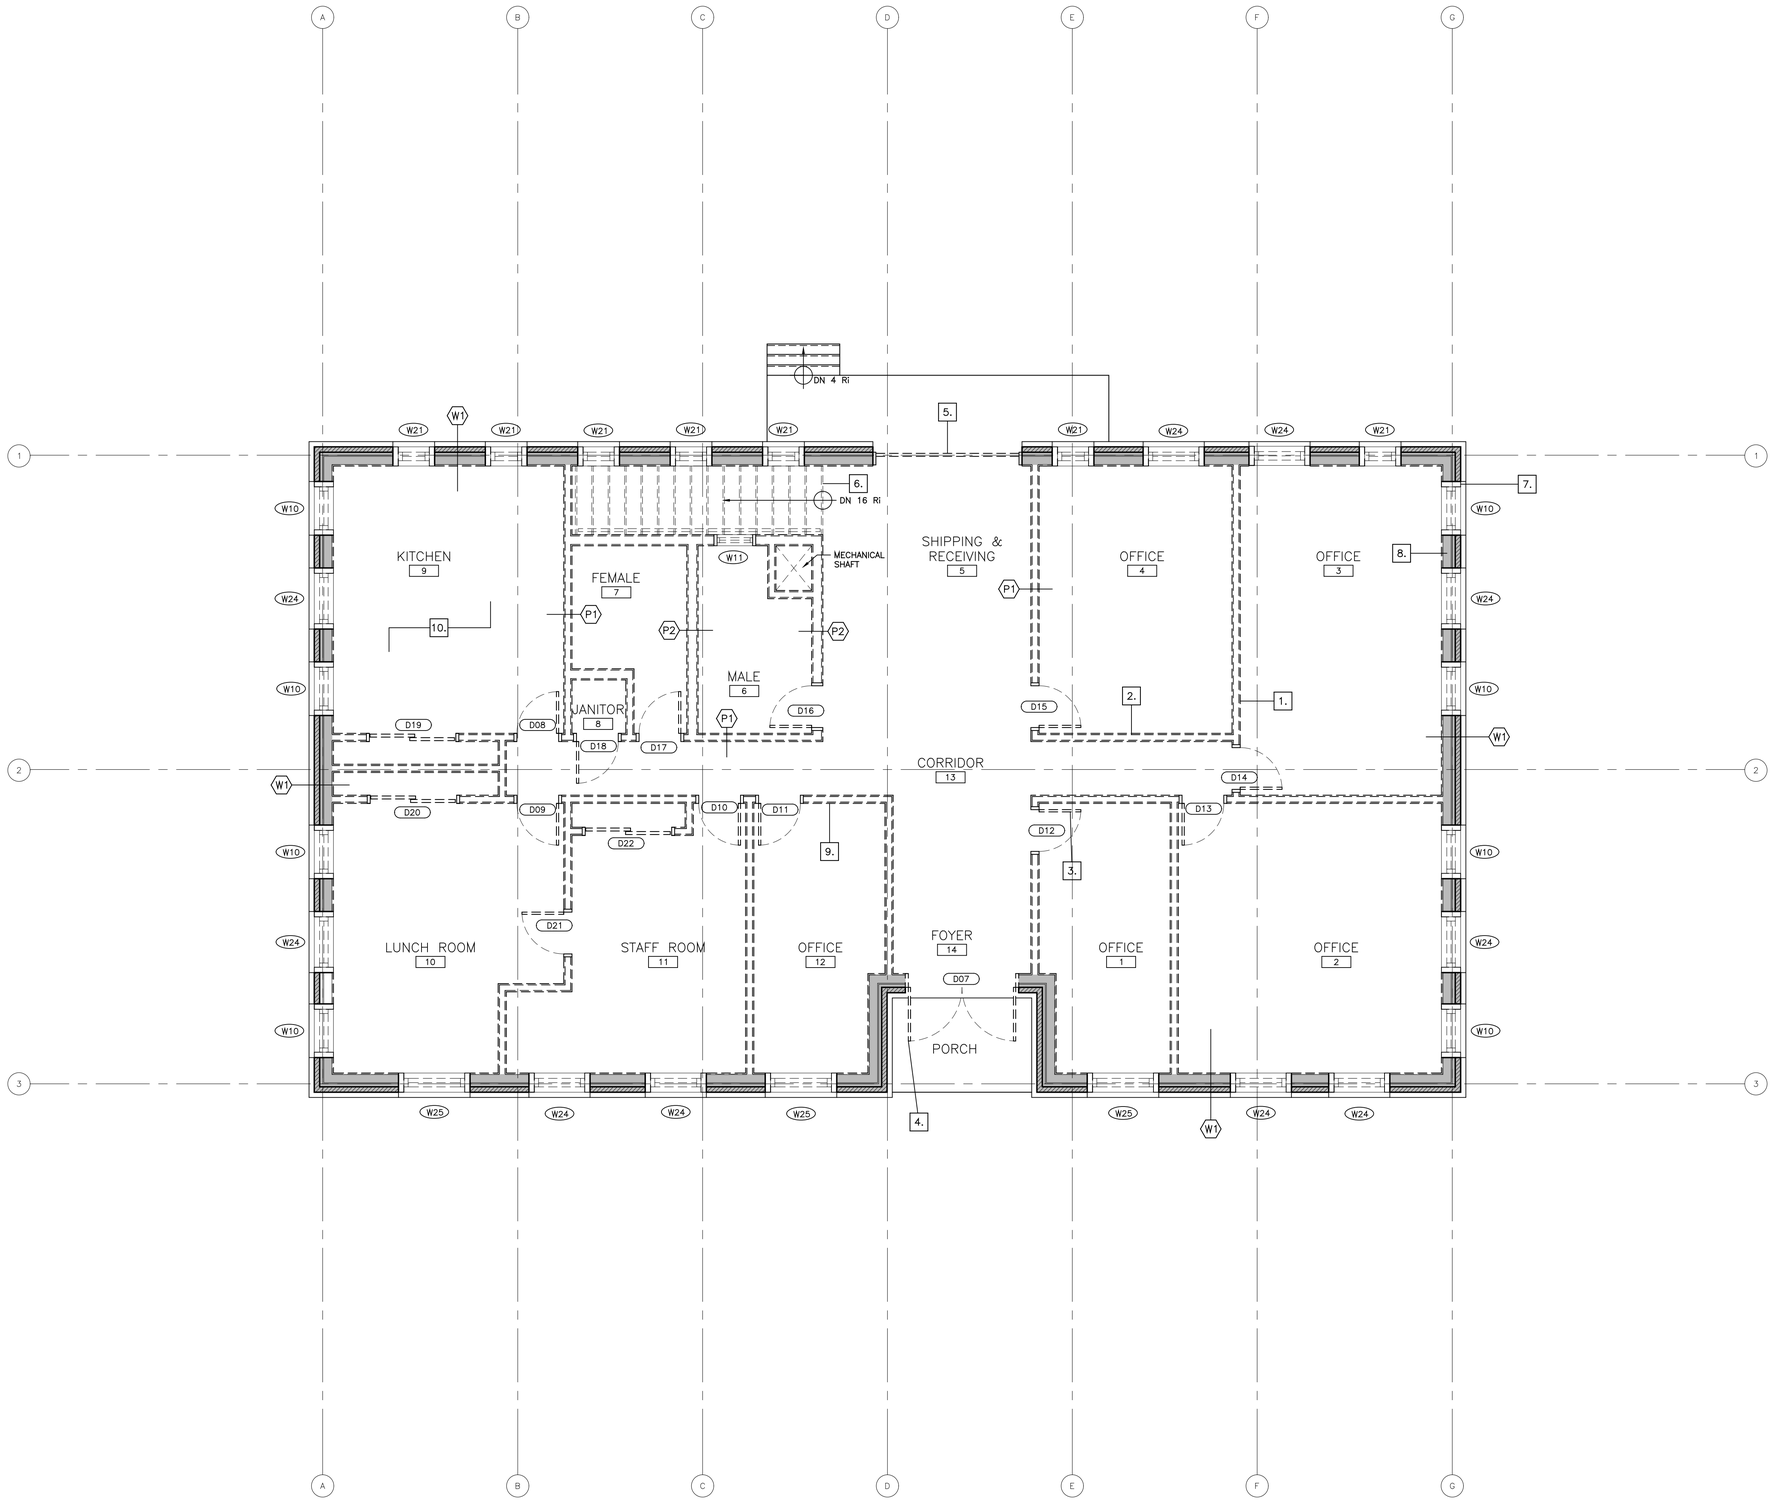

DRAWING NOTES:

1. ALL EXISTING INTERIOR WALLS TO BE REMOVED.
2. WOOD STUDS TO BE REUSED/RECYCLED.
3. EXISTING DOORS AND HARDWARE TO BE REMOVED AND RETURNED TO THE CLIENT.
4. EXISTING ENTRANCE DOORS AND HARDWARE TO BE REMOVED AND RETURNED TO THE CLIENT.
5. EXISTING GARAGE DOOR AND HARDWARE TO BE REMOVED.
6. EXISTING STAIR TO BE REMOVED.
7. EXISTING WINDOWS TO BE REMOVED AND RETURNED TO THE CLIENT.
8. EXISTING VERMICULITE INSULATION TO BE REMOVED.
9. EXISTING 1/4" WOOD LATH AND 3/4" PLASTER TO BE REMOVED.
10. EXISTING 9" X9" VINYL TILE FLOORING TO BE REMOVED.

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

Rev.	YY/MM/DD	Revision
2	24/04/16	FINAL SUBMISSION
1	24/01/23	ASSIGNMENT SUBMISSION

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
DEMOLITION PLAN

Group Number:
ARC8403-010

Project North:


Drawn By: STEVEN ESTAFANOS

Date: 2024/01/23

Scale: $\frac{1}{4}$"=1'-0"

Project No.: 2024-01

Drawing No.: D1.0

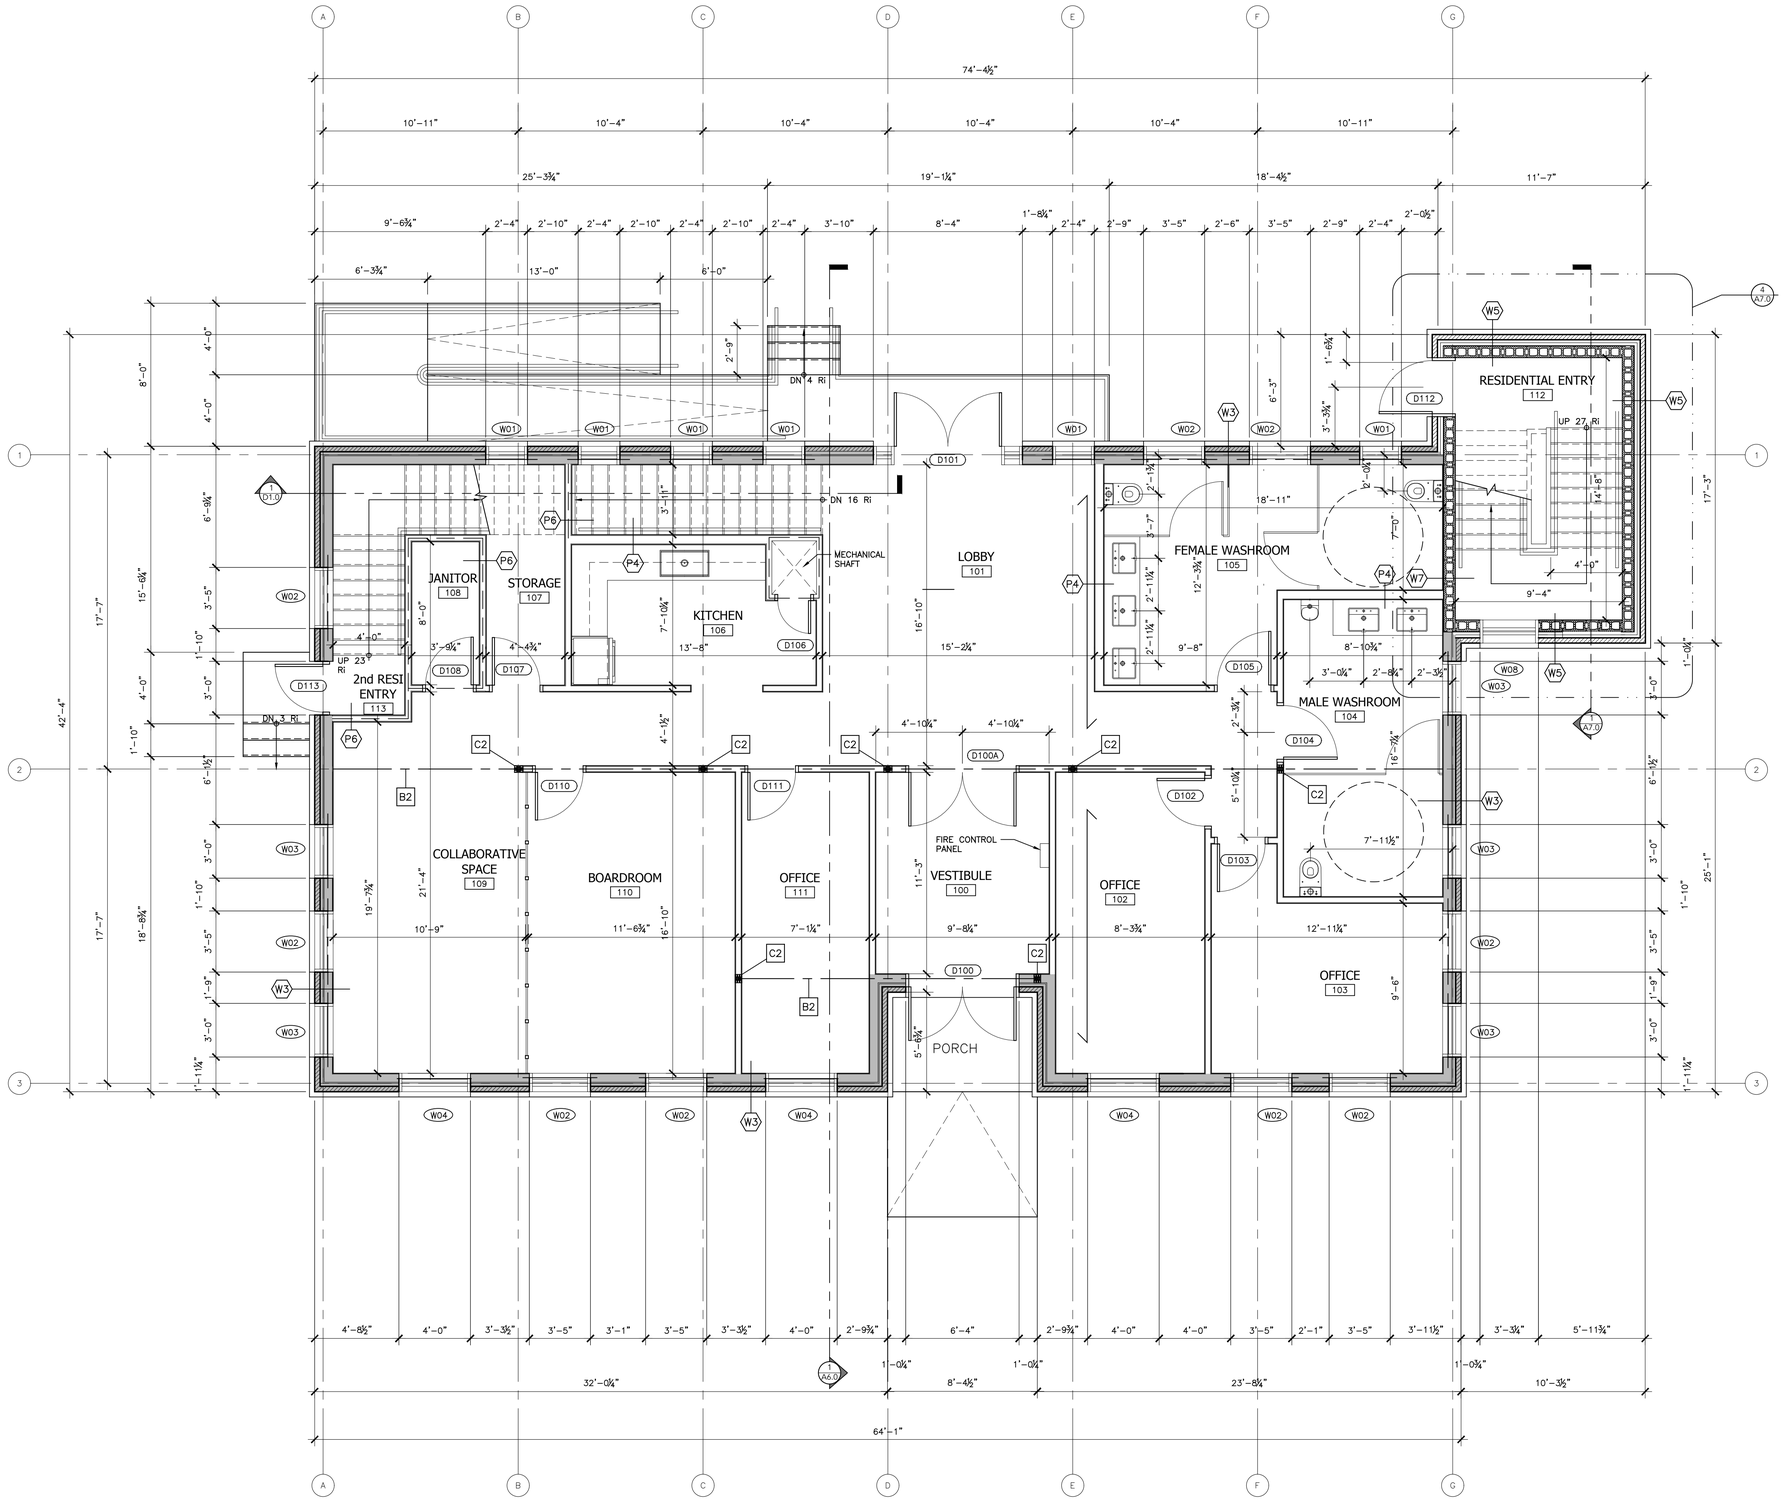

DRAWING NOTES:

1. WRAPAROUND SILL AT BRICK TYPE TRANSITION AND ALL DOOR AND WINDOW SILLS: TYPE A – S/399
2. UNLESS OTHERWISE NOTED, ALL INTERIOR PARTITION WALLS ARE P3

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

1	24/02/13	ASSIGNMENT SUBMISSION
Rev.	YY/MM/DD	Revision

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
GROUND FLOOR PLAN

Group Number:
ARC8403-010

Project North:

Drawn By:
STEVEN ESTAFANOS

Date:
2024/02/13


Scale:
1/4"=1'-0"

Project No.:
2024-01

Drawing No.:
A3.0

DRAWING NOTES:

1. UNLESS OTHERWISE NOTED, ALL INTERIOR PARTITION WALLS ARE P3

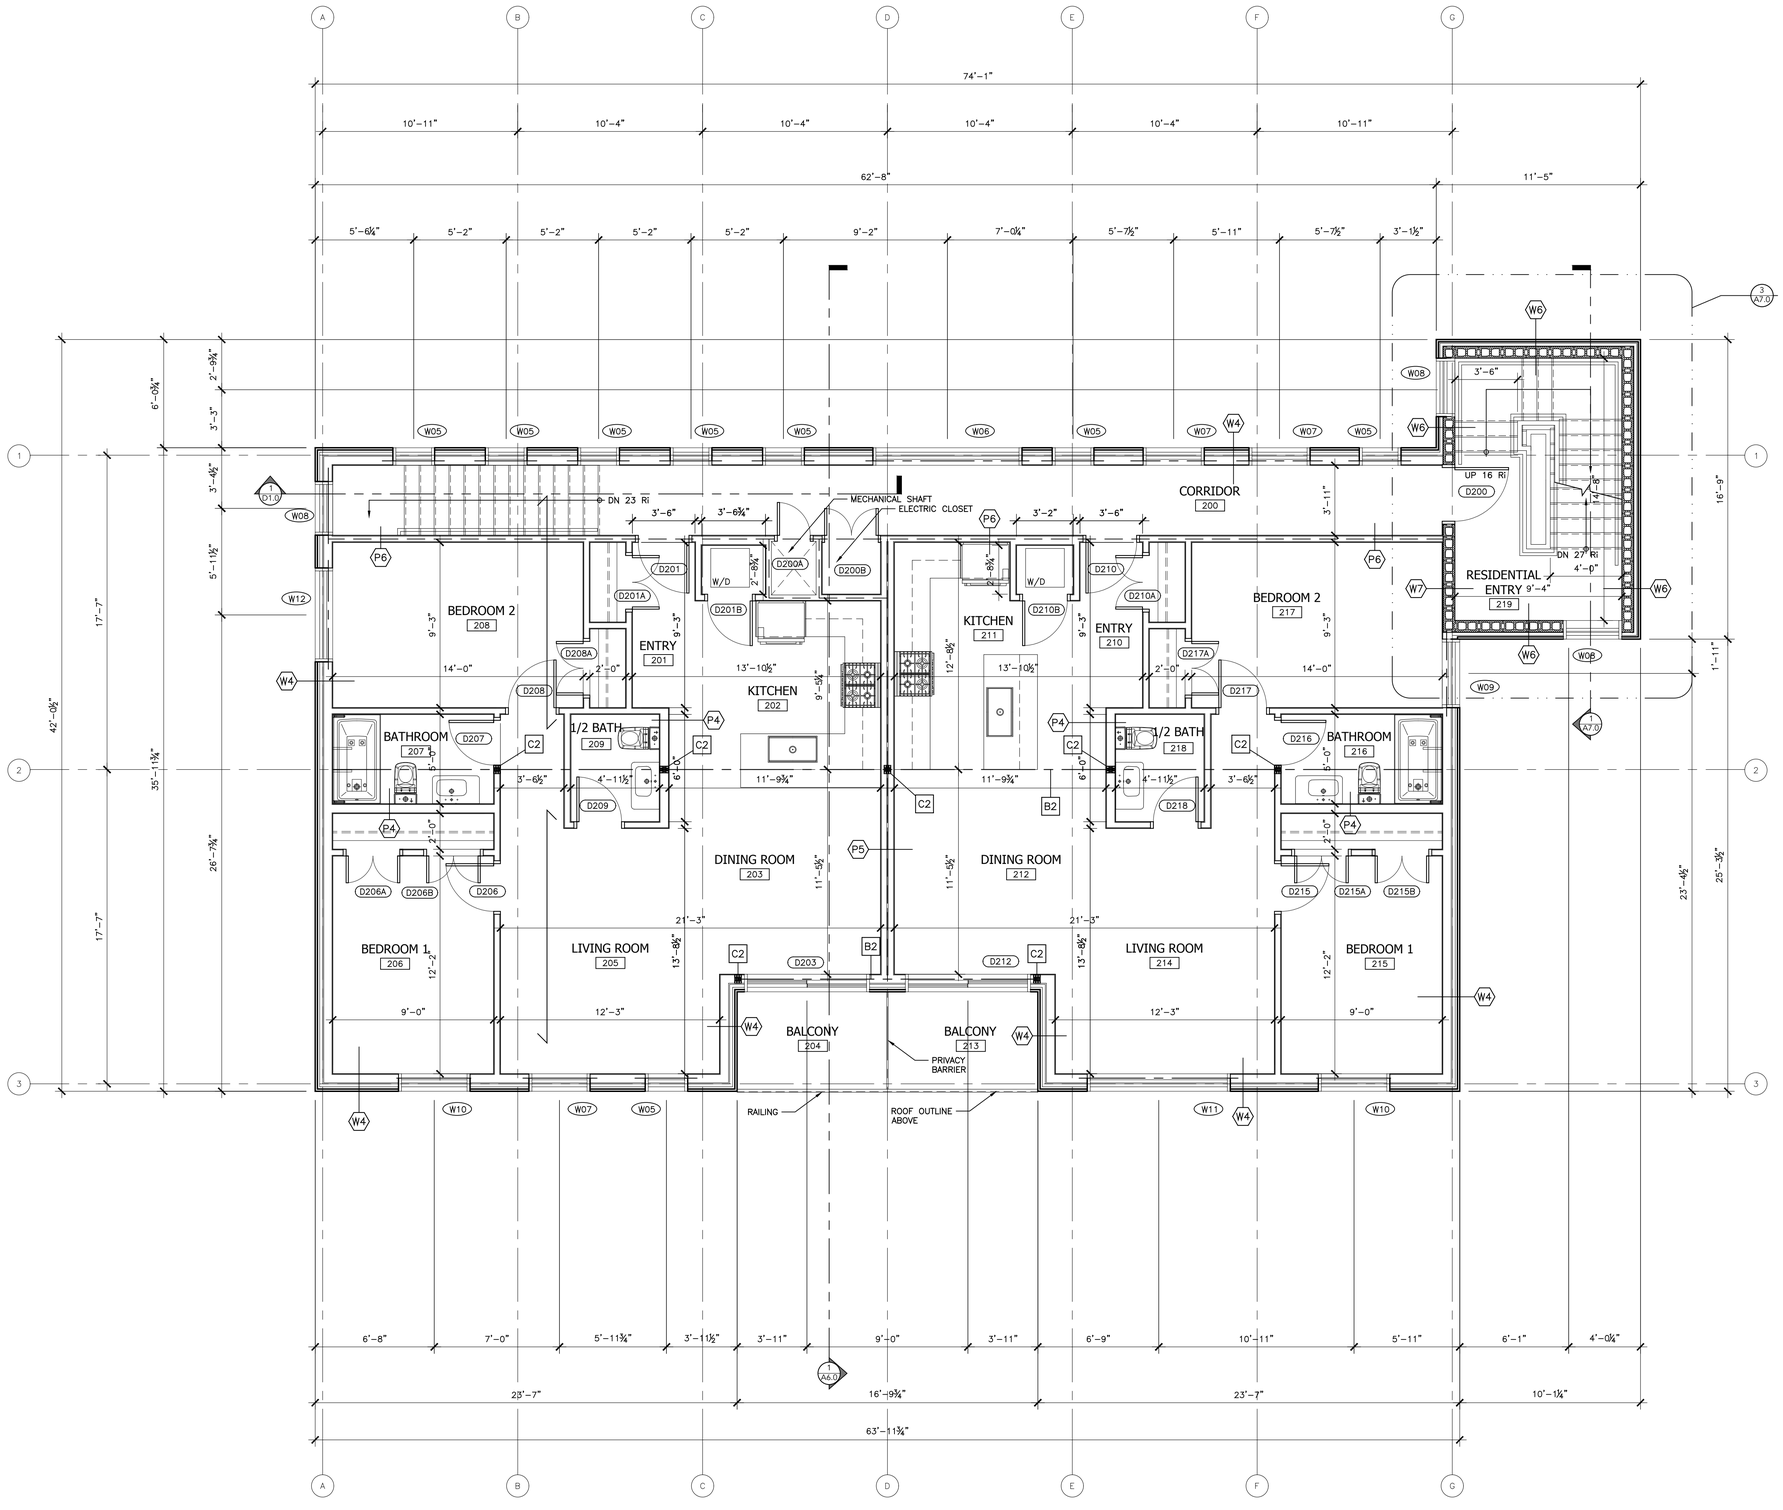

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

ALGONQUIN COLLEGE

ESTAFANOS

1	24/02/13	ASSIGNMENT SUBMISSION
Rev.	YY/MM/DD	Revision

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
SECOND FLOOR PLAN

Group Number:
ARC8403-010

Project North:


Drawn By:
STEVEN ESTAFANOS

Date:
2024/02/13

Scale:
1/4"=1'-0"


Project No.:
2024-01

Drawing No.:
A4.0

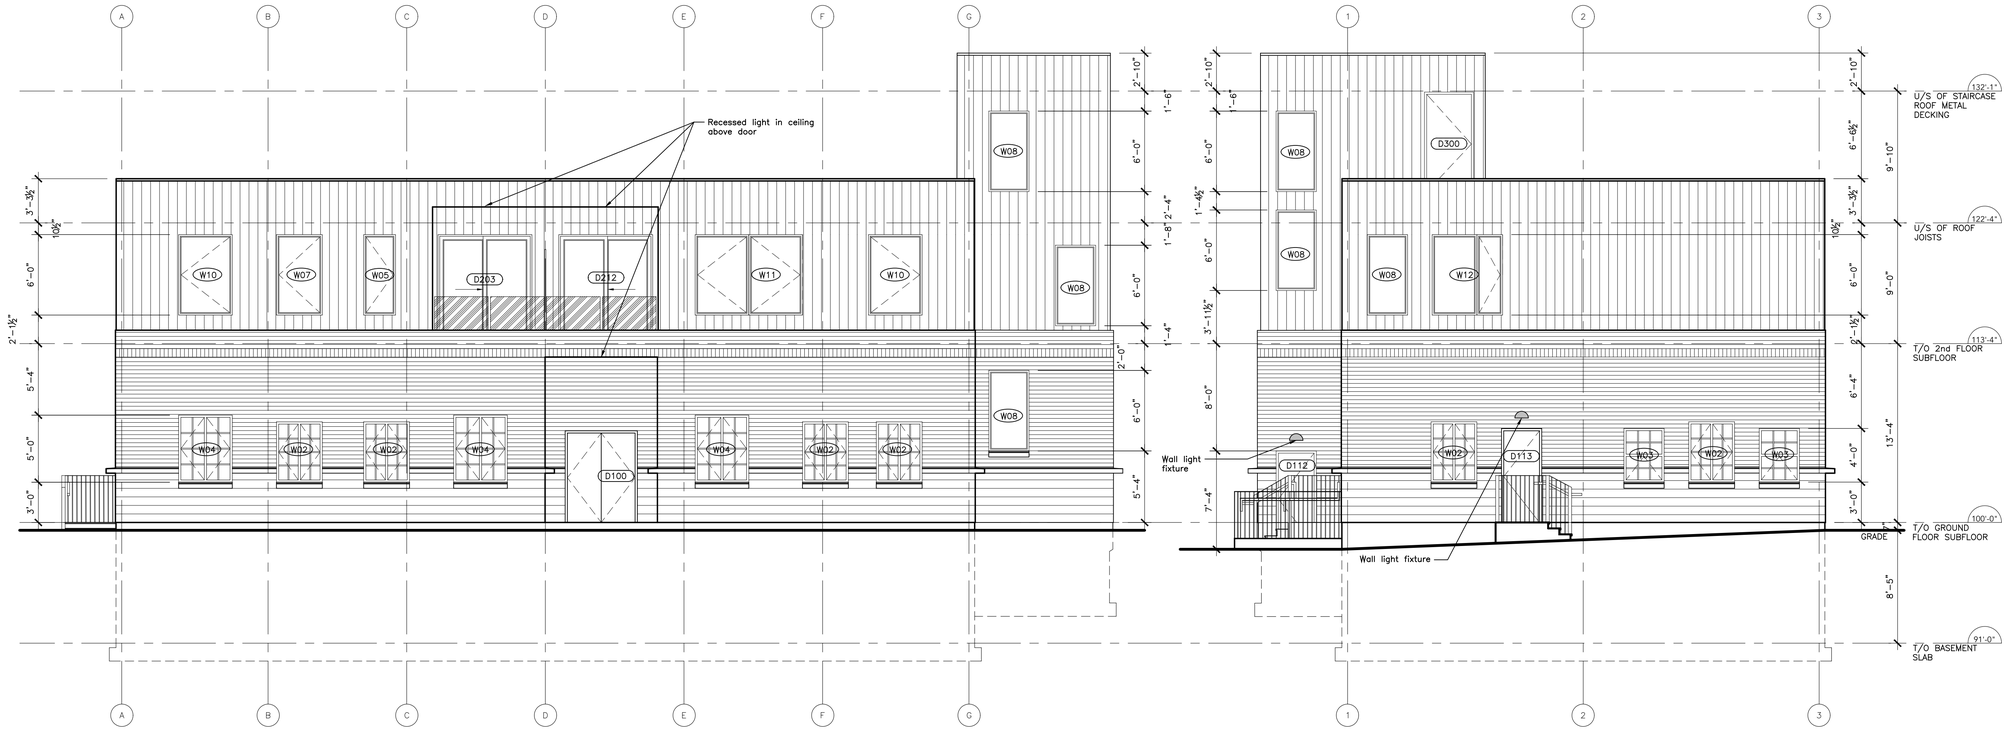

1 A5.0 SOUTH ELEVATION
SCALE: 3/16" = 1'-0"

2 A5.0 WEST ELEVATION
SCALE: 3/16" = 1'-0"

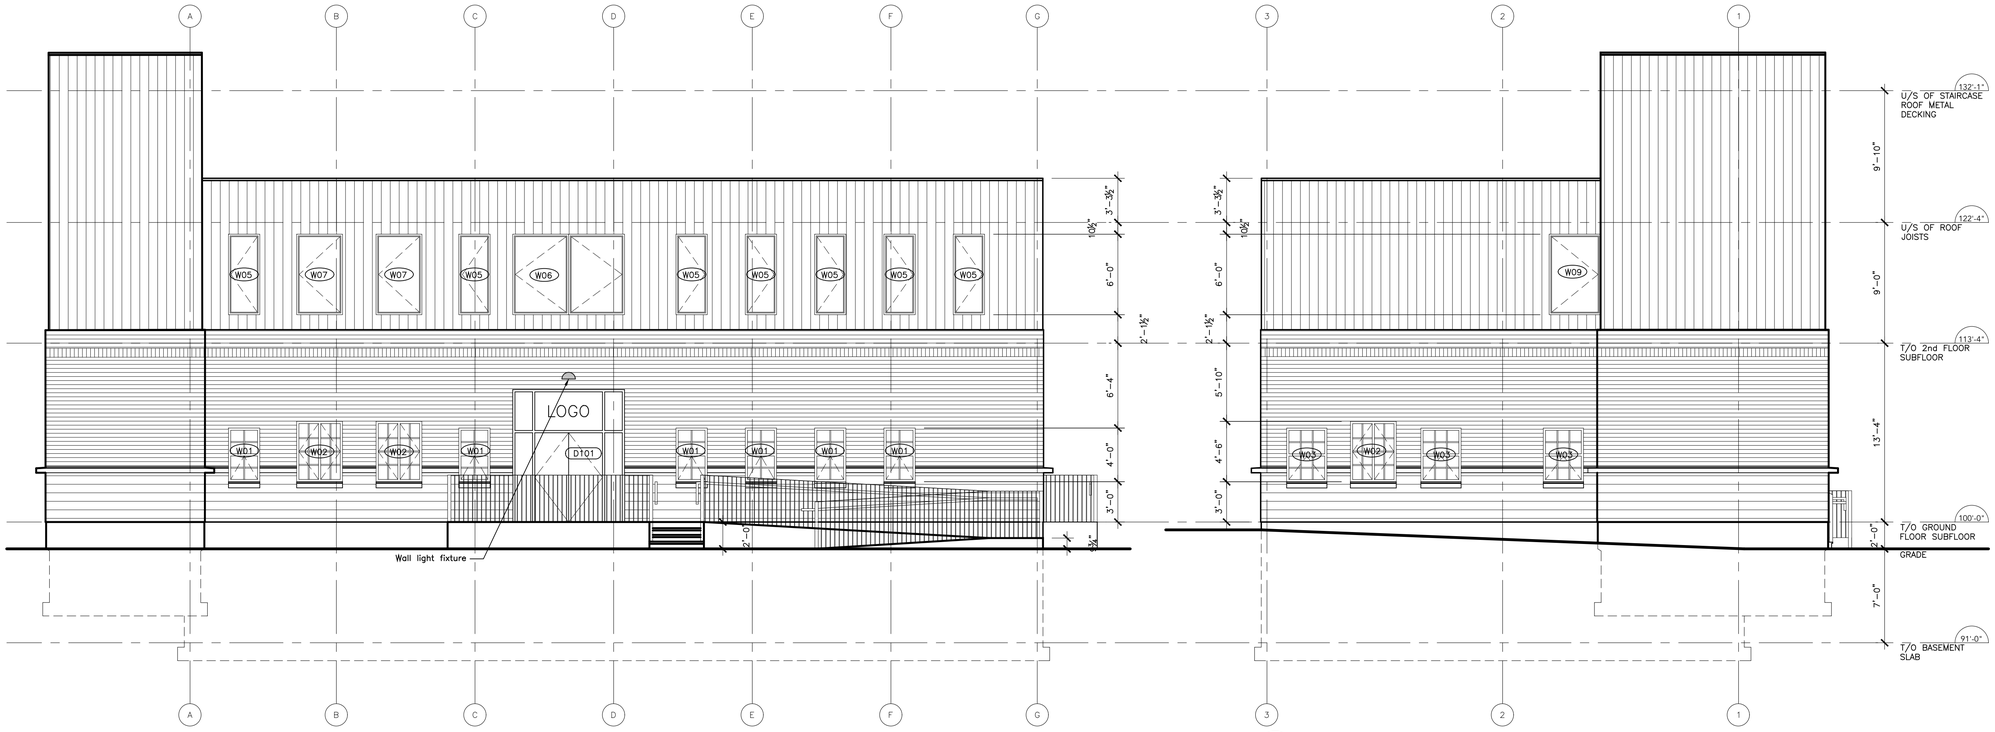

3 A5.0 NORTH ELEVATION
SCALE: 3/16" = 1'-0"

4 A5.0 EAST ELEVATION
SCALE: 3/16" = 1'-0"

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

Rev.	YY/MM/DD	Revision
2	24/04/16	FINAL SUBMISSION
1	24/04/09	ASSIGNMENT SUBMISSION

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
PROPOSED ELEVATIONS

Group Number:
ARC8403-010

Project North:


Drawn By:
STEVEN ESTAFANOS

Date:
2024/04/09


Scale:
3/16"=1'-0"


Project No.:
2024-01

Drawing No.:
A5.0

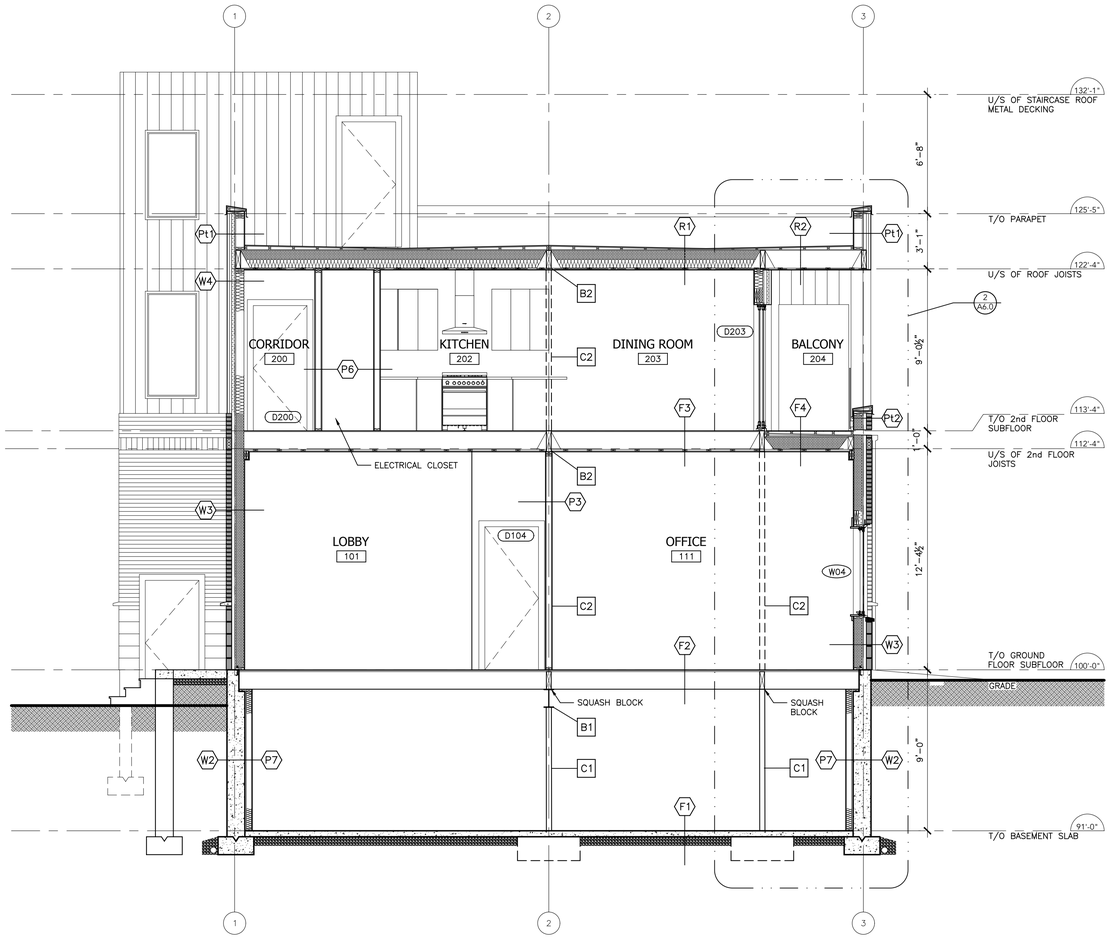


1 A6.0 BUILDING SECTION
SCALE: ¼" = 1'-0"

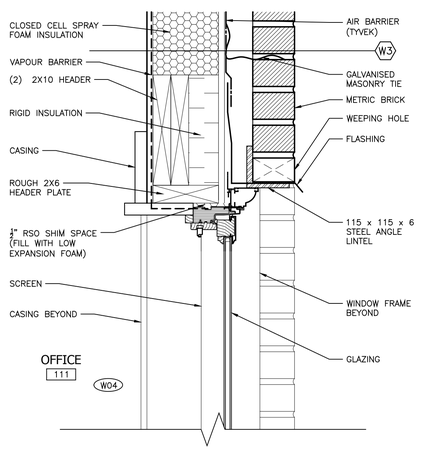


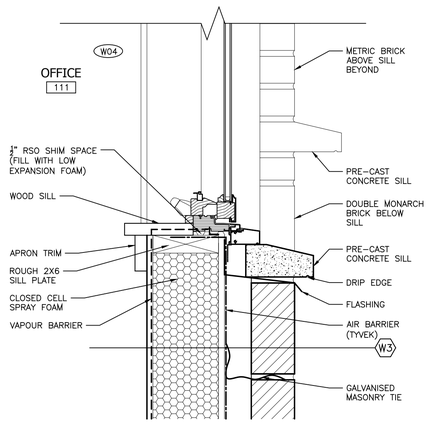


3 A6.0 WINDOW HEAD AND SILL AT MASONRY VENEER
SCALE: 2" = 1'-0"

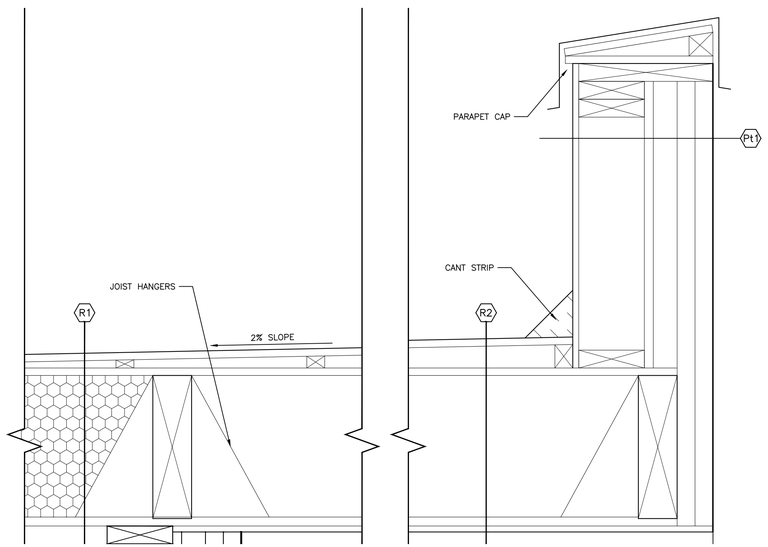

4 A6.0 PARAPET DETAIL
SCALE: 2" = 1'-0"

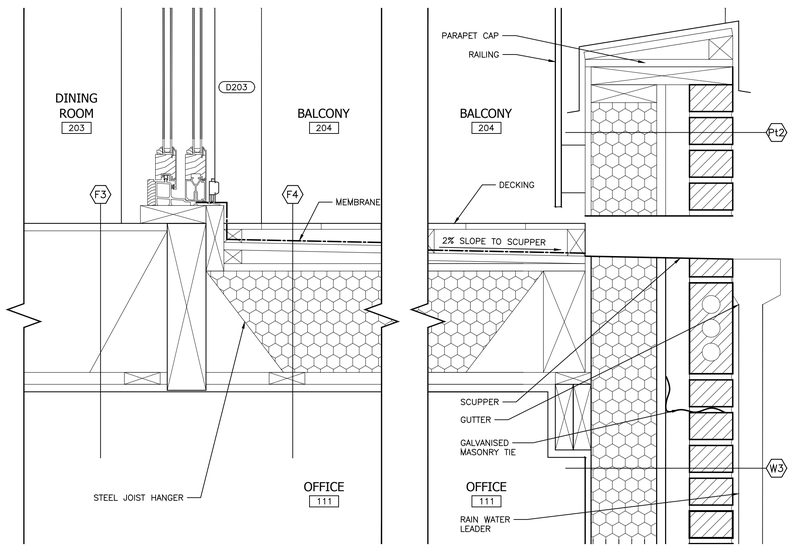

5 A6.0 BALCONY DETAIL
SCALE: 2" = 1'-0"

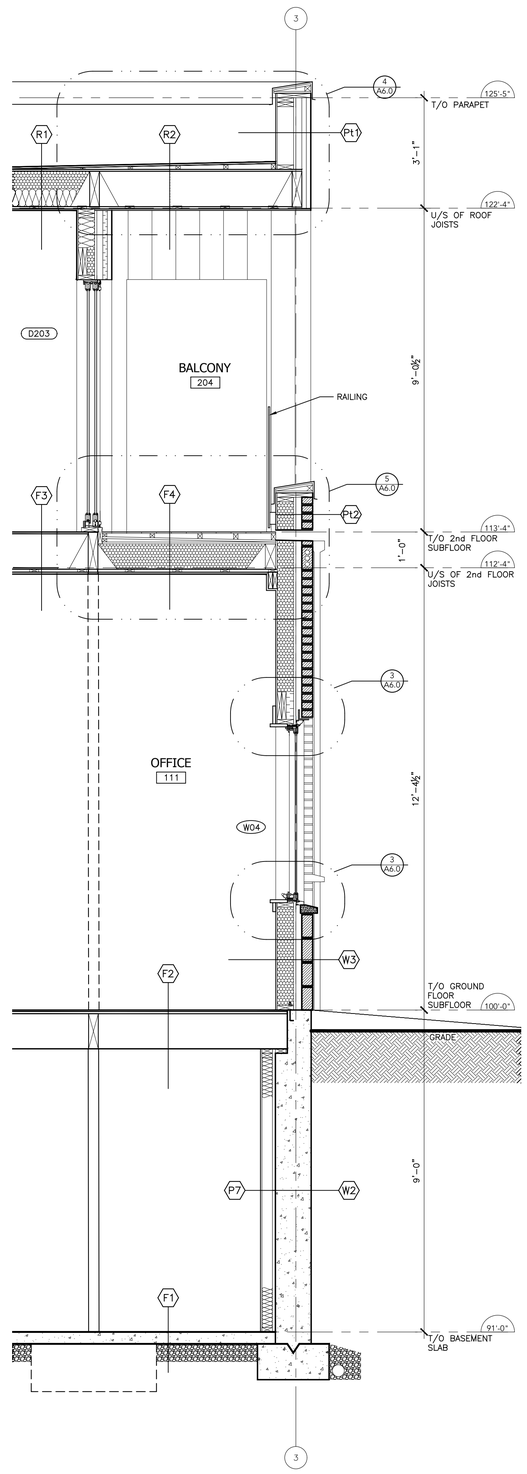

2 A6.0 WALL SECTION
SCALE: ½" = 1'-0"

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

Rev.	YY/MM/DD	Revision
2	24/04/16	FINAL SUBMISSION
1	24/03/12	ASSIGNMENT SUBMISSION

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
BUILDING SECTION,
WALL SECTION,
DETAILS

Group Number:
ARC8403-010

Project North:


Drawn By:
STEVEN ESTAFANOS

Date:
2024/03/12


Scale:
AS NOTED

Project No.:
2024-01


Drawing No.:
A6.0

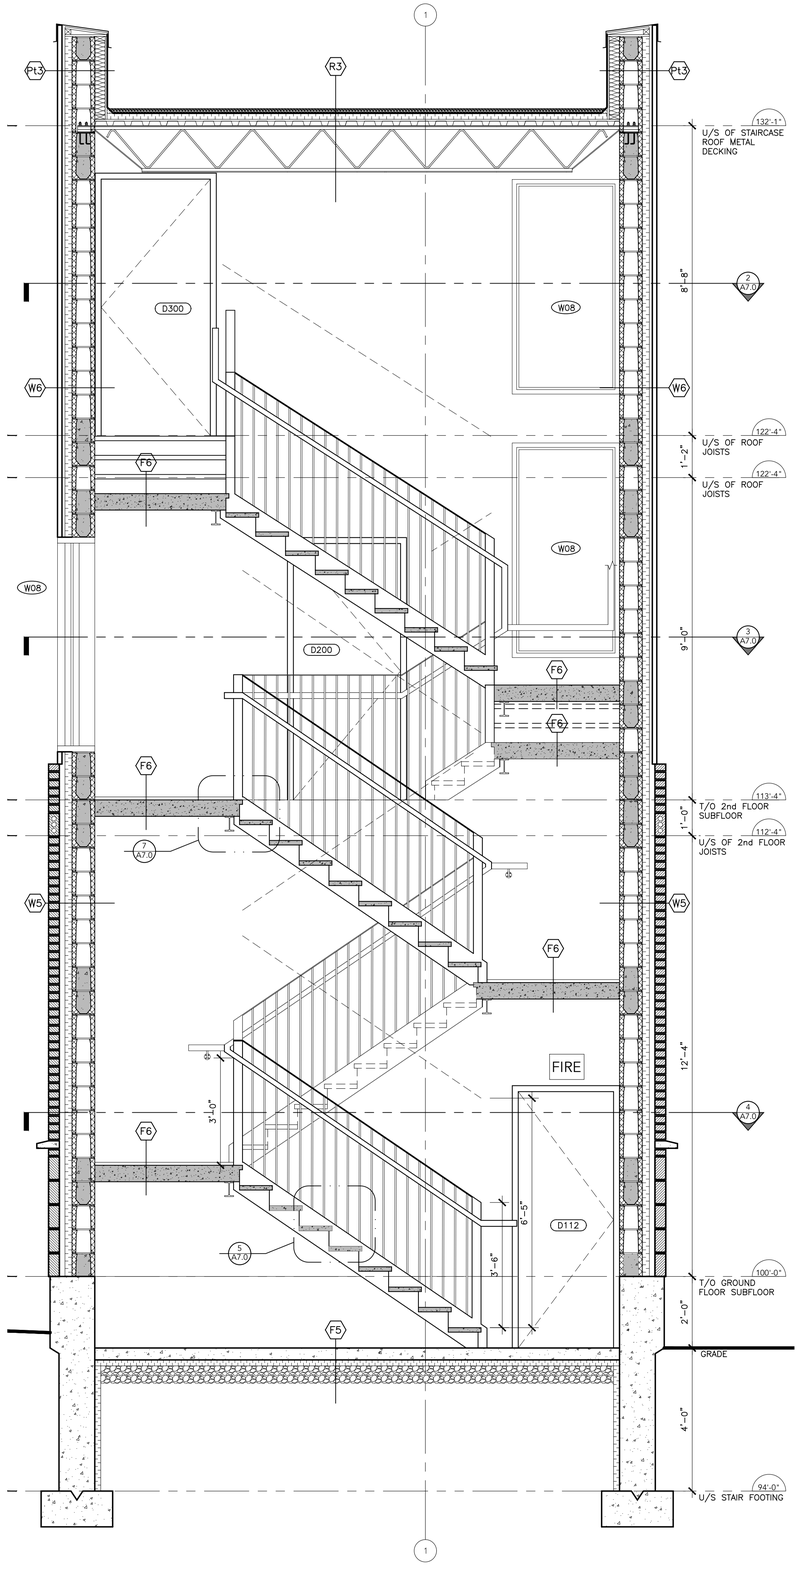


1 A7.0 STAIRCASE SECTION
SCALE: ½" = 1'-0"

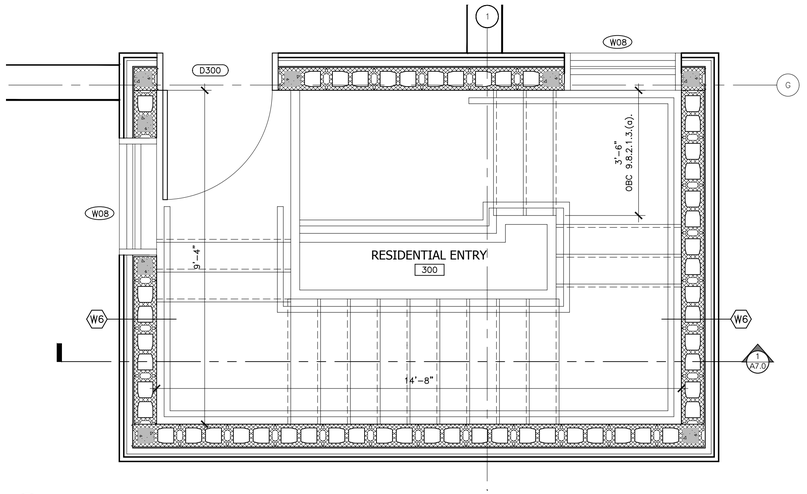


2 A7.0 ROOF STAIR PLAN
SCALE: ½" = 1'-0"

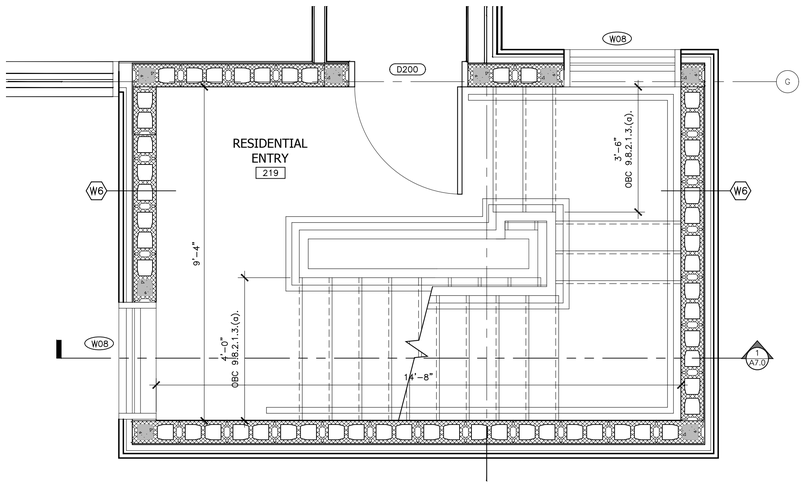


3 A7.0 SECOND FLOOR STAIR PLAN
SCALE: ½" = 1'-0"

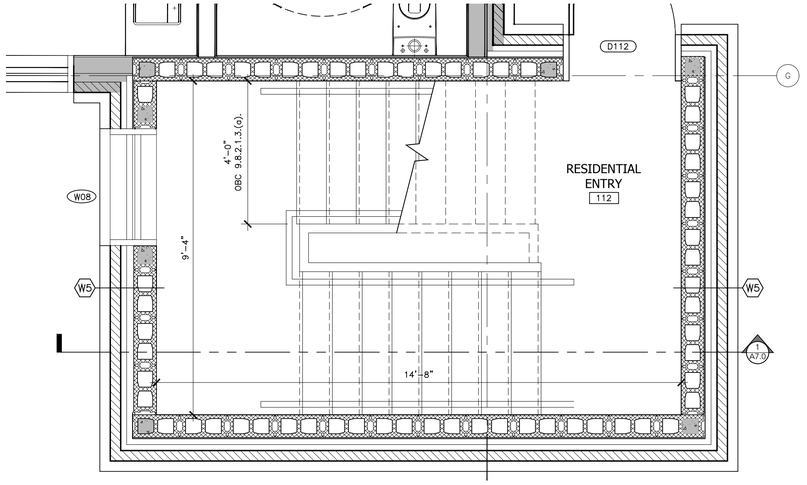


4 A7.0 GROUND FLOOR PLAN
SCALE: ½" = 1'-0"

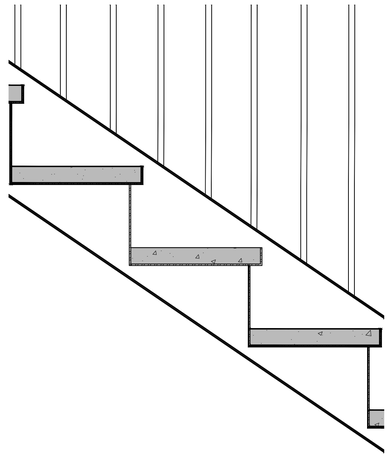

5 A7.0 STAIRCASE STEPS DETAIL
SCALE: 2" = 1'-0"

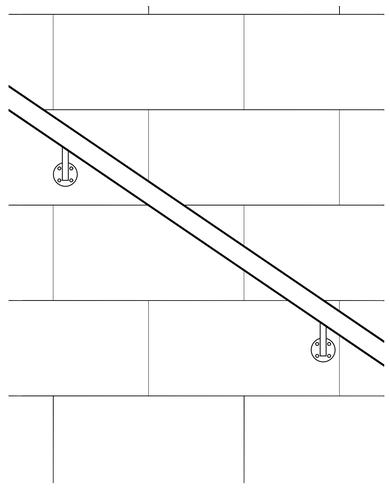

6 A7.0 STAIRCASE RAILING SECTION AT WALL DETAIL
SCALE: 2" = 1'-0"

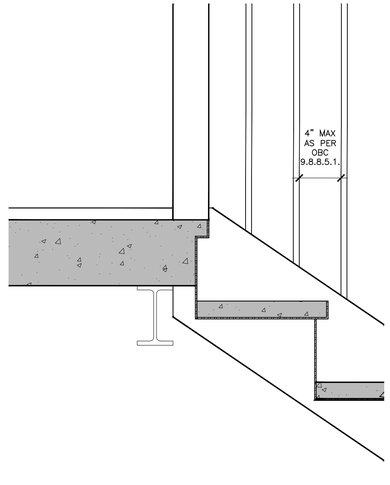

7 A7.0 STAIRCASE RAILING SECTION AT C CHANNEL
SCALE: 2" = 1'-0"

ALGONQUIN COLLEGE

ESTAFANOS

GENERAL NOTES:

1. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
2. ALL WORK MUST MEET OR EXCEED THE ONTARIO BUILDING CODES LATEST EDITION AND ALL OTHER APPLICABLE CODES AND STANDARDS. WHERE CONFLICTS OCCUR, THE HIGHER STANDARD GOVERNS.
3. THE CONTRACTOR IS RESPONSIBLE FOR TAKING AND CHECKING DIMENSIONS ON SITE. REPORT DISCREPANCIES TO THE ARCHITECT BEFORE COMMENCING ANY WORK.

1. HANDRAILS AS PER OBC 9.8.7.7.
2. GUARD RAILS AS PER OBC 9.8.7.2.

Rev.	YY/MM/DD	Revision
2	24/04/16	FINAL SUBMISSION
1	24/03/26	ASSIGNMENT SUBMISSION

Project Name:
WELLINGTON PLACE,
OTTAWA, ON

Sheet Title:
STAIRCASE SECTION,
PLANS, & DETAILS

Group Number:
ARC8403-010

Project North:

Drawn By: STEVEN ESTAFANOS

Date: 2024/02/13

Scale: AS NOTED

Project No.: 2024-01

Drawing No.: A7.0