Name of Practice:
Algonquin Centre for Construction Excellence
Architectural Technician Program
ARC8404C - Working Drawings IV
Winter 2025

Name of Project:
Refrigerated Food Storage and Distribution Facility

Location:
2420 Parkedale Ave, Brockville, Ontario

Submitted by:
Steven Estafanos


Date:
20 Feb 2025

Ontario Building Code Data Matrix Part 3

			Building Code Reference [1]
3.00	Building Code Version:	O. Reg. 332/12 — Last Amendment: O. Reg. 89/23	
3.01	Project Type:	☒ New Construction ☐ Addition ☐ Renovation ☐ Change of use ☐ Addition and renovation Description:	[A] 1.1.2.2.
3.02	Major Occupancy Classification:	Occupancy: D — Use: Offices F2 — Cold warehouse food storage	3.1.2.
3.03	Superimposed Major Occupancies:	☒ No ☒ Yes Description: Offices on second floor of warehouse	3.2.2.7.
3.04	Building Area (m^2)	Description: First Floor — Existing 0, New 1502, Total 1502 Second Floor — Existing 0, New 641, Total 641 Insert additional lines as needed — Existing 0, New 0, Total 0 Total — Existing 0, New 2143, Total 2143	[A] 1.4.1.2.

3.05	Gross Area (m^2)	Description:	Existing	New	Total	[A] 1.4.1.2.
			0	1502	1502	
			0	0	0	
			0	0	0	
		Insert additional lines as needed	0	0	0	
		Total	0	1502	1502	
3.06	Mezzanine Area (m^2)	Description:	Existing	New	Total	3.2.1.1.
			0	0	0	
			0	0	0	
			0	0	0	
		Insert additional lines as needed	0	0	0	
		Total	0	0	0	
3.07	Building Height	2 Storeys above grade — 9.5 (m) Above grade 0 Storeys below grade				[A] 1.4.1.2. & 3.2.1.1.
3.08	High Building	☒ No ☐ Yes				3.2.6.
3.09	Number of Streets/ Firefighter access	1 street(s)				3.2.2.10. & 3.2.5.
3.10	Building Classification: (Size & Construction Relative to Occupancy)	3.2.2.70 — Group/Div F2				3.2.2.20 - 83.
3.11	Sprinkler System	☐ Required ☐ Not Required Provided: ☐ entire building ☐ selected compartments ☐ selected floor areas ☐ basement ☐ in lieu of roof rating ☐ none Description:				3.2.1.5. & 3.2.2.17., 3.2.2.18., 3.2.4.8. to 3.2.4.10., and 3.2.5.13
3.12	Standpipe System	☐ Not required ☐ Required				3.2.9.
3.13	Fire Alarm System	☐ Required ☐ Not required Type Provided: ☐ Single stage ☐ Two stage ☐ None				3.2.4.
3.14	Water Service / Supply is Adequate	☐ No ☐ Yes				3.2.5.7.

3.15	Construction Type:	Restriction: ☐ Combustible permitted ☒ Non-combustible required ☐ Encapsulated mass timber Actual: ☐ Combustible ☒ Non-combustible ☐ Combination of combustible and non-combustible ☐ Encapsulated mass timber ☐ Combination of encapsulated mass timber and non-combustible Heavy Timber Construction: ☐ No ☐ Yes				3.2.2.20.- 83. & 3.2.1.4.
3.16	Importance Category:	☐ Low ☐ Low human occupancy ☐ Post-disaster shelter ☐ Normal ☐ High ☒ Minor storage building ☐ Explosive or hazardous substances ☐ Post-disaster				4.1.2.1.(3) & T4.1.2.1.B
3.17	Seismic Hazard Index:	(I_E Fa Sa (0.2)) = 0 Seismic design required for Table 4.1.8.18. items 6 to 21: ((I_E Fa Sa (0.2)) ≥ 0.35 or Post-disaster) ☐ No ☐ Yes				4.1.2.1.(3) 4.1.8.18.(1)
3.18	Occupant Load	Floor Level/Area — Occupancy Type — Based On — Occupant Load (Persons) — Posted Limit Required				3.1.17. and 3.1.17.1.(2)
		1 — F2 — 28 — 0				
		2 — D — 9.3 — 0				
		Insert additional lines as needed — 0				
		0				
3.19	Barrier-free Design:	☐ Yes ☒ No — No elevator				3.8.
	Barrier-free Entrances:	Number 0 — No stairs or ramps. Entire building not accessible to any users at any time				3.1.8.2.
3.20	Hazardous Substances:	☐ Yes Explanation ☒ No				3.3.1.2. & 3.3.1.19.

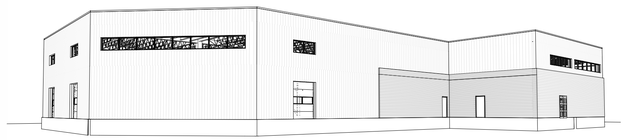

Sheet List

Sheet Number	Sheet Name
A100	Cover
A101	First Floor Plan
A102	Second Floor Plan
A201	Building Section
A301	Project North Elevation Project East Elevation
A302	Project South Elevation Project West Elevation
A401	Wall Section & Section Details
A402	Wall Section & Section Details
A403	Plan Details
A501	Stair Analysis, Plan & Section
A601	Construction Assemblies, Notes, Ledgers and Schedules

3.21	Required Fire Resistance Ratings	Horizontal Assembly — Rating (H) — Supporting Assembly (H) — Noncombustible in lieu of rating?	3.2.2.20 - 83., 3.2.1.2., 3.2.1.4., 3.2.2.15.
		Storeys below grade — 0 — 0 — ☐ No ☐ Yes ☐ N/A	
		Floors over basement — 0 — 0 — ☐ No ☐ Yes ☐ N/A	
		Floors — 0 — 0 — ☐ No ☐ Yes ☐ N/A	
		Mezzanine — 0 — 0 — ☐ No ☐ Yes ☐ N/A	
		Roof — 0 — 0 — ☐ No ☐ Yes ☐ N/A	
3.22a	Spatial Separation	Exposing Building Face — EBF Area (m^2) — L.D. (m) — L/H or H/L — Required FRR (H) — % Unprotected Openings Permitted — % Unprotected Openings Provided	3.2.3.
		0 0 0 0	
		0 0 0 0	
		0 0 0 0	
		Insert additional lines as needed — 0 0 0 0	
3.22b	Spatial Separation Continued	EBF (repeated) — Construction Type — Cladding Type	
		☐ Noncombustible	
		☐ Noncombustible	
		☐ Noncombustible	
		Insert additional lines as needed — ☐ Noncombustible	
3.23a	Plumbing Fixture Requirements*	Ratio: Male:Female = 50:50 Except as noted otherwise	3.7.4., 3.8.2.3.
		Floor Level/Area — Occupant Load — OBC Reference — WCs Required — WCs Provided	
		0 — 0 — 0	
		0 — 0 — 0	
		Insert additional lines as needed — 0 — 0 — 0	
		0 — 0 — 0	

3.23b	Plumbing Fixture Requirements continued:	Floor Level/Area (repeated) — Barrier-free WCs Required — Barrier-free WCs Provided — Universal Washrooms Required — Universal Washrooms Provided	Tables 3.8.2.3.A and 3.8.2.3.B
		0 — 0 — 0 — 0	
		0 — 0 — 0 — 0	
		Insert additional lines as needed — 0 — 0 — 0 — 0	
3.24	Energy Efficiency:	Compliance Path: Climate Zone: Degree Days Below 18 C:	12.2.1.2 SB-1 Table 2
3.25	Sound Transmission Design:	Is there more than 1 dwelling unit per building: ☐ Yes ☐ No Option Implemented: Notes:	SB-3, 5.8.1.2.(2), 5.8.1.4., & 5.8.1.5.
3.25	Notes:	Insert additional lines as needed	

1 *All references are to Division B of the OBC, unless preceded by [A] for Division A and [C] for Division C.*

ALGONQUIN COLLEGE

PROJECT TITLE: Refrigerated Food Storage and Distribution Facility


PROJECT NUMBER: WDIV-W25-01

PROJECT ADDRESS: 2420 Parkedale Ave Brockville, ON K6V 3G8

PROGRAM TITLE: Architectural Technician Working Drawings IV

STUDENT NAME:	STUDENT NO:
Steven Estafanos	
COURSE: ARC 8604	SECTION: 040
SEMESTER: Winter 2025	DATE: 20 Feb 2025

2/22/2025 9:31:32 PM

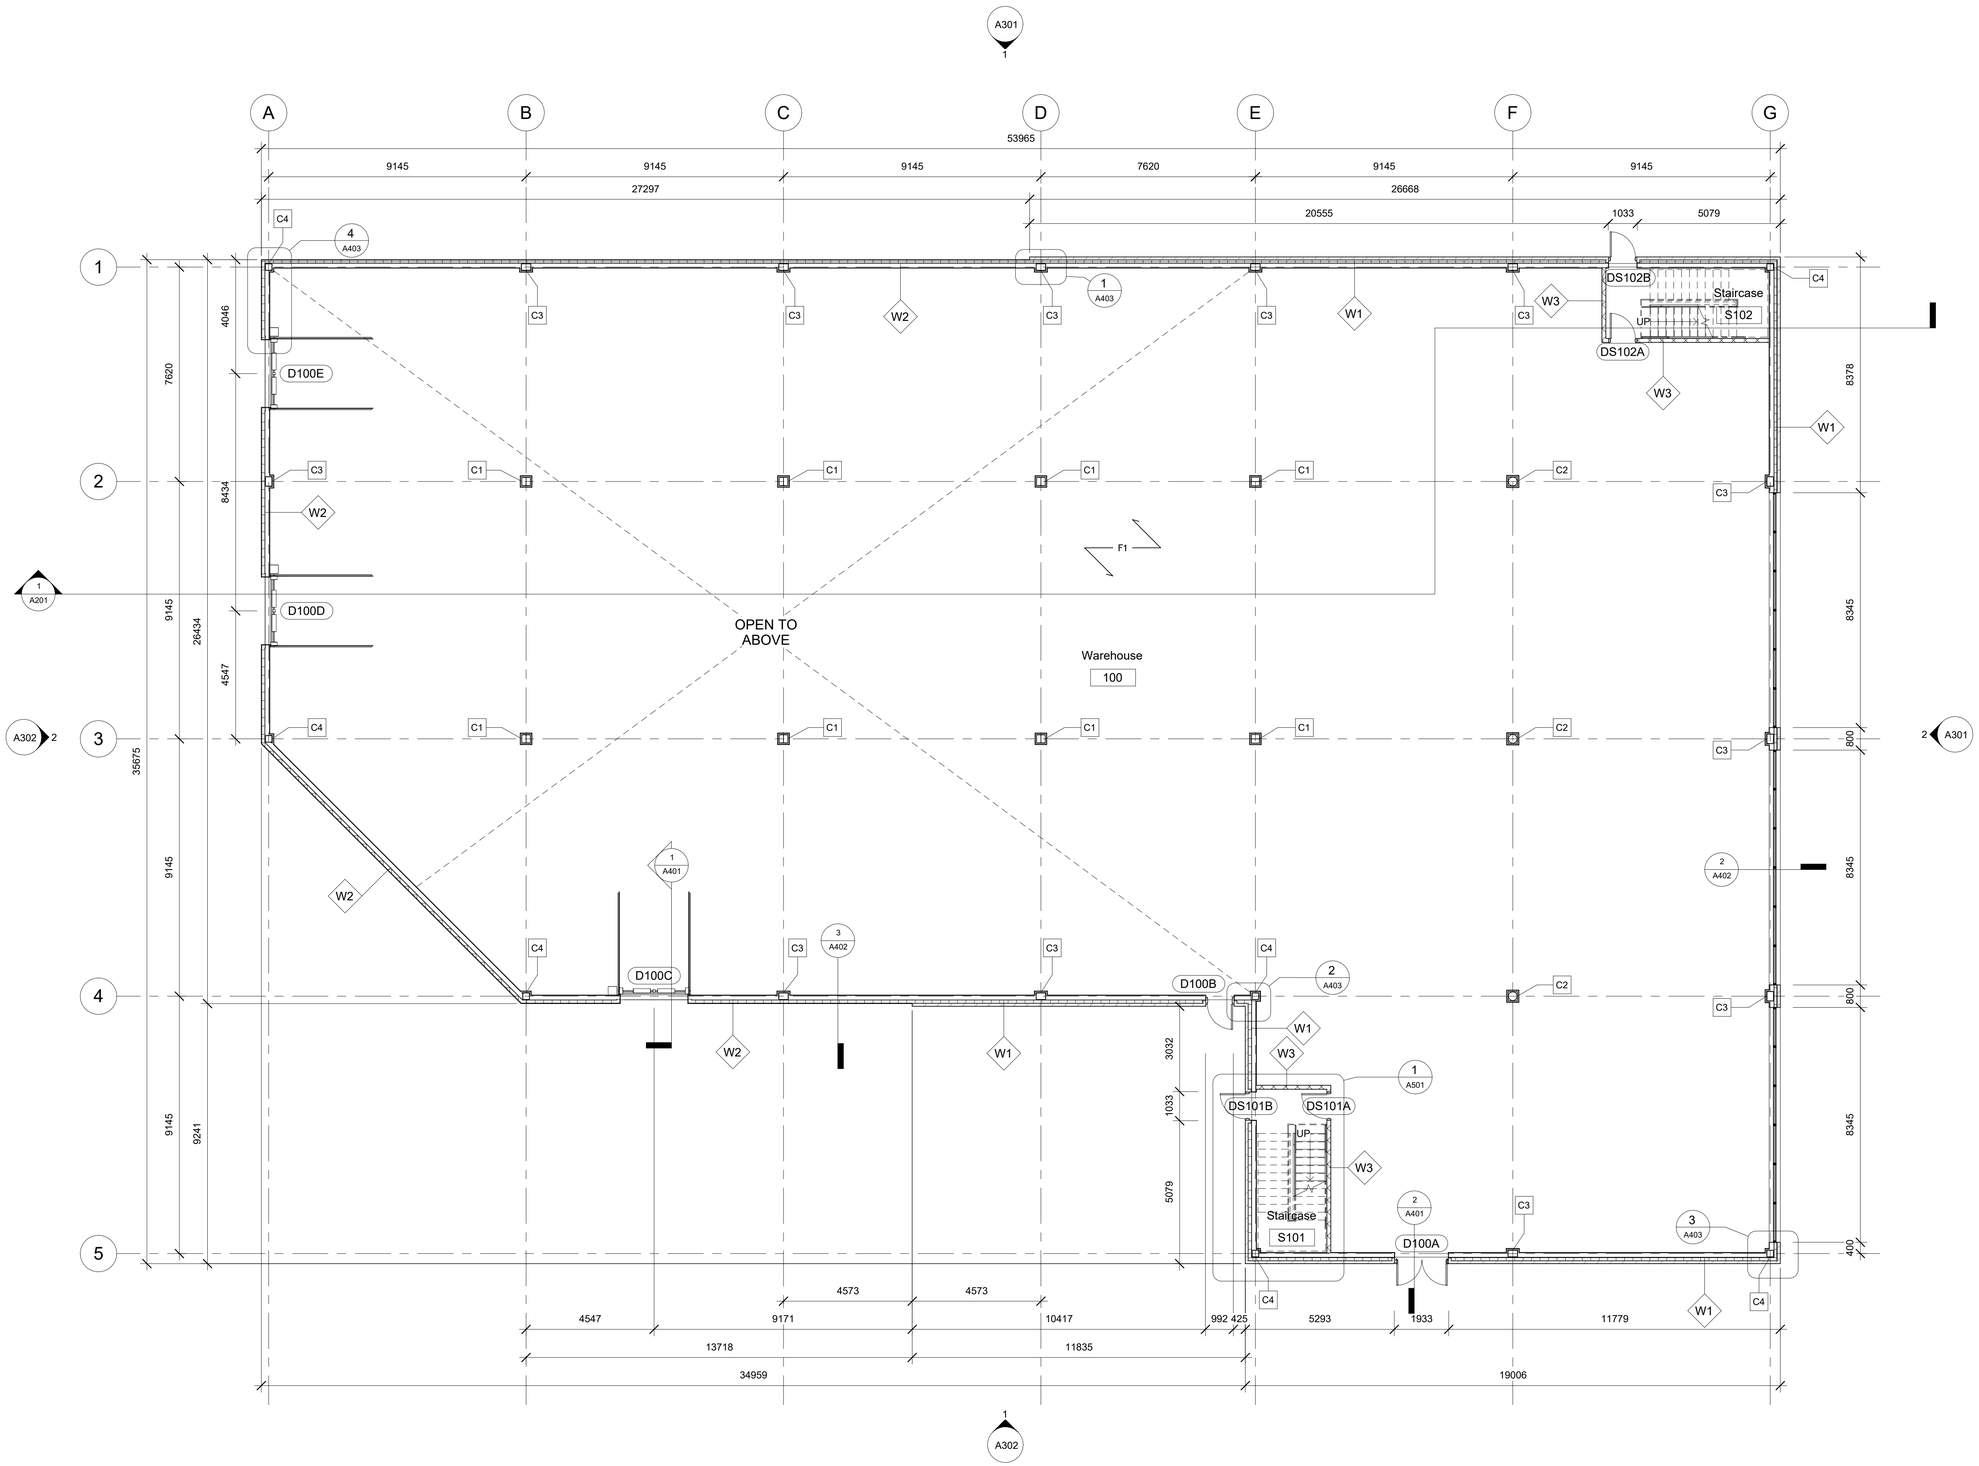




DO NOT SCALE DRAWINGS


CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©


Project North


True North

REFER TO DRAWING A-601 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P2.

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility


DRAWING TITLE:
First Floor Plan

SCALE:	DATE:
1 : 100	20 Feb 2025
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-01	Steven Estafanos

SHEET No.:

A101

2/22/2025 9:31:34 PM

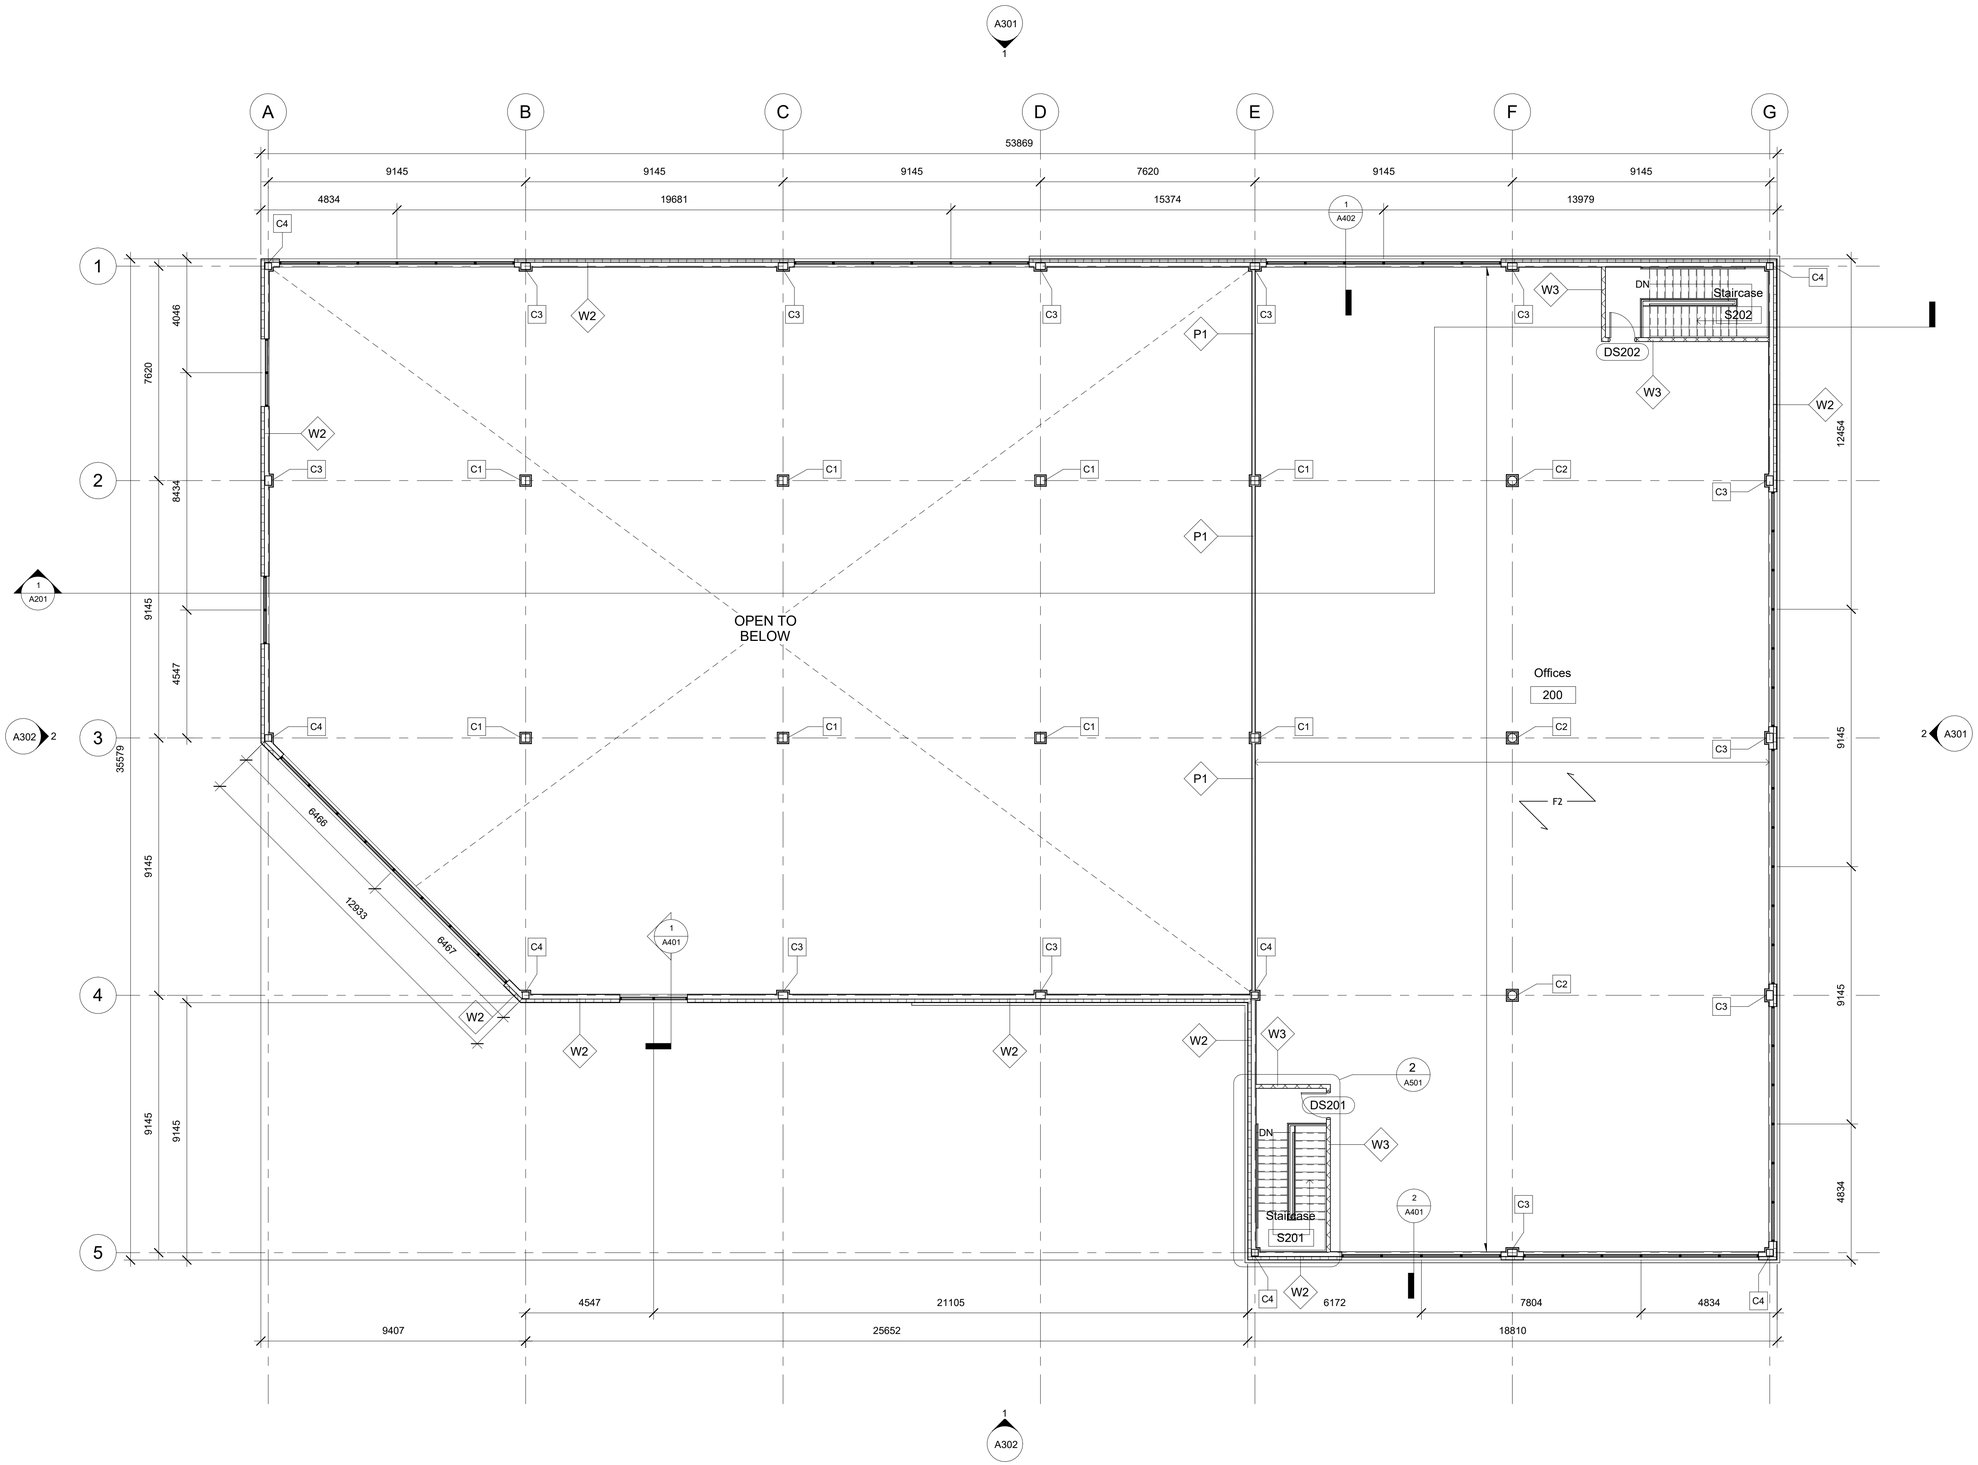

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

Project North

True North

REFER TO DRAWING A-601 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P2.

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility


DRAWING TITLE:
Second Floor Plan

SCALE:	DATE:
1 : 100	20 Feb 2025
PROJECT NUMBER: WDIV-W25-01	DRAWN BY: Steven Estafanos

SHEET No.:

A102

2/22/2025 9:51:37 PM

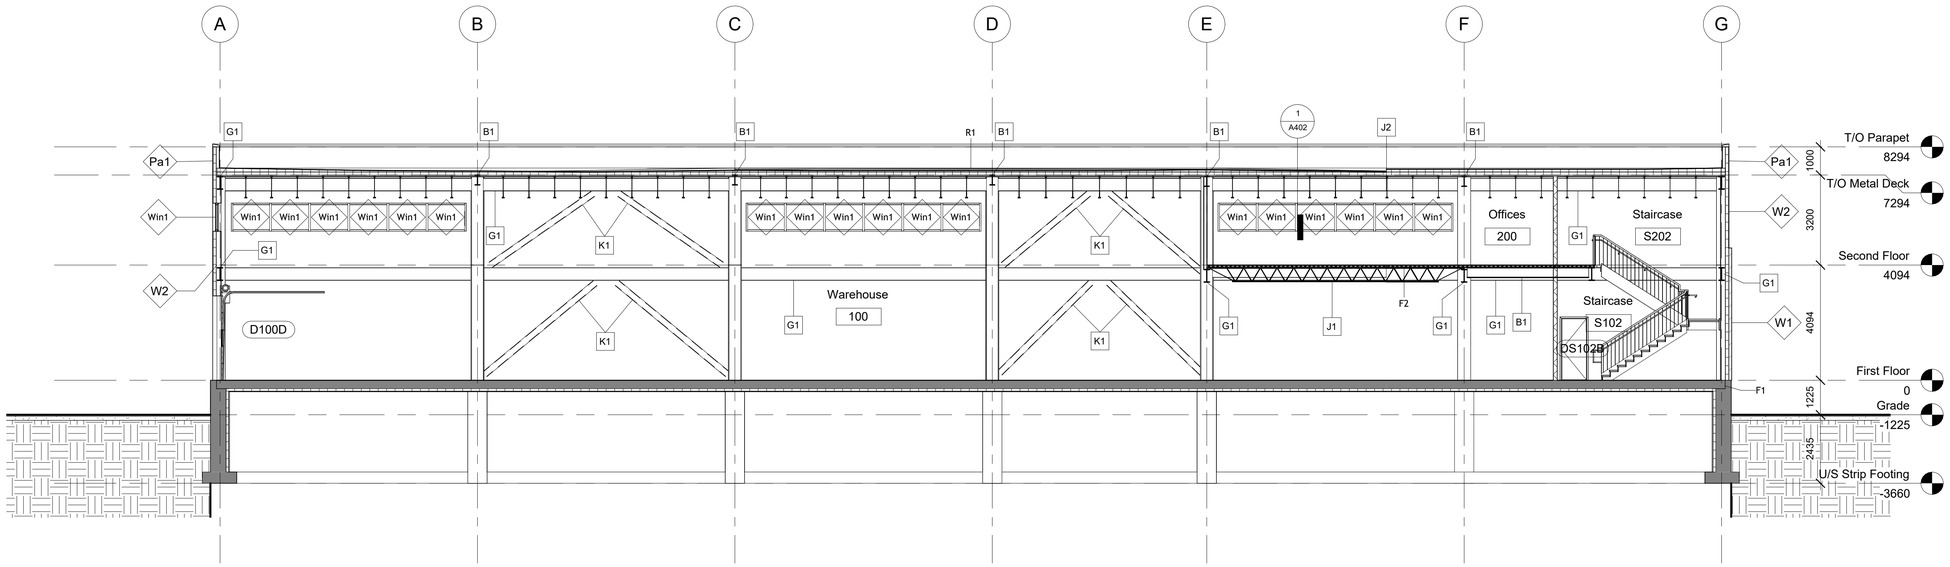

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-601 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility


DRAWING TITLE:
Building Section

SCALE:	DATE:
1 : 100	20 Feb 2025
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-01	Steven Estafanos


SHEET No.:

A201

2/22/2025 9:31:40 PM

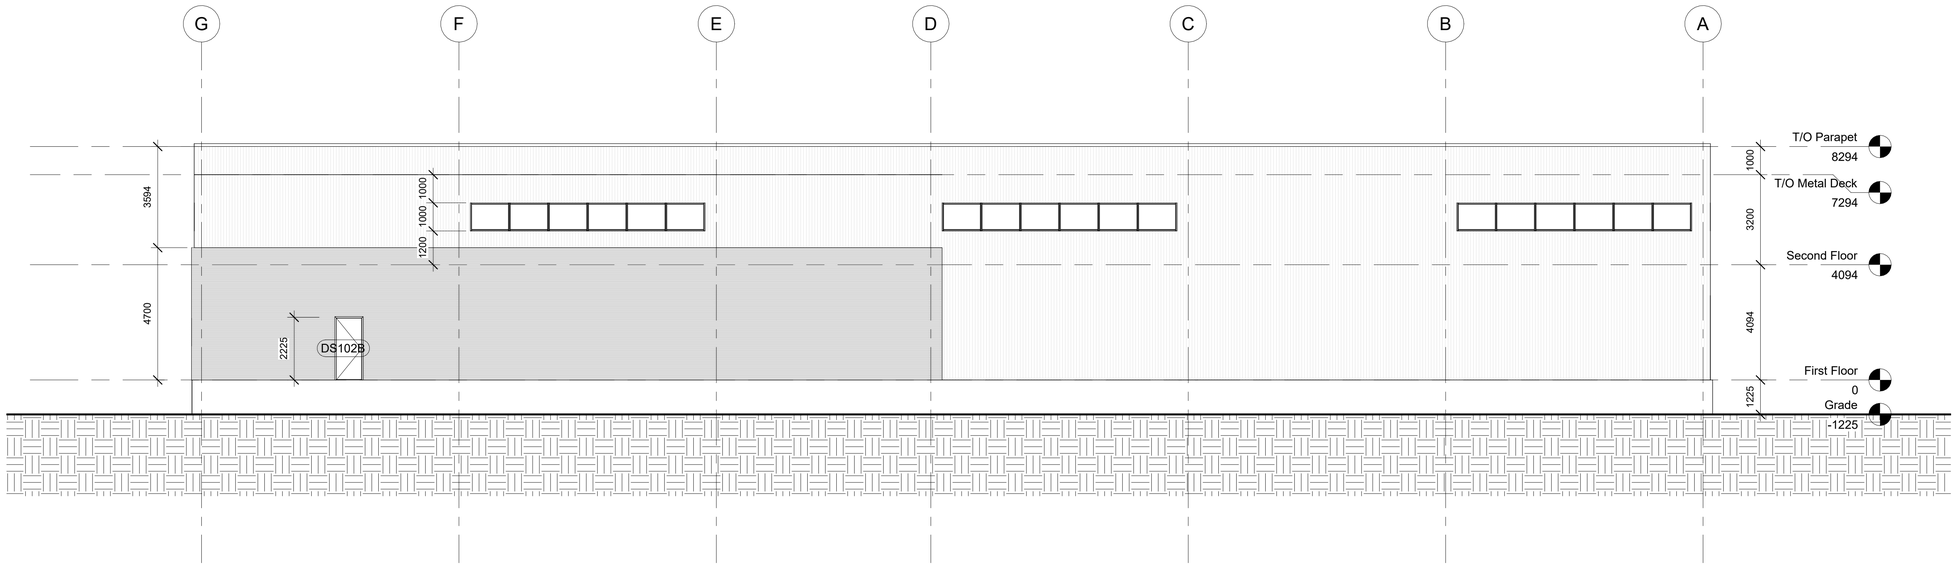

1 North
1 : 100

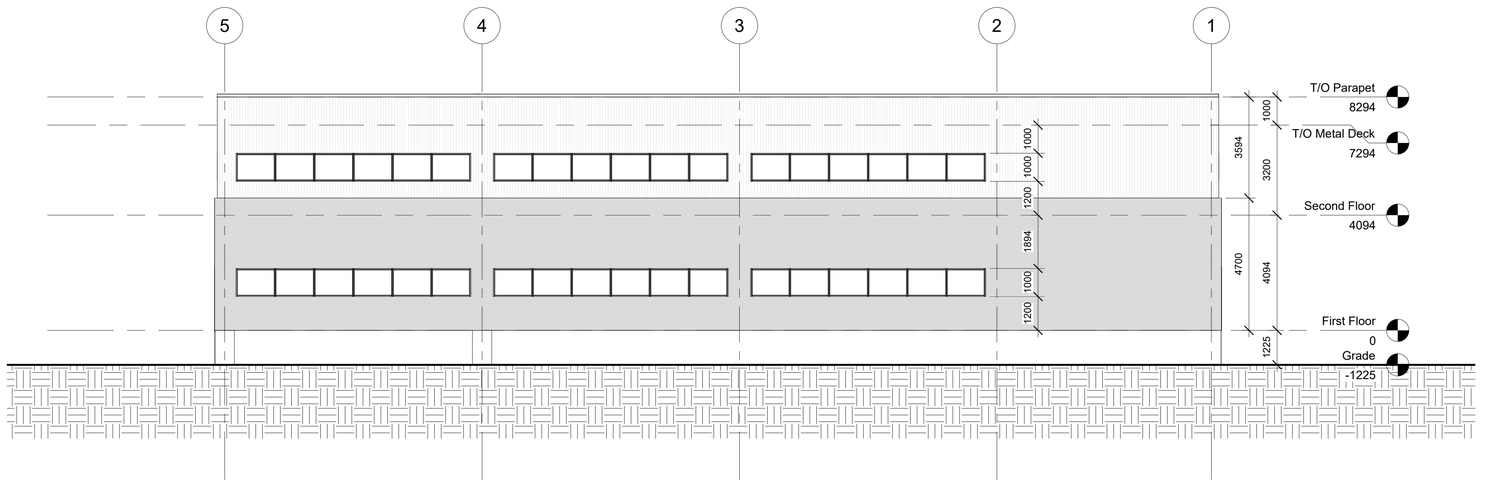

2 East
1 : 100

Brick

Vicwest Grandrib vertical metal siding

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-601 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility


DRAWING TITLE:
Project North Elevation
Project East Elevation

SCALE:	DATE:
As indicated	20 Feb 2025
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-01	Steven Estafanos


SHEET No.:

A301

2/22/2025 9:31:43 PM

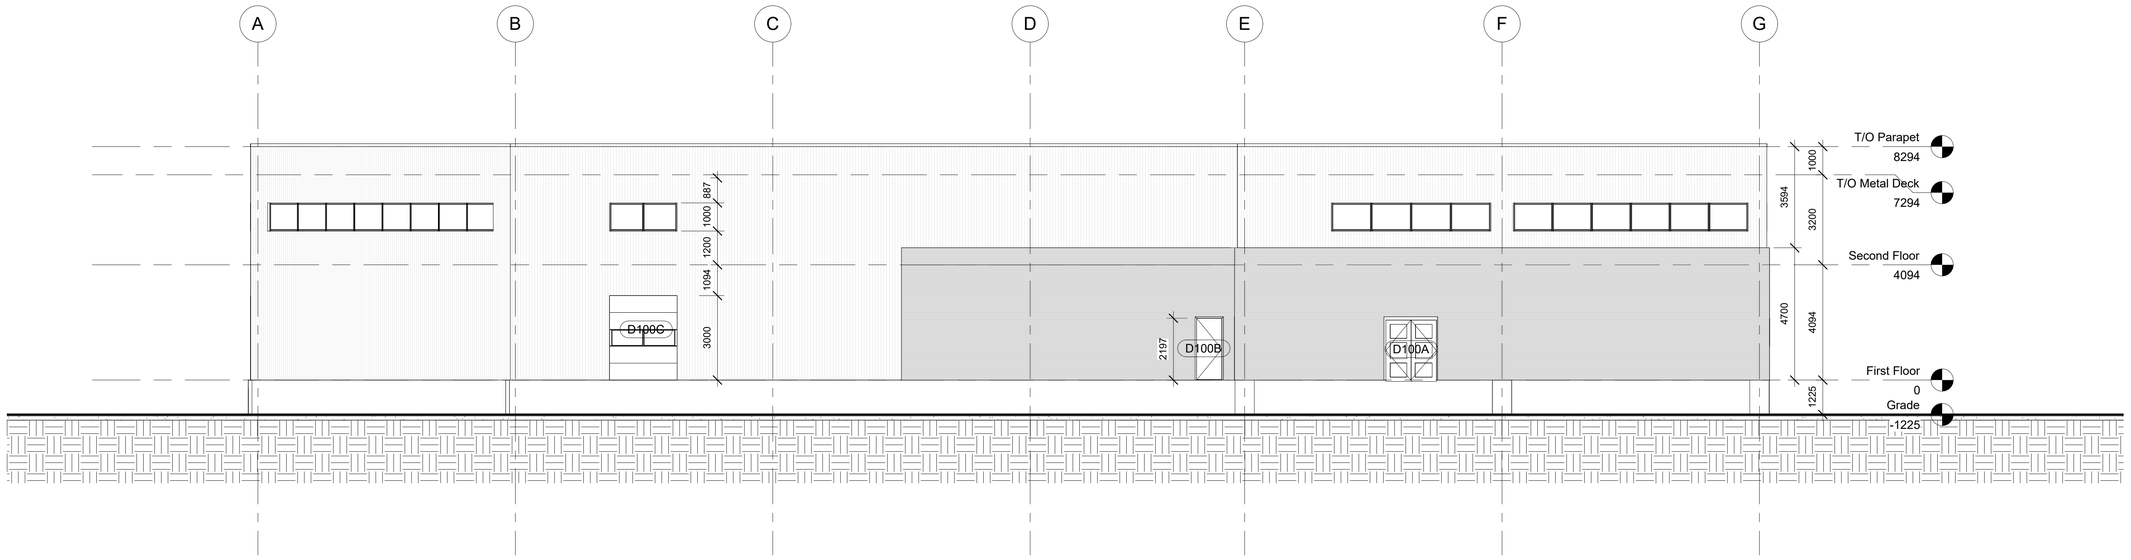

1 South
1 : 100

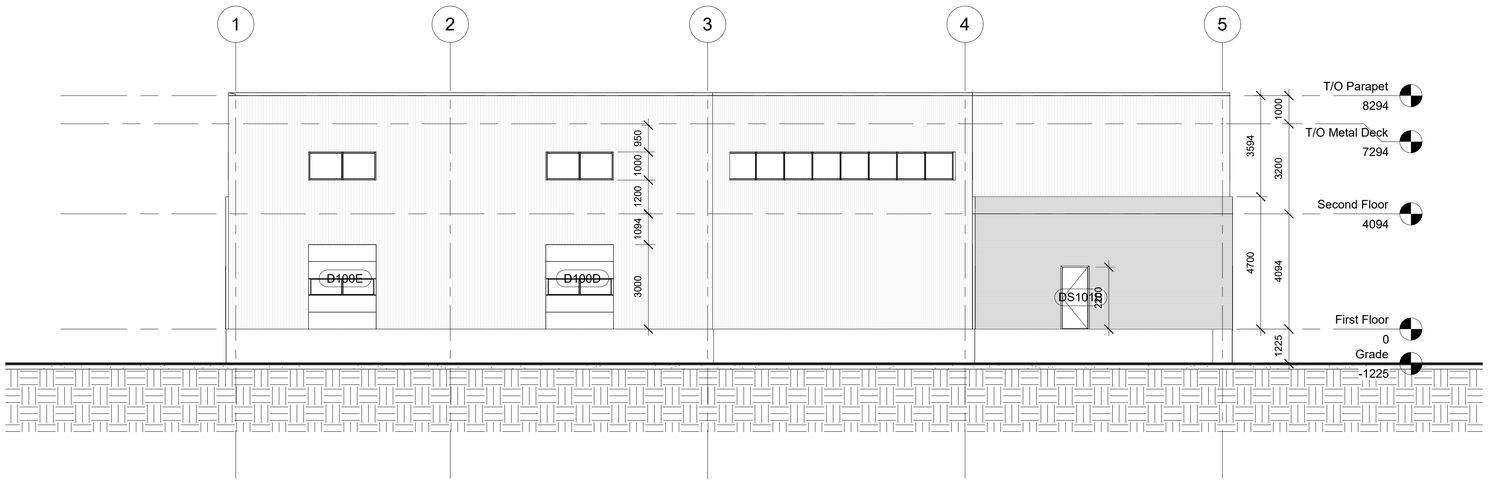

2 West
1 : 100

Brick

Vicwest Grandrib vertical metal siding

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-601 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility


DRAWING TITLE:
Project South Elevation
Project West Elevation

SCALE:	DATE:
As indicated	20 Feb 2025
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-01	Steven Estafanos


SHEET No.:

A302

2/22/2025 9:31:49 PM

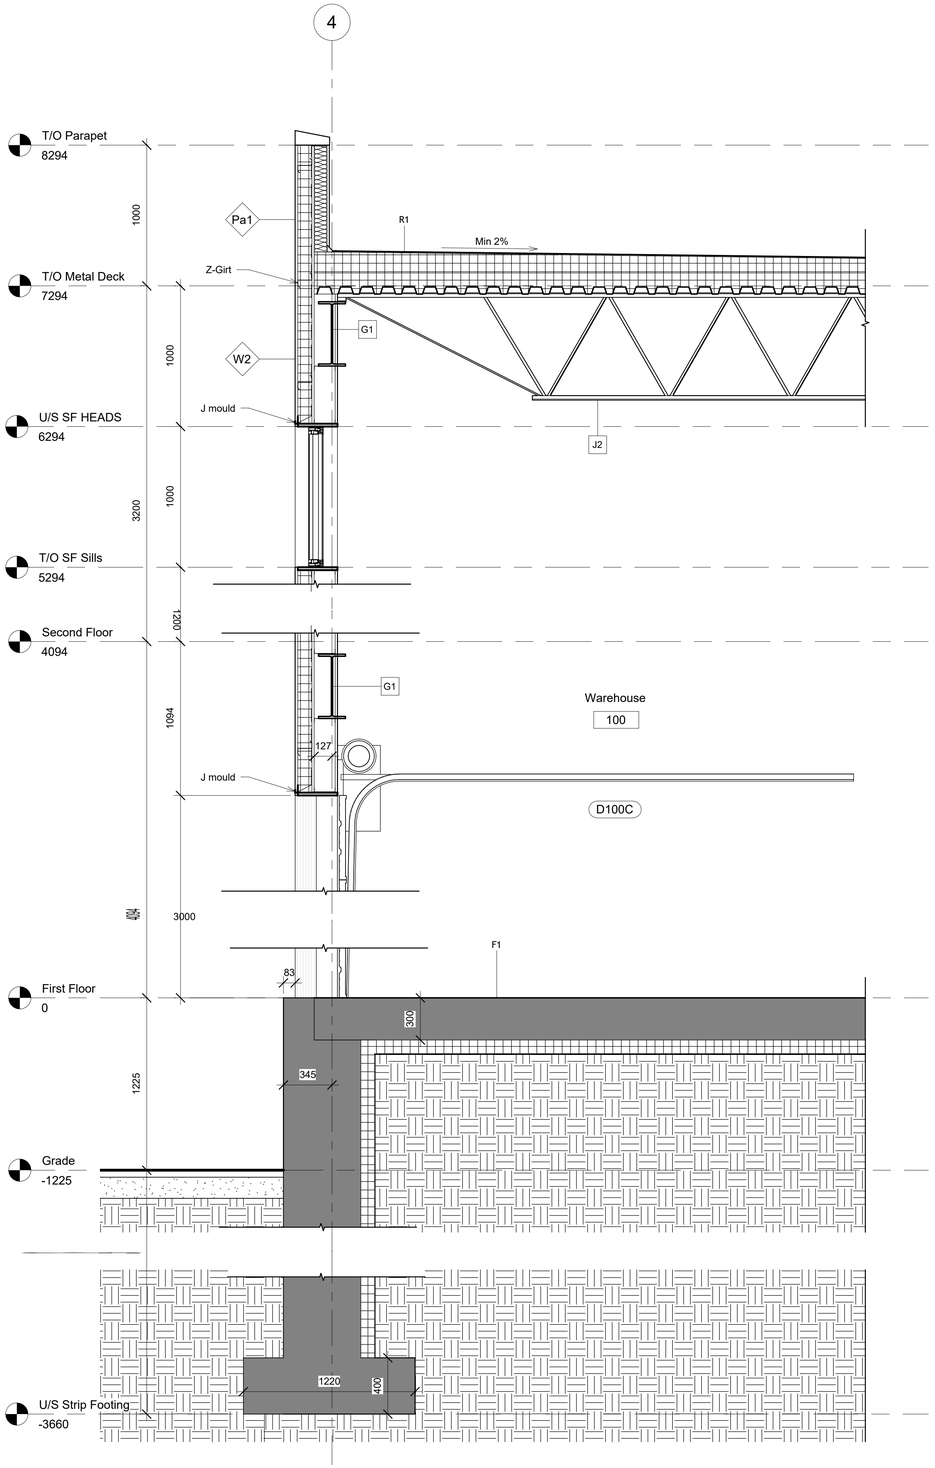

1 Wall Section
1 : 20

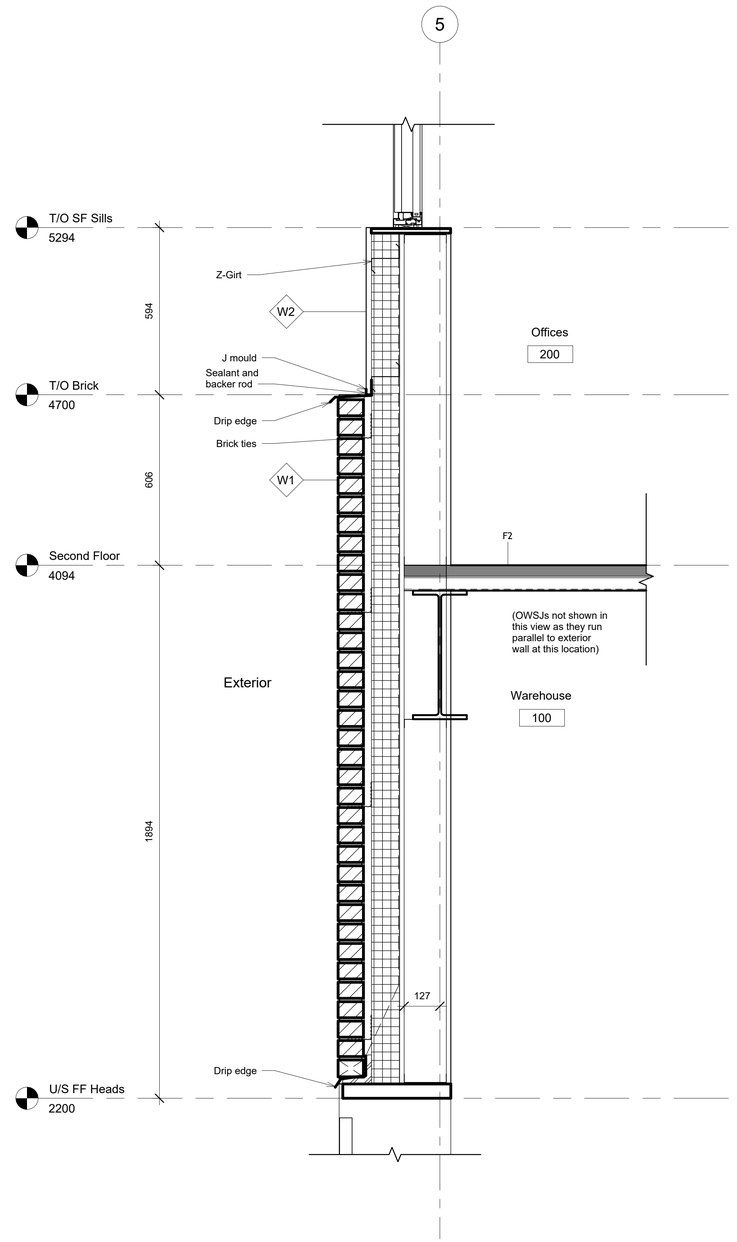

2 Second floor incl. window sill & exterior exit door head
1 : 10

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-601 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility


DRAWING TITLE:
Wall Section & Section Details

SCALE:	DATE:
As indicated	20 Feb 2025
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-01	Steven Estafanos


SHEET No.:

A401


2/22/2025 9:31:50 PM

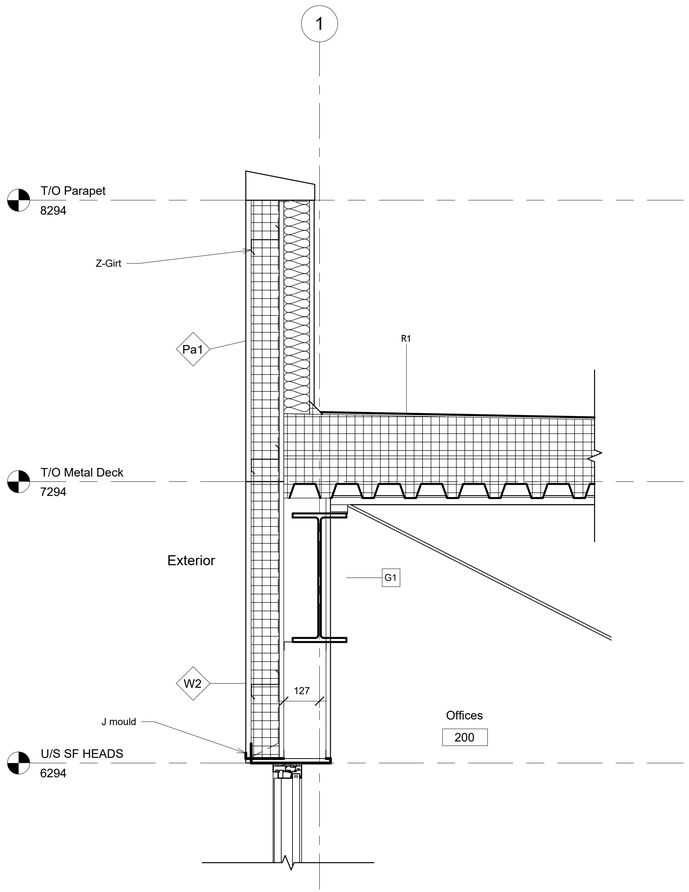

1 Parapet/roof incl. window head
1 : 10

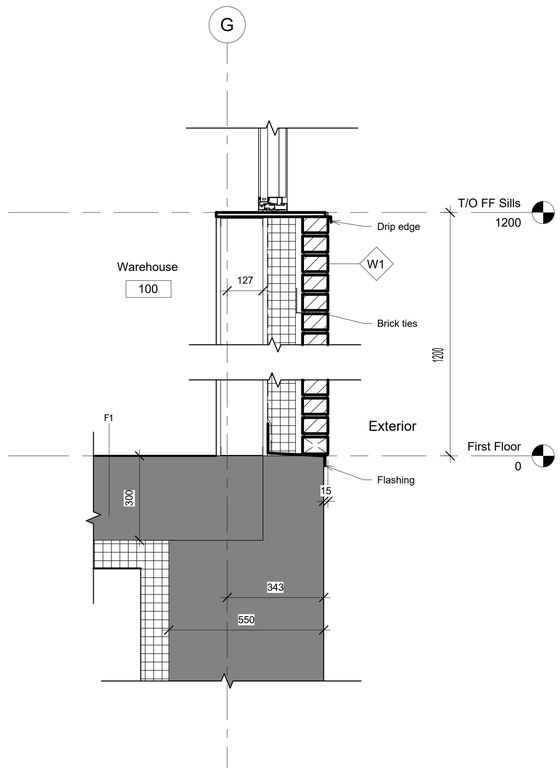

2 BVSS wall system base/foundation detail including window sill
1 : 10

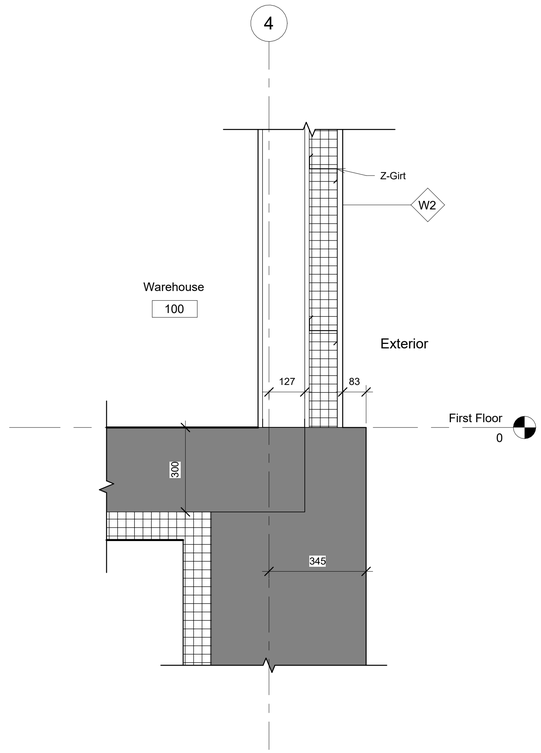

3 Metal Sheet Cladding Z Girt Steel Stud System base/foundation detail
1 : 10



DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-601 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility


DRAWING TITLE:
Wall Section & Section Details

SCALE:	DATE:
1 : 10	20 Feb 2025
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-01	Steven Estafanos


SHEET No.:

A402


2/22/2025 9:31:52 PM

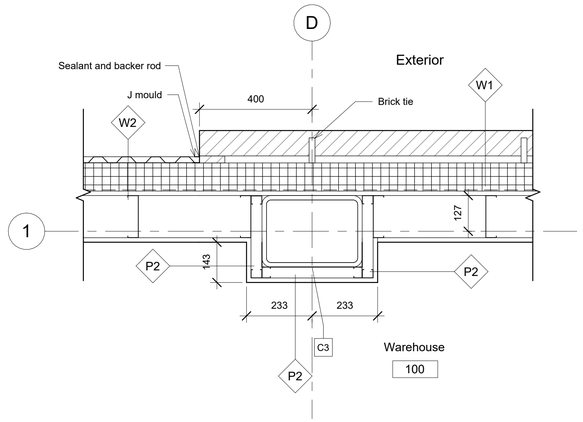


1 Typ. BVSS/Metal Sheet Cladding Intersection
1 : 10

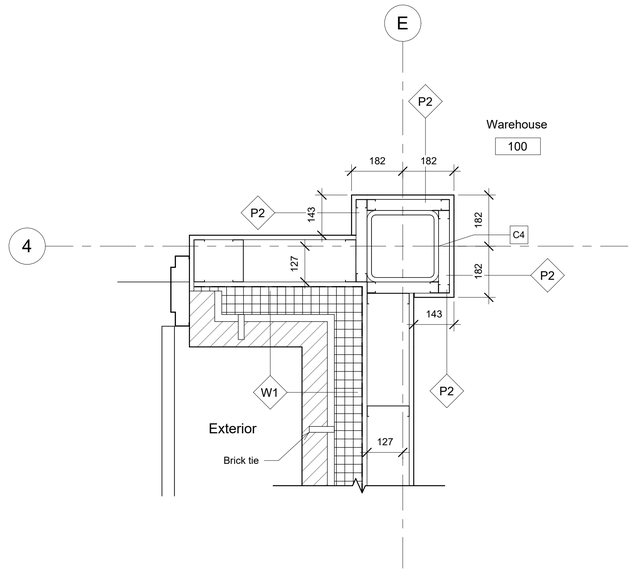

2 Typ. BVSS Inside Corner Detail incl Steel Door Exit Jamb Detail
1 : 10

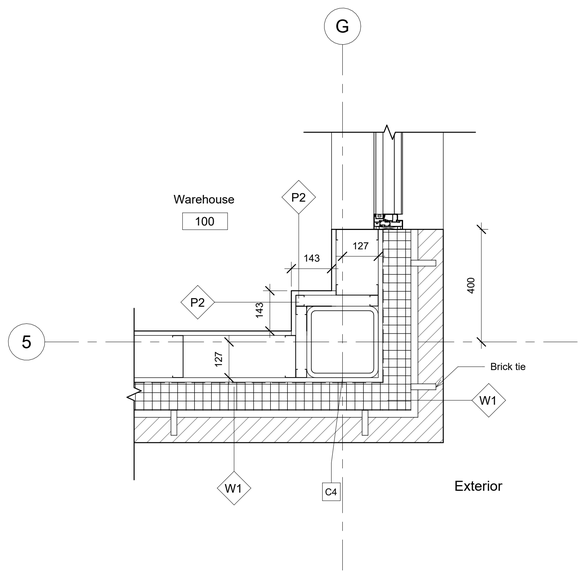

3 Typ. BVSS Outside Corner Detail Incl. Typ. Window Jamb
1 : 10

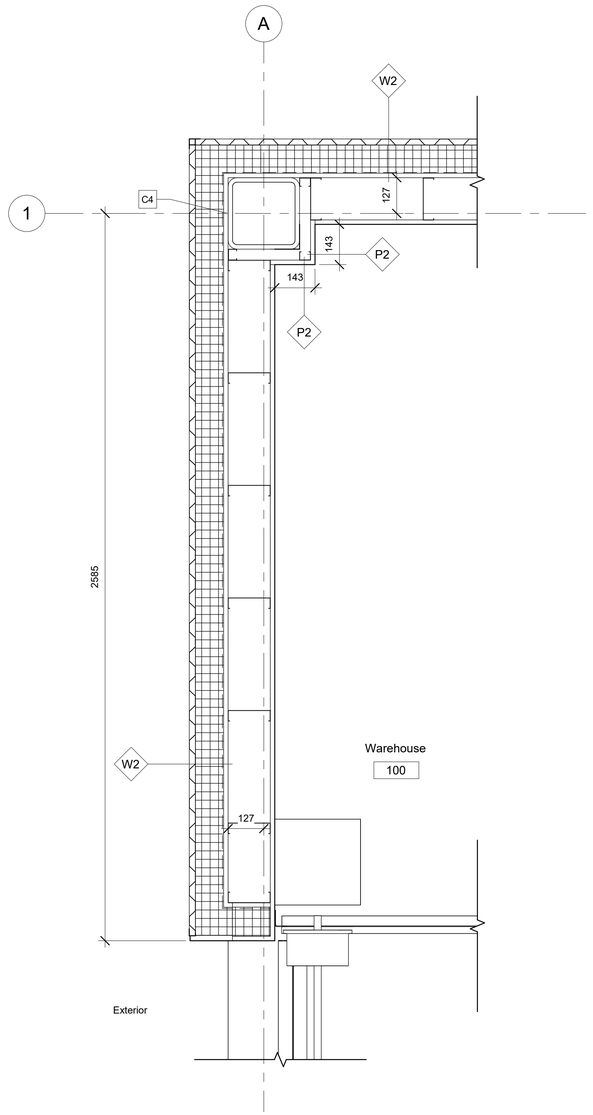

4 Typ. Metal Sheet Cladding Corner Detail incl. Overhead Door Jamb Detail
1 : 10

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

Project North

True North

REFER TO DRAWING A-601 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility


DRAWING TITLE:
Plan Details

SCALE:	DATE:
1 : 10	20 Feb 2025
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-01	Steven Estafanos


SHEET No.:

A403


2/22/2025 9:31:53 PM

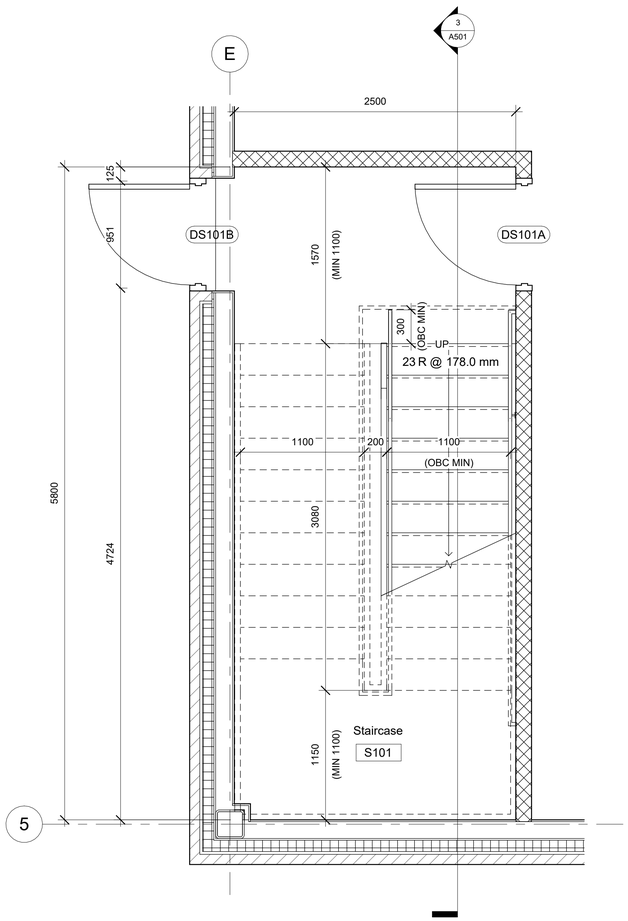

1 Staircase S101 First Floor Plan
1 : 25

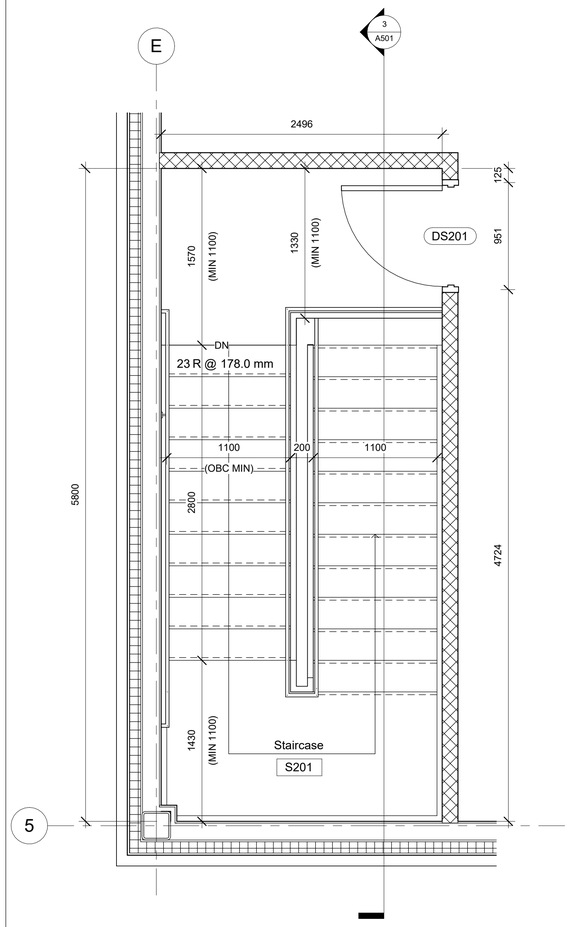

2 Staircase S201 Second Floor Plan
1 : 25

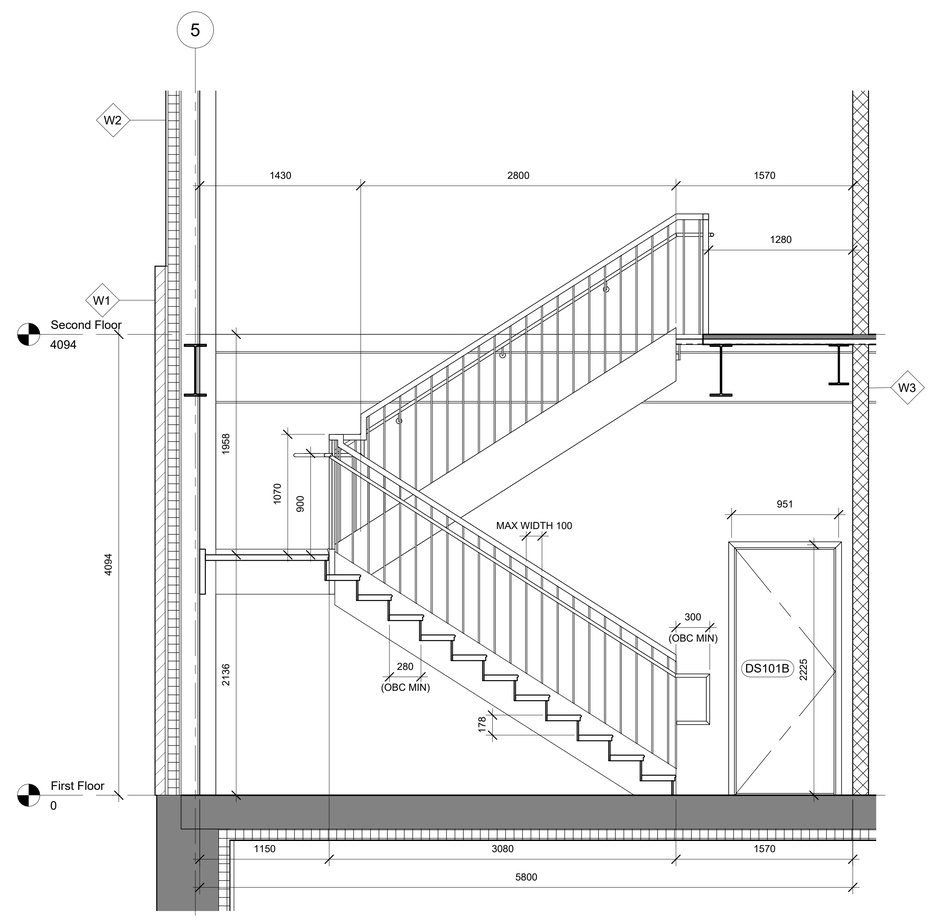

3 Staircase SX01 Section
1 : 25

Overall floor to floor height = 4094 (OBC 3.4.3.2.(1).(b))

Min run depth = 280, max ri height = 180 (OBC T3.1.17.1)

Stair width: Area of SF = 641 m^2
Occupancy: office (Group D) = 9.31/m^2
= 69 persons

69 x 8 = 552 -> 1100 (OBC 3.4.3.2.(7).(c))
Landing width = 1100 (OBC 3.4.3.2.(7).(a))

Number of steps = 4094/180 = 22.74 or 23 ri @ ri height 178 mm




DO NOT SCALE DRAWINGS


CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©


Project North


True North

REFER TO DRAWING A-601 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility

DRAWING TITLE:
Stair Analysis, Plan & Section


SCALE:	DATE:
1 : 25	20 Feb 2025
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-01	Steven Estafanos

SHEET No.:


A501

2/22/2025 9:31:54 PM


Wall Assemblies

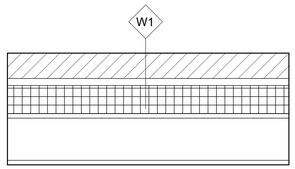


90	Metric Jumbo Brick Veneer-Contemporary Series Colour = Charcoal Matt Finish = Velour Coursing = Running Bond
25	airspace (minimum)
100	*extruded polystyrene (XPS)* rigid type insulation
15.9	Securock® Brand UltraLight Glass-Mat Sheathing (Regular and Firecode® X)
150	1.6mm (16ga.) lightweight steel framing back-up wall
15.9	Sheetrock® Brand AR Firecode® X Panels c/w paint finish

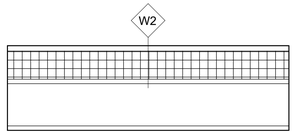


19	VICWEST Grand Rib GR30R Type = exposed fastener cladding Colour = Regent Grey 56082 Thickness = 0.551 (26ga.) Direction = vertical Z-girts
100	*extruded polystyrene (XPS)* rigid type insulation
15.9	Securock® Brand UltraLight Glass-Mat Sheathing (Regular and Firecode® X)
150	1.6mm (16ga.) lightweight steel framing back-up wall
15.9	Sheetrock® Brand AR Firecode® X Panels c/w paint finish




140	Concrete Masonry Unit



15.9	Sheetrock® Brand AR Firecode® X Panels c/w paint finish
92	1.6mm (16ga.) lightweight steel framing back-up wall
15.9	Sheetrock® Brand AR Firecode® X Panels c/w paint finish




15.9	Sheetrock® Brand AR Firecode® X Panels c/w paint finish
39	1.6mm (16ga.) lightweight steel framing back-up wall

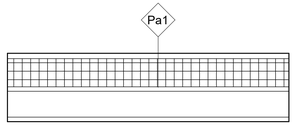


19	VICWEST Grand Rib GR30R Type = exposed fastener cladding Colour = Regent Grey 56082 Thickness = 0.551 (26ga.) Direction = vertical Z-girts
100	*extruded polystyrene (XPS)* rigid type insulation
15.9	Securock® Brand UltraLight Glass-Mat Sheathing (Regular and Firecode® X)
92	1.6mm (16ga.) lightweight steel framing back-up wall
15.9	Sheetrock® Brand AR Firecode® X Panels c/w paint finish

Floor and Roof Assemblies

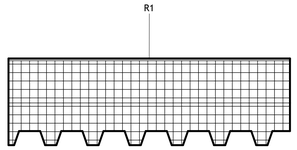


SOPREMA 2-ply modified bituminous membrane system
1. Mineral Coated Cap Sheet
2. Base Sheet
3. Protection Board

150 *polyisocyanurate (polyiso)* rigid type insulation (additional tapered at 2% for drainage)



90 Concrete topping c/w
Composite metal floor deck

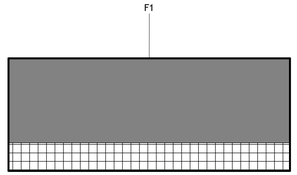

35MPa concrete slab = *300* c/w *152x152x13.1 W.W.M.*

Structural Column Schedule

Mark	Type
C1	HP310X79
C2	HSS323.9X12.7
C3	HSS355.6X254X15.9
C4	HSS254X254X15.9

Structural Framing Schedule

Type Mark	Structural Usage	Type
B1	Other	W360X51
G1	Girder	W460X74
J1	Joist	20K4
J2	Joist	30K7
K1	Vertical Bracing	C230X19.9

Door Schedule

Mark	Height	Width	Comments
D100A	2200	1800	Double Door
D100B	2200	900	
D100C	3000	2400	Overhead Door
D100D	3000	2400	Overhead Door
D100E	3000	2400	Overhead Door
DS101A	2200	900	
DS101B	2200	900	
DS102A	2200	900	
DS102B	2200	900	
DS201	2200	900	
DS202	2200	900	



DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

No.	Revision	Date

PROJECT TITLE:
Refrigerated Food Storage and Distribution Facility

DRAWING TITLE:
Construction Assemblies, Notes, Ledgers and Schedules

SCALE: 1 : 10

DATE: 20 Feb 2025

PROJECT NUMBER: WDIV-W25-01

DRAWN BY: Steven Estafanos

SHEET No.:

A601

2/22/2025 9:31:55 PM