Name of Practice:
Algonquin Centre for Construction Excellence
Architectural Technician Program
ARC8404C - Working Drawings IV
Winter 2025

Name of Project:
Enbridge Gas - Southern Ontario Regional Administration Building

Location:
5881 Clark Ave,
Niagara Falls, ON
L2G 1R7

Submitted by:
Steven Estafanos

Date:
April 11, 2025

Ontario Building Code Data Matrix Part 3

			Building Code Reference [1]
3.00	Building Code Version:	O. Reg. 332/12 — Last Amendment: O. Reg. 89/23	
3.01	Project Type:	☒ New Construction ☐ Addition ☐ Renovation ☐ Change of use ☐ Addition and renovation Description:	[A] 1.1.2.2.
3.02	Major Occupancy Classification:	Occupancy — Use F2 — Basement Garage A2 — Ground Floor Commercial D — 2nd-9th storey offices	3.1.2.
3.03	Superimposed Major Occupancies:	☐ No ☐ Yes Description:	3.2.2.7.
3.04	Building Area (m^2)	Description: — Existing — New — Total 1133 sqm per floor (9 floors) — 0 — 10197 — 10197 0 — 0 — 0 0 — 0 — 0 0 — 0 — 0 Insert additional lines as needed Total — 0 — 10197 — 10197	[A] 1.4.1.2.

3.05	Gross Area (m^2)	Description:	Existing	New	Total	[A] 1.4.1.2.
		Building Area minus shafts	0	9996	9996	
			0	0	0	
			0	0	0	
		Insert additional lines as needed	0	0	0	
		Total	0	9996	9996	
3.06	Mezzanine Area (m^2)	Description:	Existing	New	Total	3.2.1.1.
		None	0	0	0	
			0	0	0	
			0	0	0	
		Insert additional lines as needed	0	0	0	
		Total	0	0	0	
3.07	Building Height	9 Storeys above grade — 39.3 (m) Above grade 0 Storeys below grade				[A] 1.4.1.2. & 3.2.1.1.
3.08	High Building	☐ No ☒ Yes				3.2.6.
3.09	Number of Streets/ Firefighter access	2 street(s)				3.2.2.10. & 3.2.5.
3.10	Building Classification: (Size & Construction Relative to Occupancy)	3.2.2.49 — Group/Div D – any height, any area				3.2.2.20 - 83.
3.11	Sprinkler System	☒ Required ☐ Not Required Provided: ☒ entire building ☐ selected compartments ☐ selected floor areas ☐ basement ☐ in lieu of roof rating ☐ none Description:				3.2.1.5. & 3.2.2.17., 3.2.2.18., 3.2.4.8. to 3.2.4.10., and 3.2.5.13
3.12	Standpipe System	☐ Not required ☒ Required				3.2.9.
3.13	Fire Alarm System	☒ Required ☐ Not required Type Provided: ☐ Single stage ☐ Two stage ☐ None				3.2.4.
3.14	Water Service / Supply Is Adequate	☐ No ☒ Yes				3.2.5.7.

3.15	Construction Type:	Restriction: ☐ Combustible permitted ☒ Non-combustible required ☐ Encapsulated mass timber Actual: ☐ Combustible ☒ Non-combustible ☐ Combination of combustible and non-combustible ☐ Encapsulated mass timber ☐ Combination of encapsulated mass timber and non-combustible Heavy Timber Construction: ☒ No ☐ Yes				3.2.2.20.- 83. & 3.2.1.4.
3.16	Importance Category:	☐ Low ☐ Low human occupancy ☐ Post-disaster shelter ☒ Normal ☐ High ☐ Minor storage building ☐ Explosive or hazardous substances ☐ Post-disaster				4.1.2.1.(3) & T4.1.2.1.B
3.17	Seismic Hazard Index:	(I_E Fa Sa (0.2)) = 0 Seismic design required for Table 4.1.8.18. items 6 to 21: ((I_E Fa Sa (0.2)) ≥ 0.35 or Post-disaster) ☐ No ☐ Yes				4.1.2.1.(3) 4.1.8.18.(1)
3.18	Occupant Load	Floor Level/Area — Occupancy Type — Based On — Occupant Load (Persons) — Posted Limit Required				3.1.17. and 3.1.17.1.(2)
		1136 — D — 3 — 9.3				
		Basement/1133 — F2 — 4.6 — 25				
		Ground/932 — A2 — 3.7 — 251				
	Insert additional lines as needed	2-9/1133 — D — 9.3 — 129				
3.19	Barrier-free Design:	☒ Yes ☐ No				3.8.
	Barrier-free Entrances:	2 — No ramps provided at any entrances				3.1.8.2.
3.20	Hazardous Substances:	☐ Yes ☒ No				3.3.1.2. & 3.3.1.19.


Sheet List

Sheet#	Sheet Name
A100	Cover
A101	Garage Plan
A102	Level 1 Plan
A103	Level 4 Plan
A201	Building Section
A301	Project North Elevation
A302	Project South Elevation
A303	Project East & West Elevations
A401	Precast Panel Section Details
A402	Curtain Wall & Metal Cladding Core Extension Section Details
A403	Plan Details
A501	Stairs
A601	Level 4 Reflected Ceiling Plan
A701	Bathroom Plan
A702	Bathroom Elevations
A801	Wall, Floor & Roof Assemblies

3.21	Required Fire Resistance Ratings	Horizontal Assembly — Rating (H) — Supporting Assembly (H) — Noncombustible in lieu of rating?				3.2.2.20 - 83., 3.2.1.2, 3.2.1.4., 3.2.2.15.
		Storeys below grade — 2 — 2 — ☒ No ☐ Yes ☒ N/A				
		Floors over basement — 2 — 2 — ☒ No ☐ Yes ☒ N/A				
		Floors — 2 — 2 — ☒ No ☐ Yes ☐ N/A				
		Mezzanine — - — - — ☐ No ☐ Yes ☒ N/A				
		Roof — 2 — 2 — ☒ No ☐ Yes ☒ N/A				
3.22a	Spatial Separation	Exposing Building Face — EBF Area (m²) — L.D. (m) — L/H or H/L — Required FRR (H) — % Unprotected Openings Permitted — % Unprotected Openings Provided				3.2.3.
		0 — 0 — 0 — 0				
		0 — 0 — 0 — 0				
		0 — 0 — 0 — 0				
	Insert additional lines as needed	0 — 0 — 0 — 0				
3.22b	Spatial Separation Continued	EBF (repeated) — Construction Type — Cladding Type				
		☐ Noncombustible				
		☐ Noncombustible				
	Insert additional lines as needed	☐ Noncombustible				
		☐ Noncombustible				
3.23a	Plumbing Fixture Requirements*	Ratio: Male:Female = 50:50 Except as noted otherwise				3.7.4., 3.8.2.3.
		Floor Level/Area — Occupant Load — OBC Reference — WCs Required — WCs Provided				
		Fourth/1133 — 14 — 3.7.4.2.(1) — 3/sex — 6/sex				
		0 — 0 — 0				
	Insert additional lines as needed	0 — 0 — 0				
		0 — 0 — 0				

3.23b	Plumbing Fixture Requirements continued:	Floor Level/Area (repeated) — Barrier-free WCs Required — Barrier-free WCs Provided — Universal Washrooms Required — Universal Washrooms Provided				Tables 3.8.2.3.A and 3.8.2.3.B
		0 — 0 — 0 — 2				
		0 — 0 — 0 — 0				
	Insert additional lines as needed	0 — 0 — 0 — 0				
		0 — 0 — 0 — 0				
3.24	Energy Efficiency:	Compliance Path: Climate Zone: Degree Days Below 18 C:				12.2.1.2 SB-1 Table 2
3.25	Sound Transmission Design:	Is there more than 1 dwelling unit per building: ☐ Yes ☒ No Option Implemented: Notes:				SB-3, 5.6.1.2.(2), 5.6.1.4., & 5.6.1.5.
3.25	Notes:	Insert additional lines as needed				

1 *All references are to Division B of the OBC, unless preceded by [A] for Division A and [C] for Division C.*

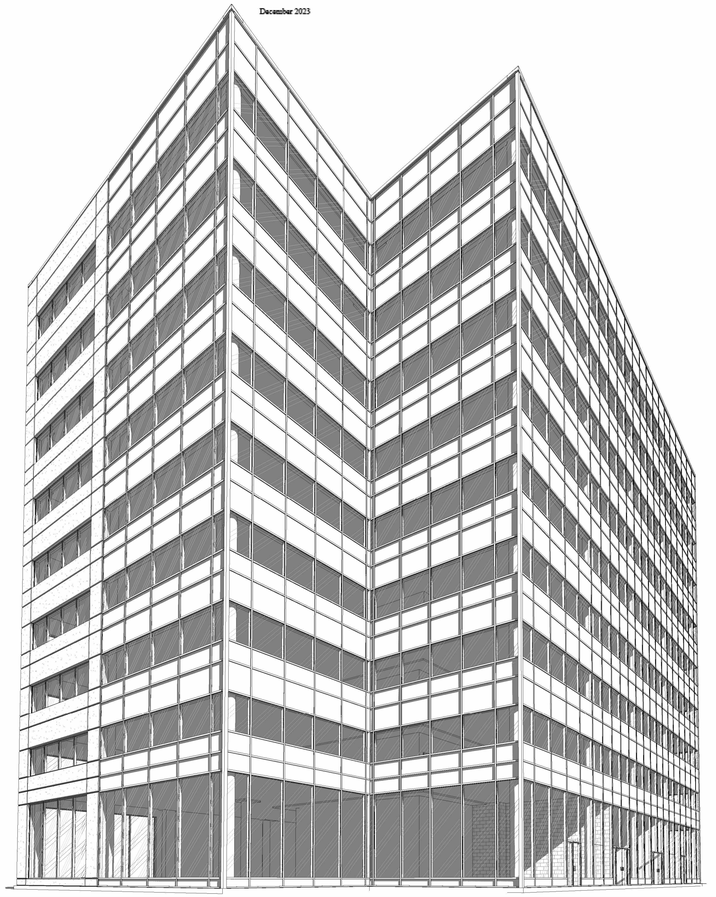

ALGONQUIN COLLEGE

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building


PROJECT NUMBER:
WDIV-W25-02-2.1

PROJECT ADDRESS:
5881 Clark Ave,
Niagara Falls, ON
L2G 1R7

PROGRAM TITLE:
Architectural Technician

STUDENT NAME:	STUDENT NO:
Steven Estafanos	
COURSE: ARC8604	SECTION: 040
SEMESTER: W25	DATE: 11 Apr 2025

4/11/2025 5:51:28 PM

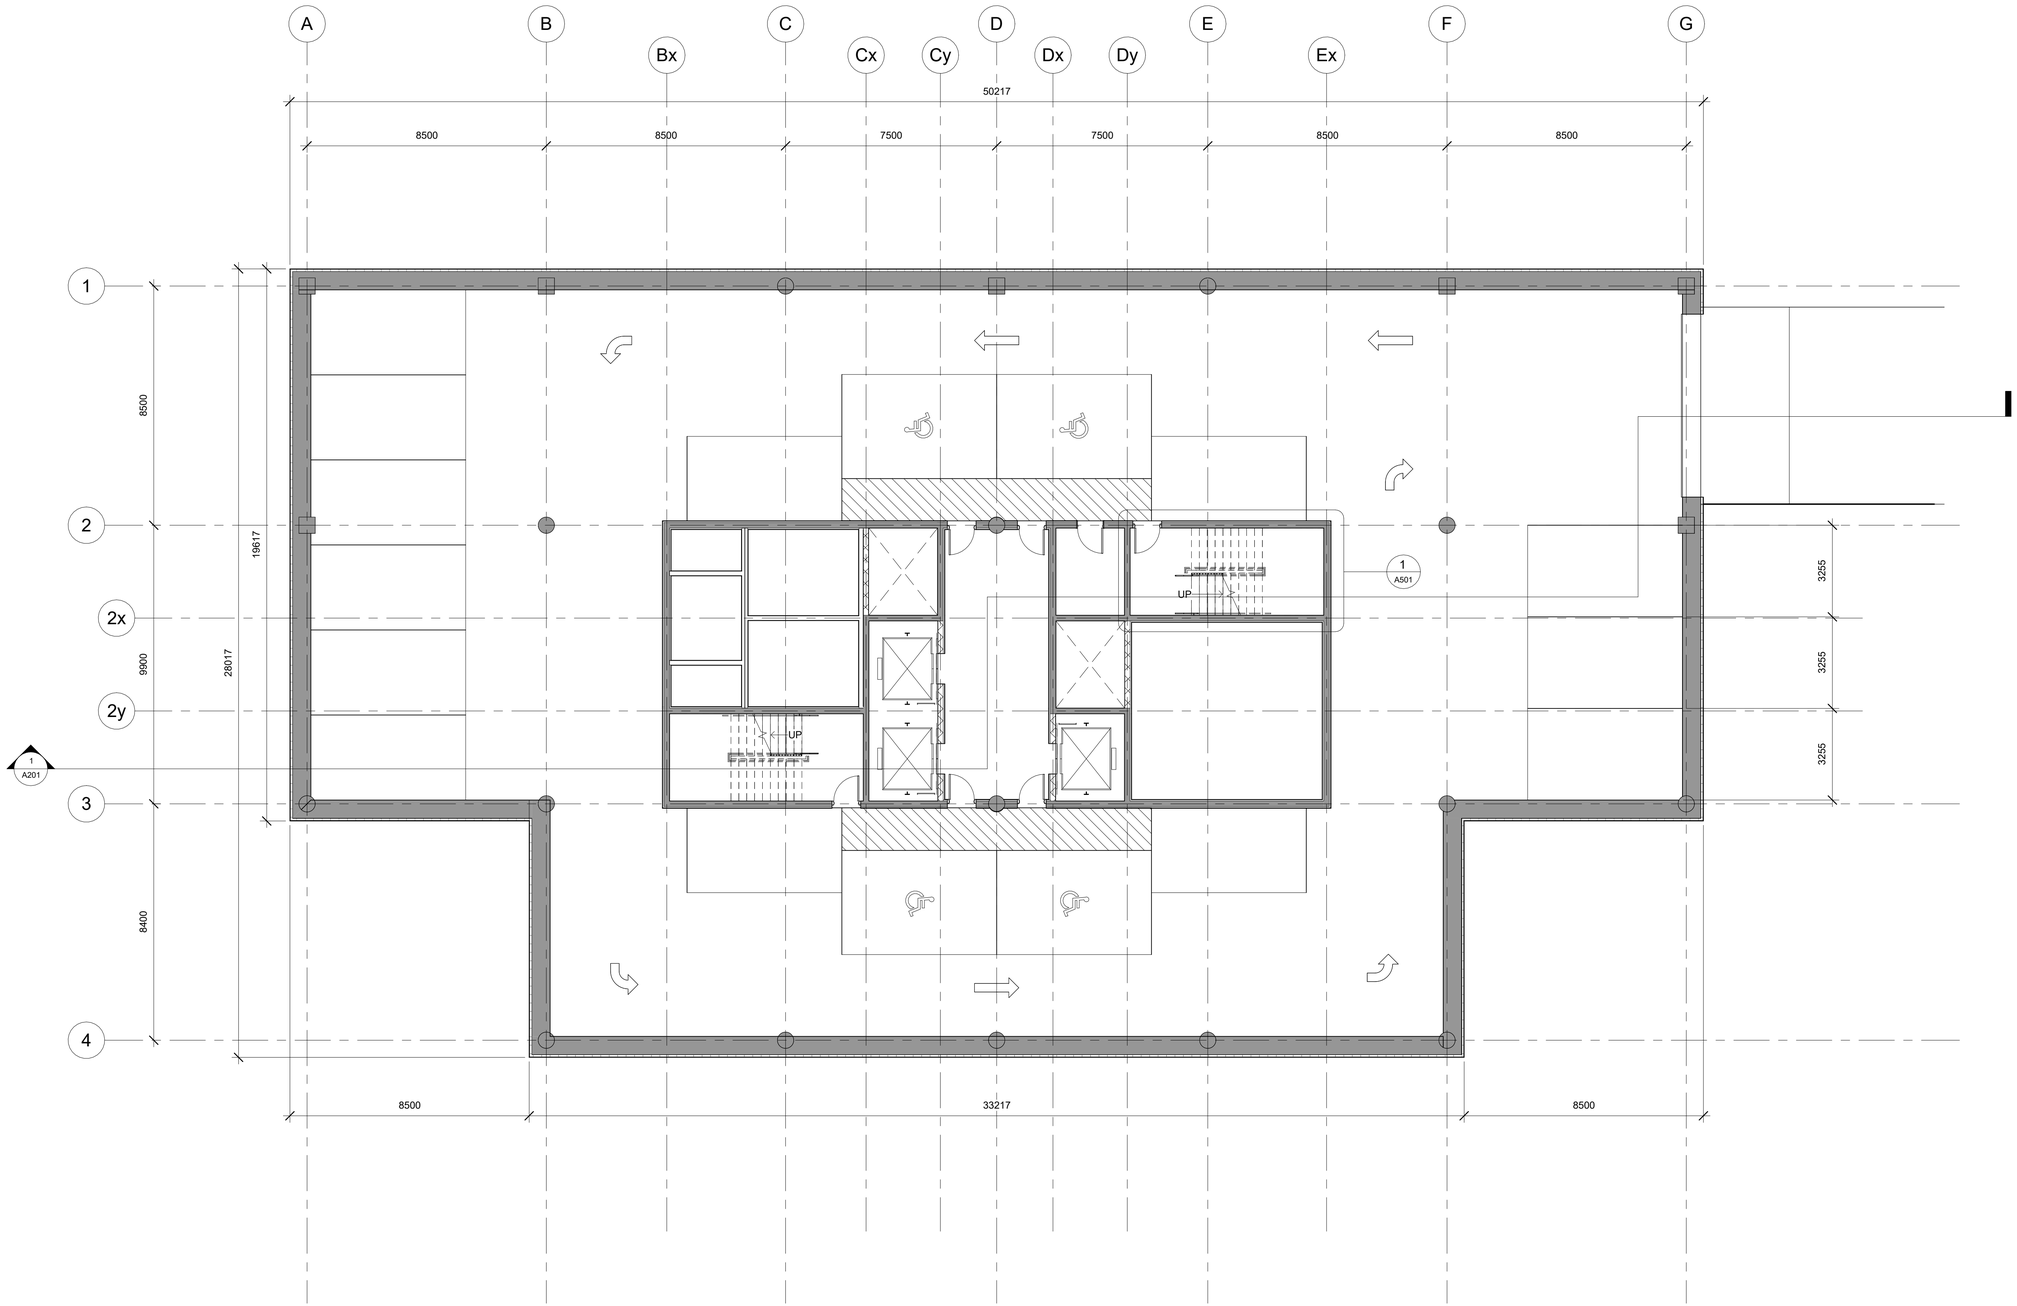

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

Project North

True North

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P1.

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building


DRAWING TITLE:
Garage Plan

SCALE:	DATE:
1 : 100	11 April 2025
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos

SHEET No.:

A101

4/11/2025 5:51:29 PM

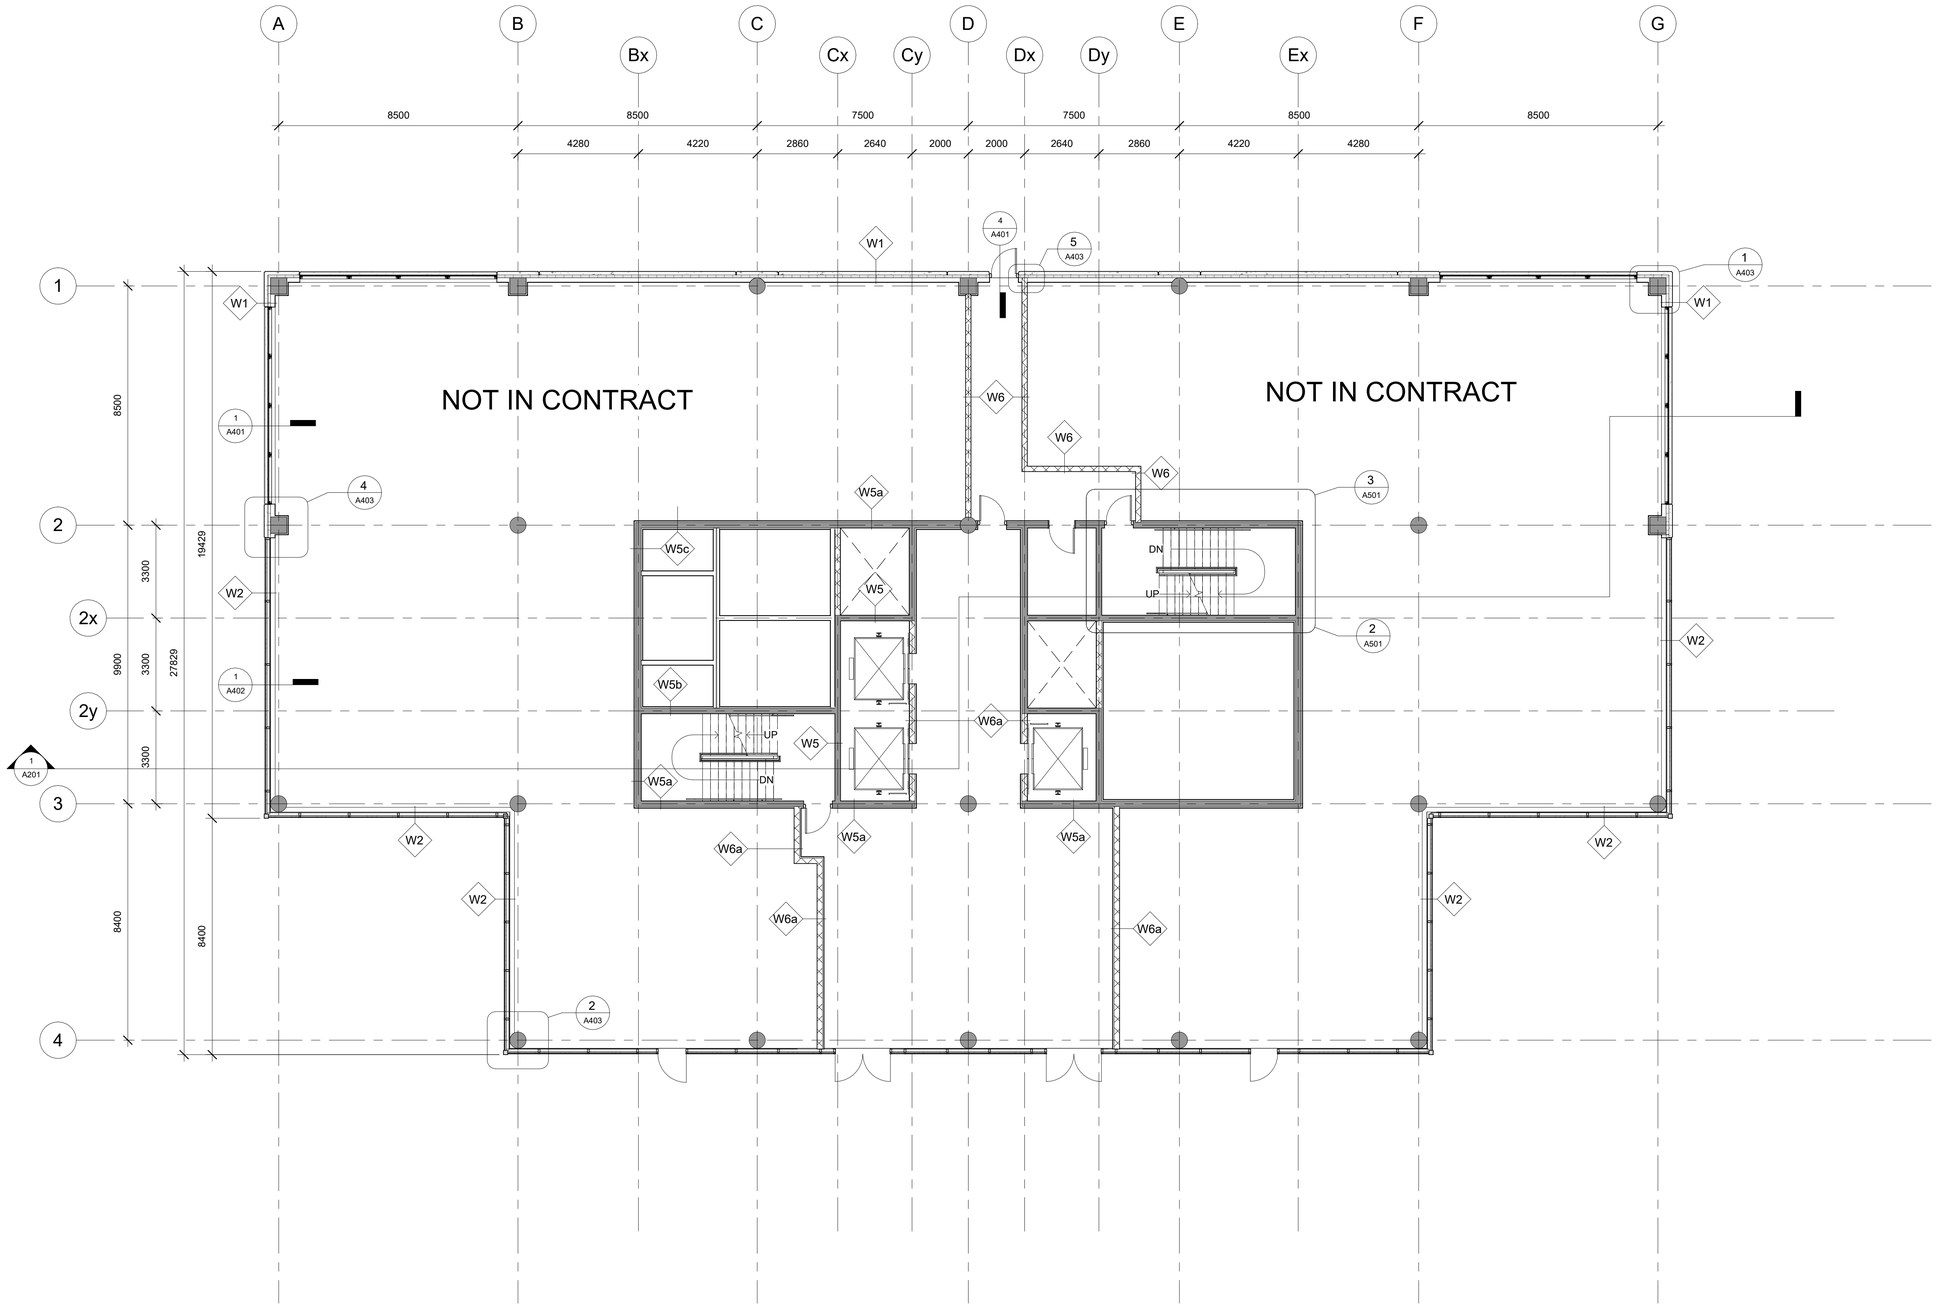

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

Project North

True North

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P1.

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building


DRAWING TITLE:
Level 1 Plan

SCALE:	DATE:
1 : 100	04/10/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos

SHEET No.:

A102

4/11/2025 5:51:32 PM

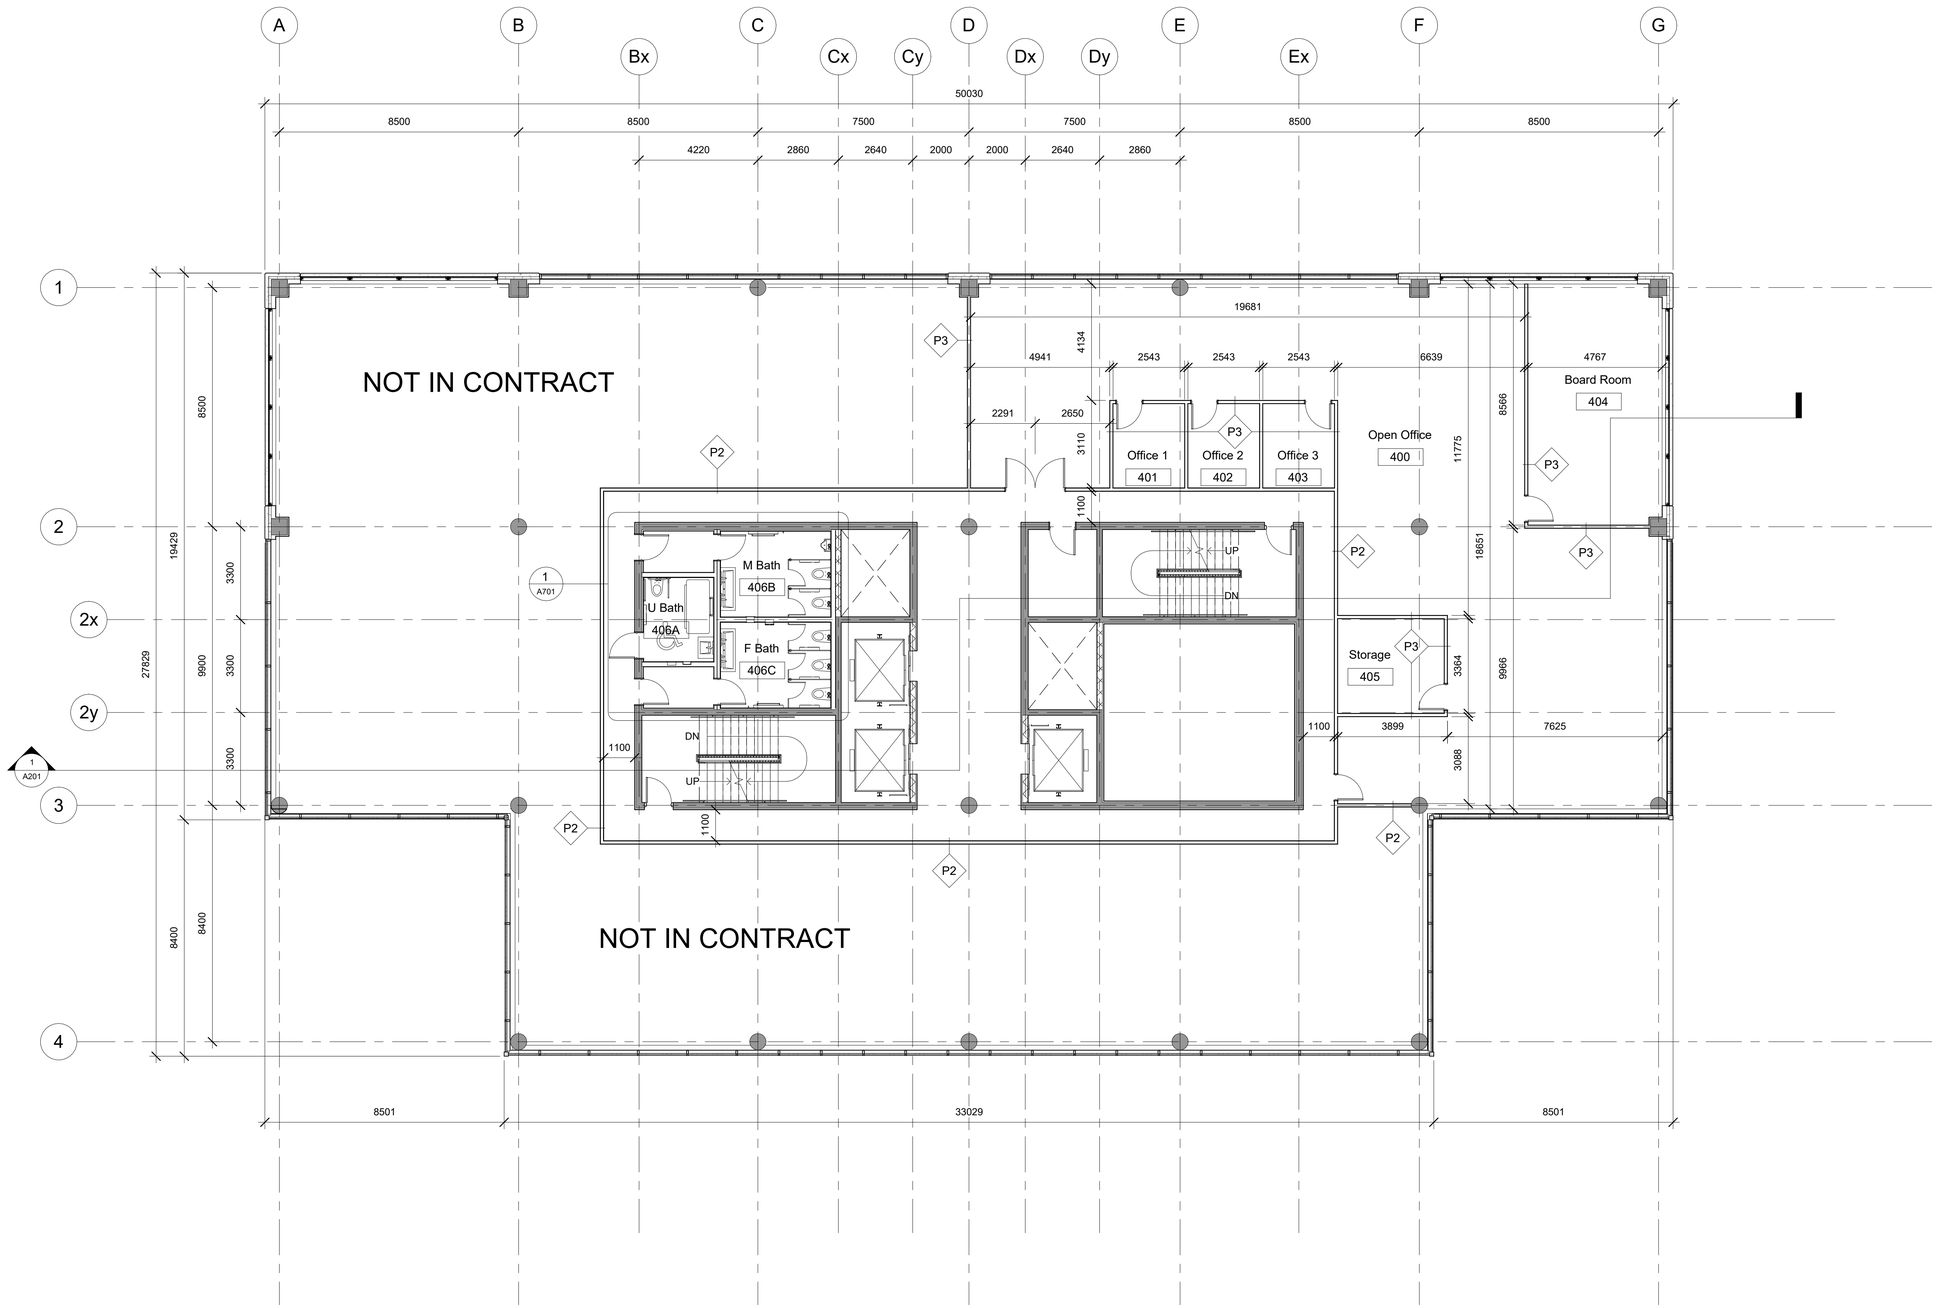

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

Project North

True North

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P1.

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building


DRAWING TITLE:
Level 4 Plan

SCALE:	DATE:
1 : 100	04/10/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos


SHEET No.:

A103

4/11/2025 5:51:37 PM

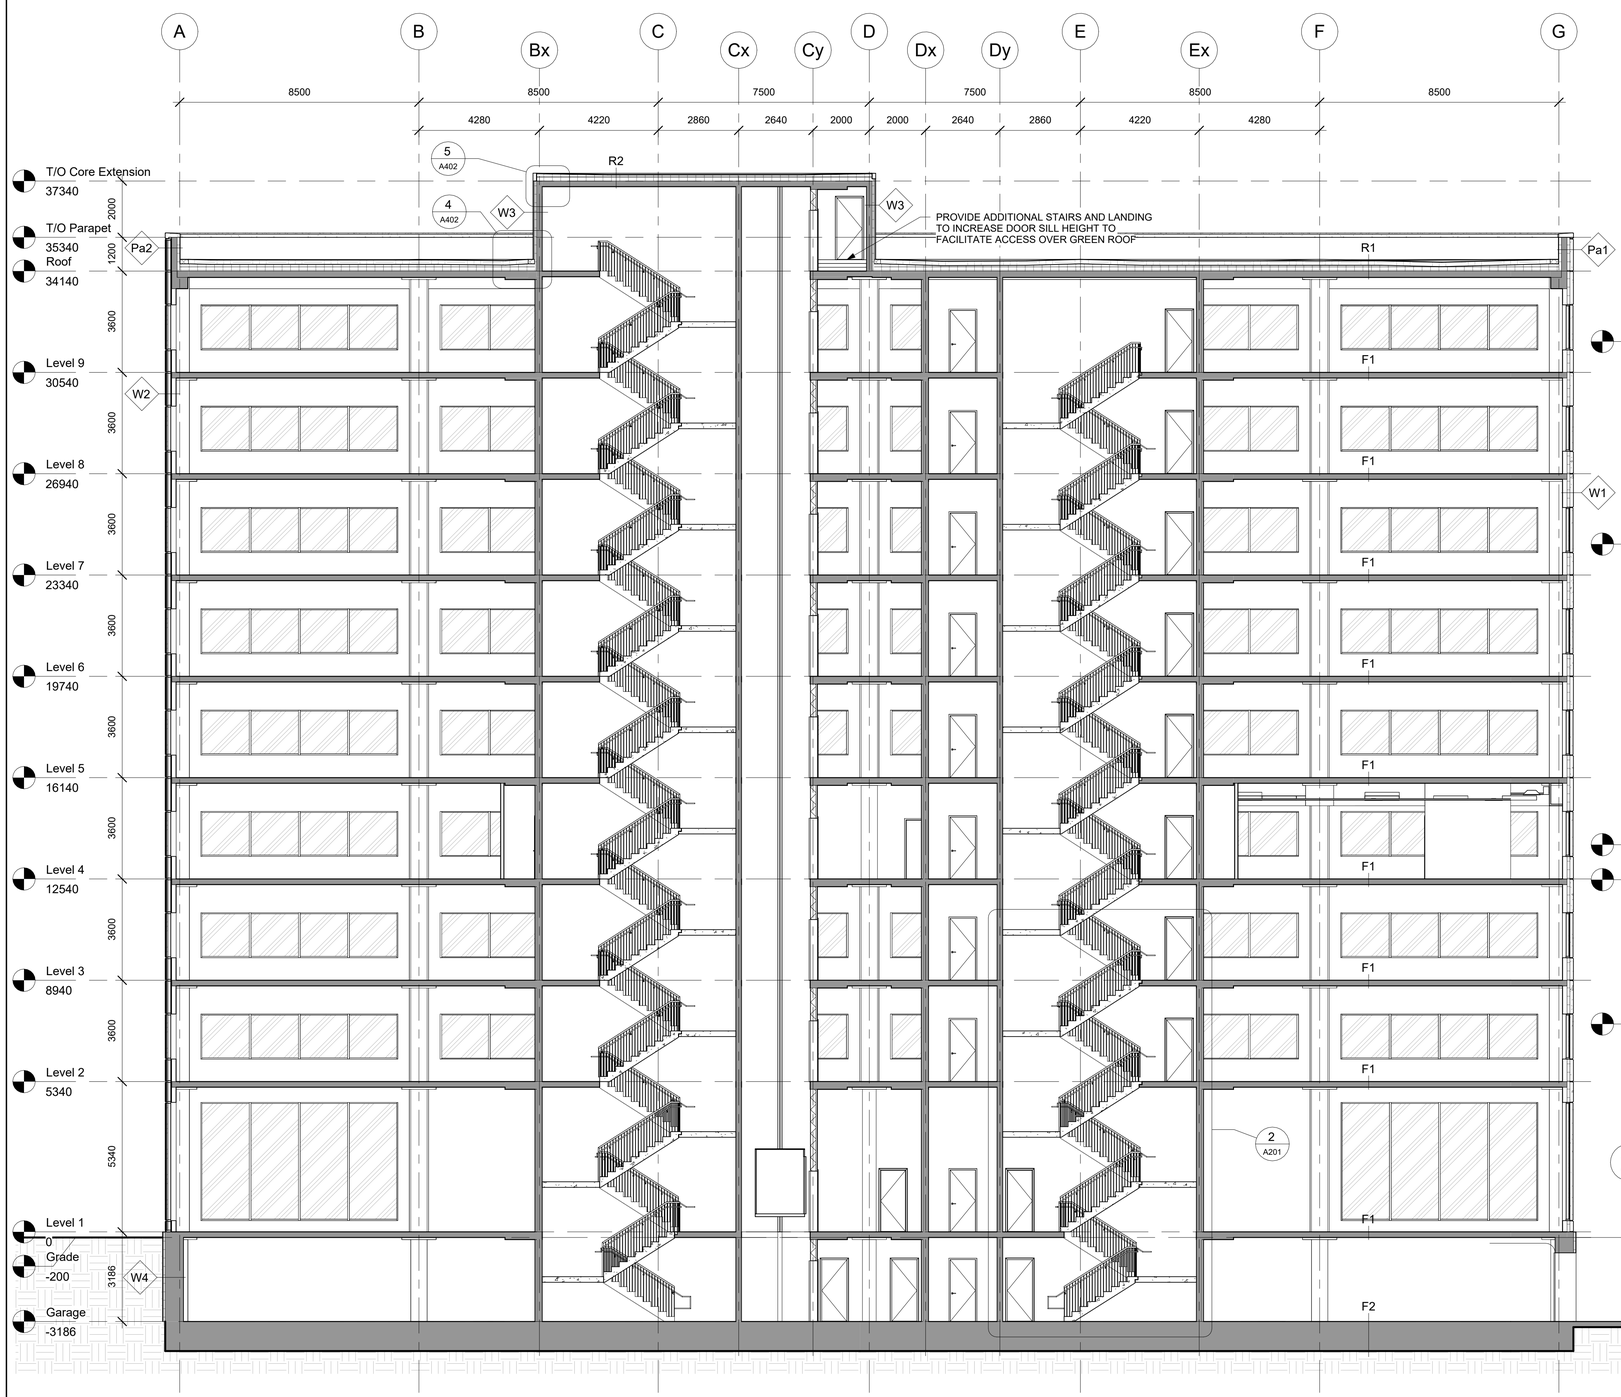

1 Building Section
1 : 100

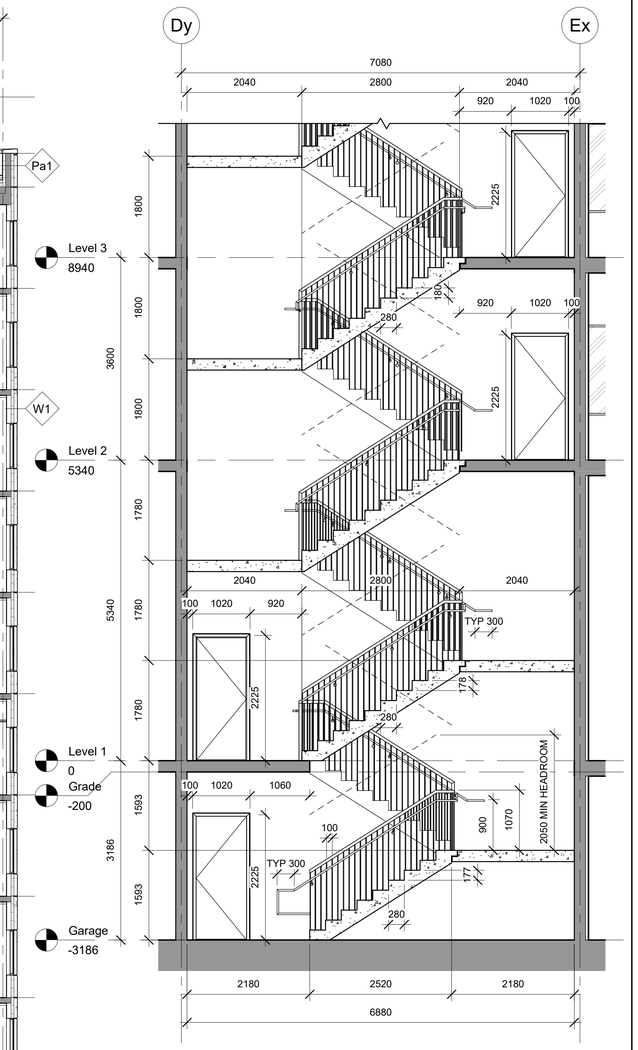

2 Stair Section
1 : 50

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P1.

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building


DRAWING TITLE:
Building Section

SCALE:	DATE:
As indicated	04/10/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos

SHEET No.:

A201

4/11/2025 5:51:45 PM

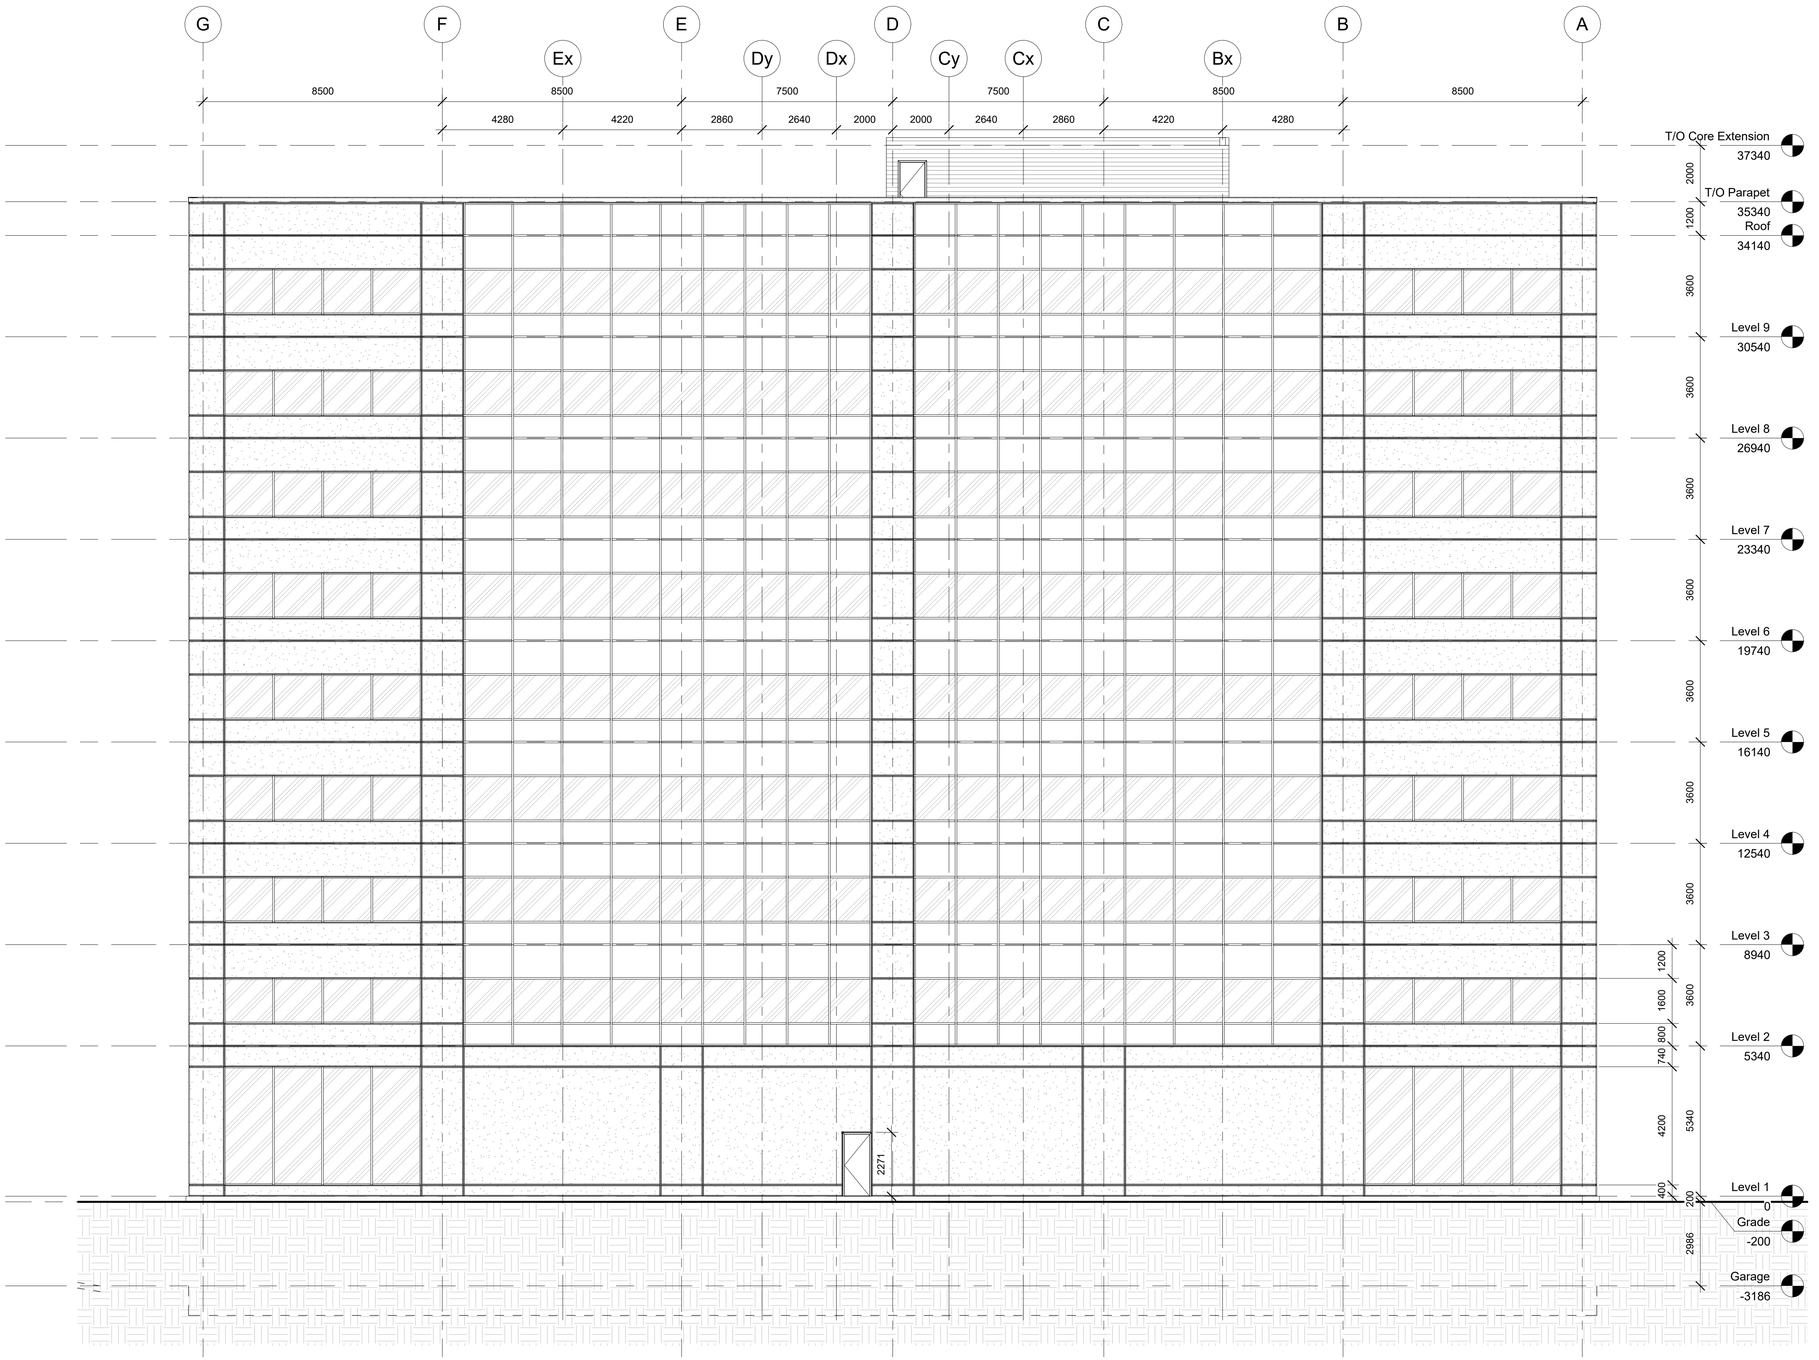

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern
Ontario Regional
Administration Building


DRAWING TITLE:
Project North Elevation

SCALE:	DATE:
1 : 100	04/10/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos

SHEET No.:

A301

4/11/2025 5:52:35 PM

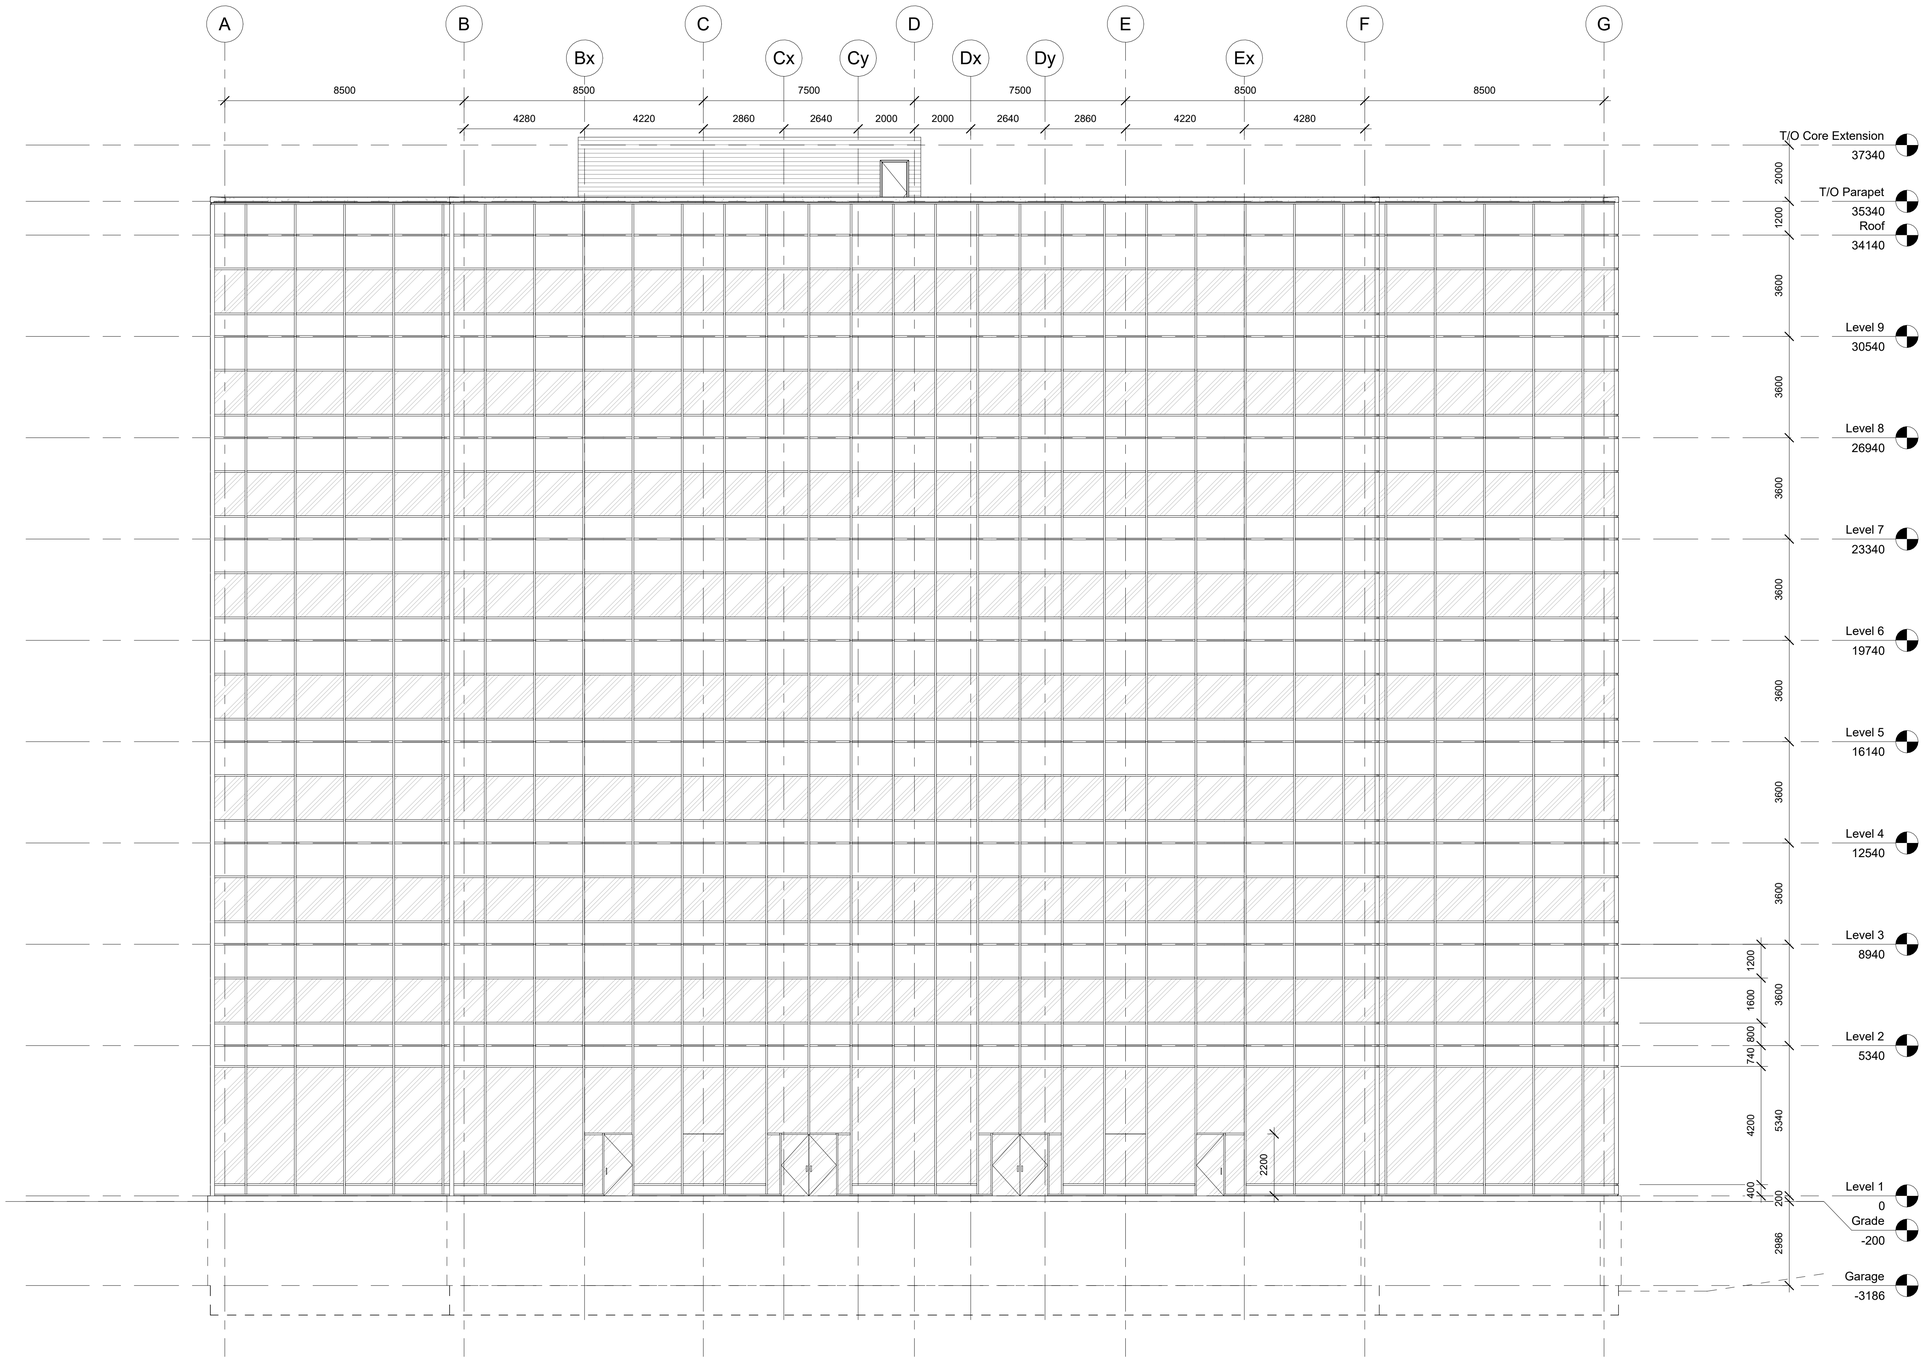



DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern
Ontario Regional
Administration Building


DRAWING TITLE:
Project South Elevation

SCALE:	DATE:
1 : 100	04/10/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos


SHEET No.:

A302

4/11/2025 5:53:11 PM

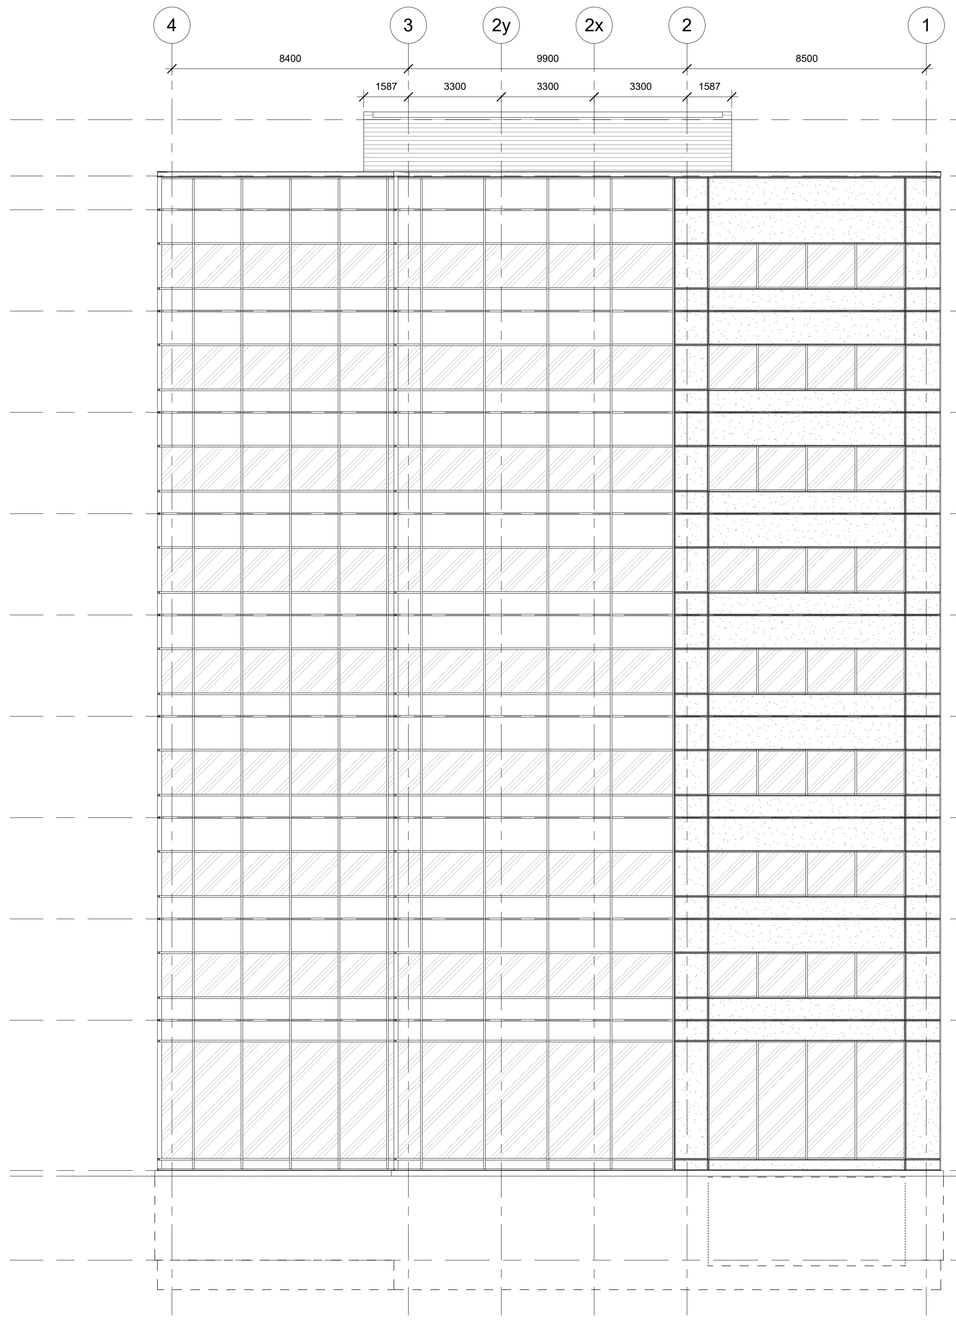

1 East
1 : 100

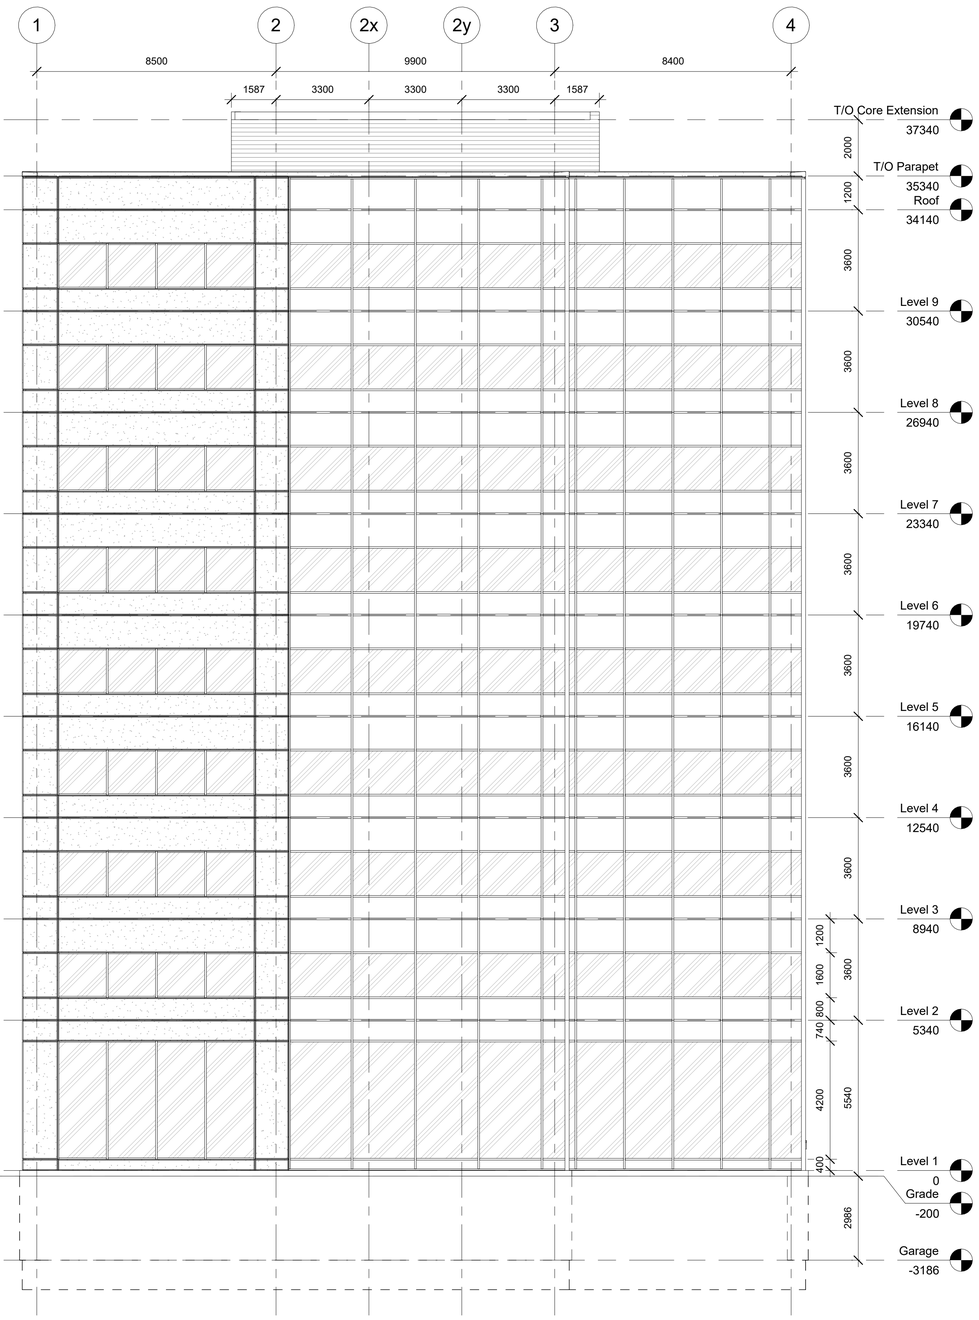

2 West
1 : 100

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building


DRAWING TITLE:
Project East & West Elevations

SCALE:	DATE:
1 : 100	04/11/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos


SHEET No.:

A303


4/11/2025 5:55:37 PM

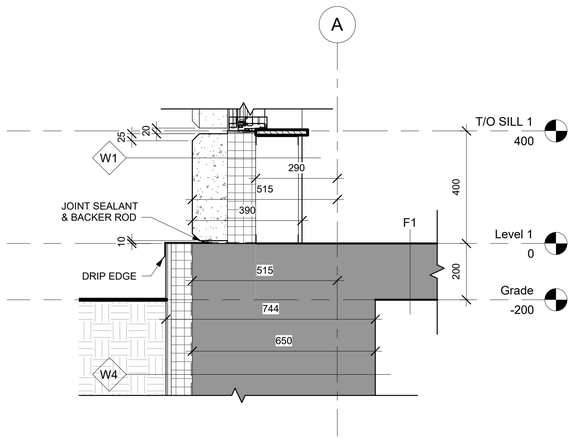


1 Precast Panel @ FDTN
1 : 10

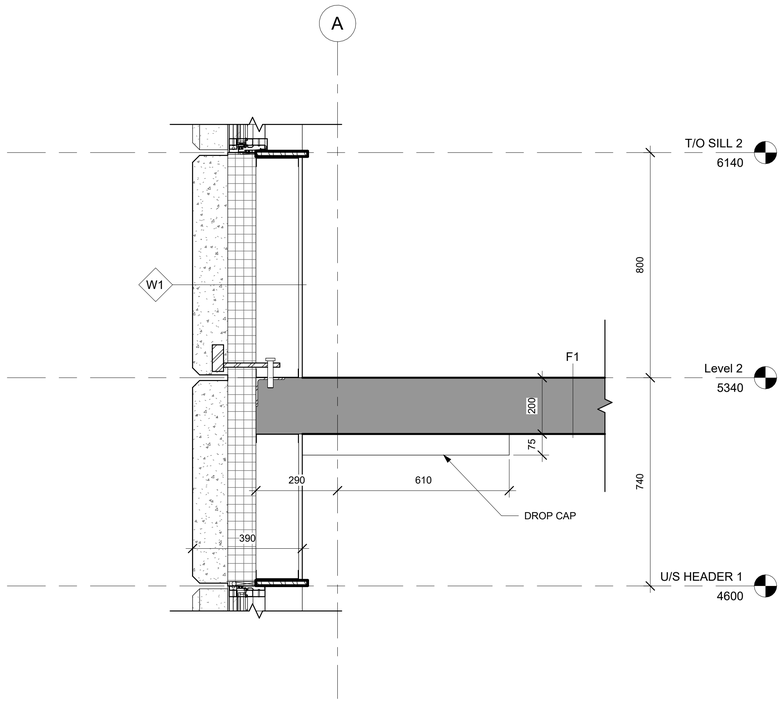

2 Precast Panel @ Level 2
1 : 10

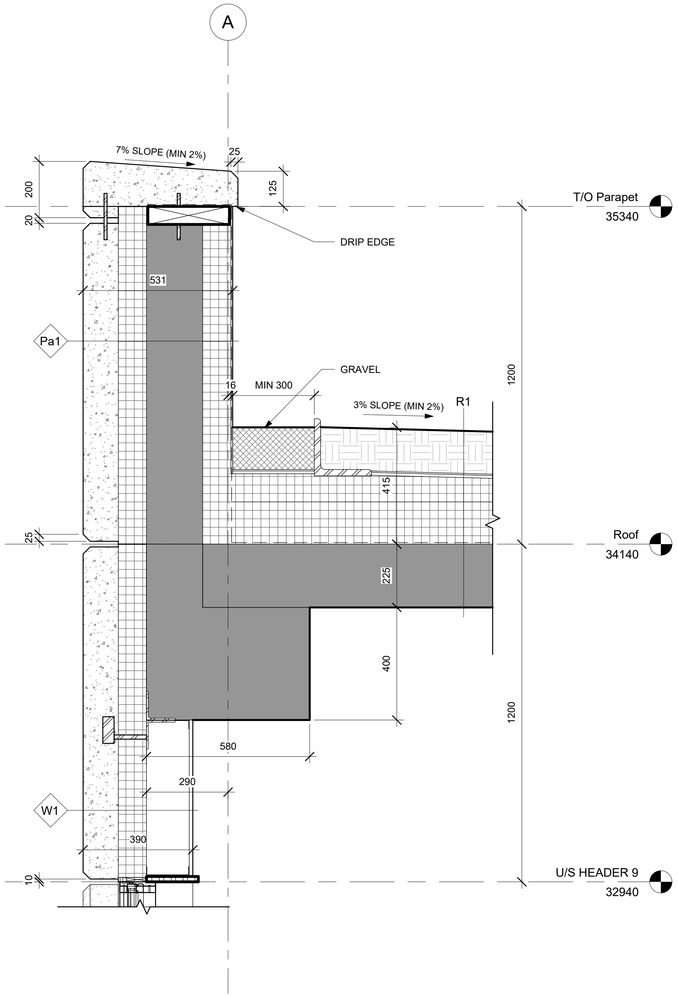

3 Precast Panel @ Roof
1 : 10

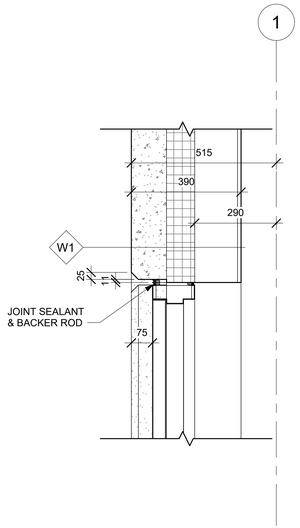

4 Precast Panel @ Door Head
1 : 10



DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern
Ontario Regional
Administration Building


DRAWING TITLE:
Precast Panel Section
Details

SCALE:	DATE:
1 : 10	04/11/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos


SHEET No.:

A401


4/11/2025 5:55:39 PM

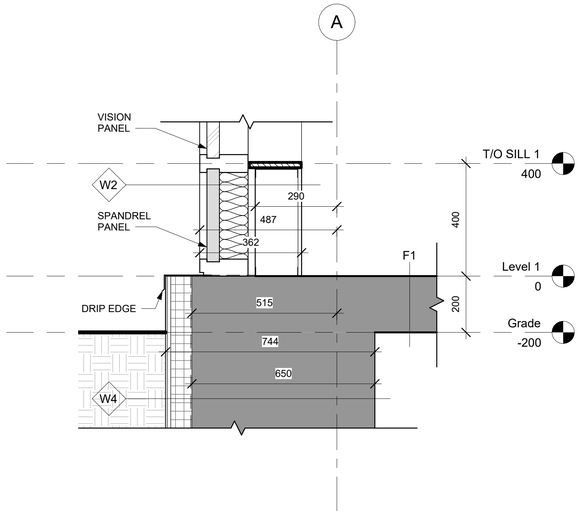


1 Curtain Wall @ FDTN
1 : 10

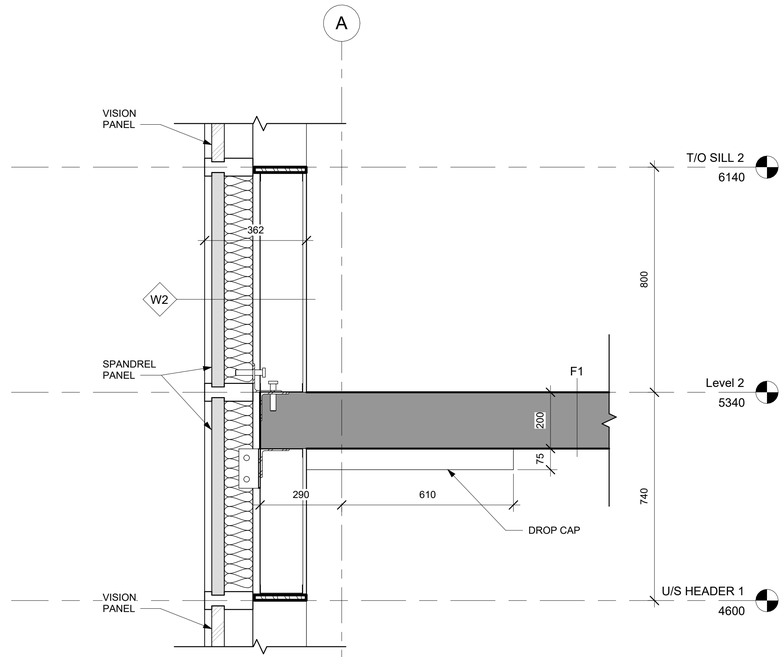


2 Curtain Wall @ Level 2
1 : 10

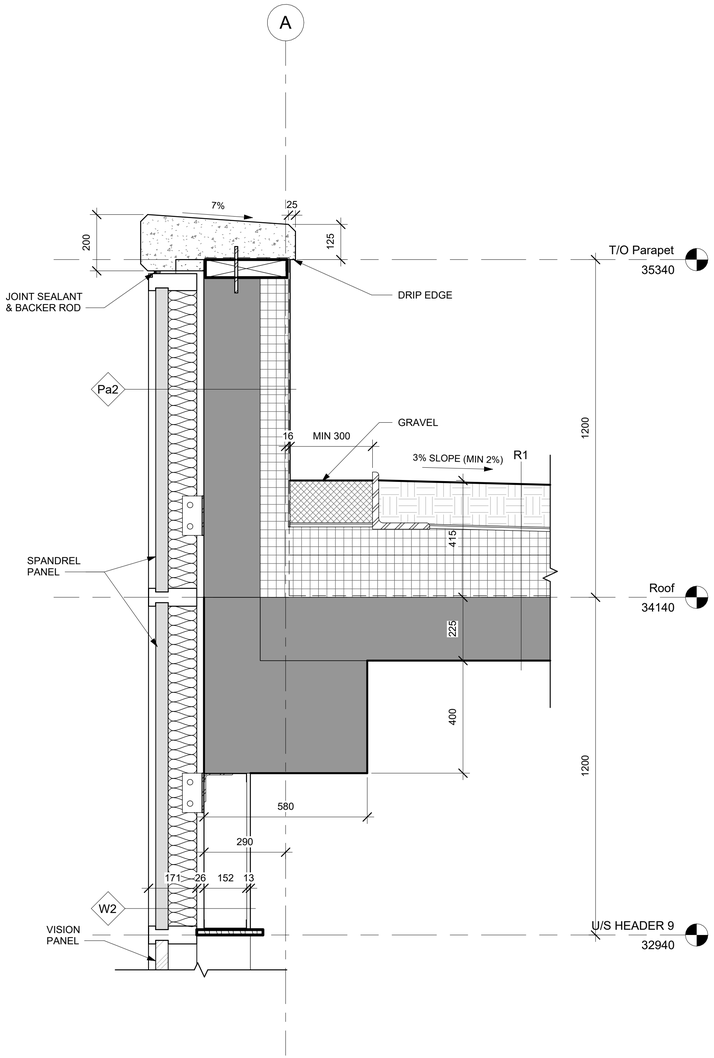

3 Curtain Wall @ Roof
1 : 10

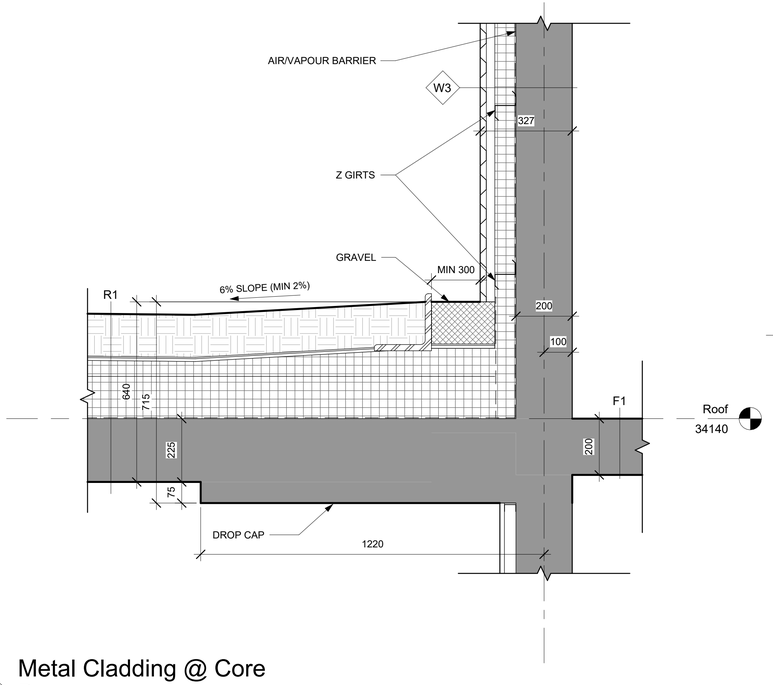

4 Metal Cladding @ Core Base
1 : 10

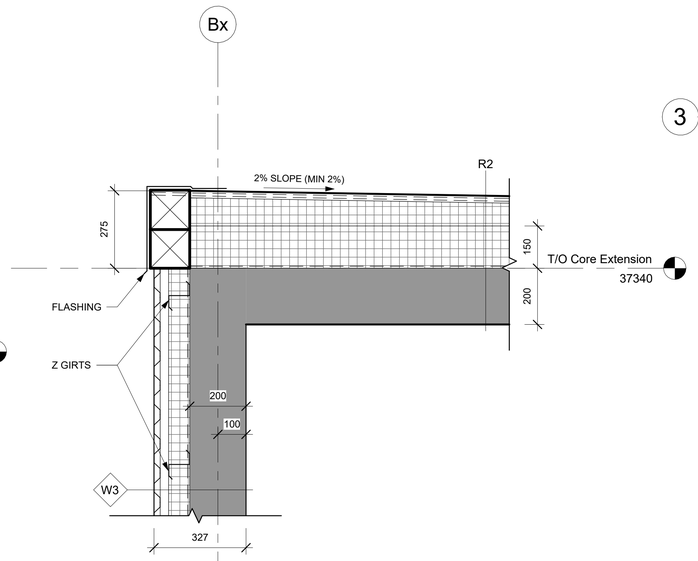

5 Metal Cladding @ Core Terminus
1 : 10

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building


DRAWING TITLE:
Curtain Wall & Metal Cladding Core Extension Section Details

SCALE:	DATE:
1 : 10	04/11/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos


SHEET No.:

A402


4/11/2025 5:55:40 PM

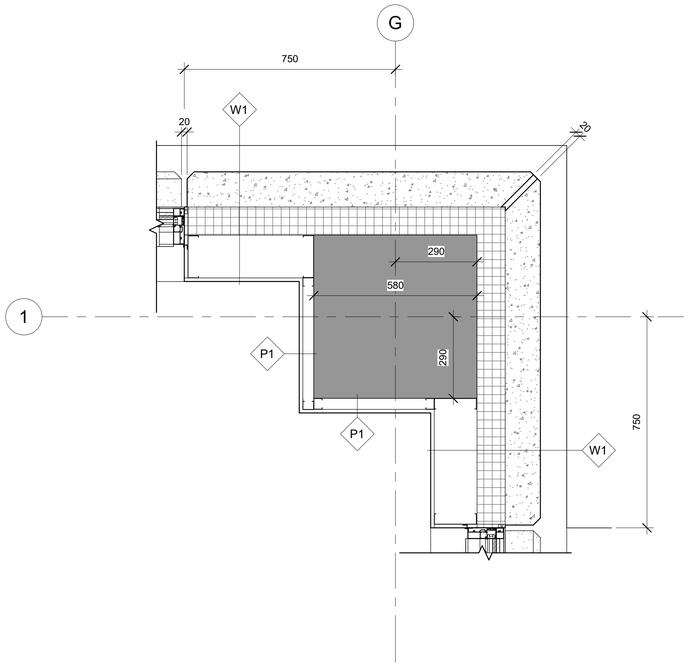


1 Precast Panel @ Corner
1 : 10

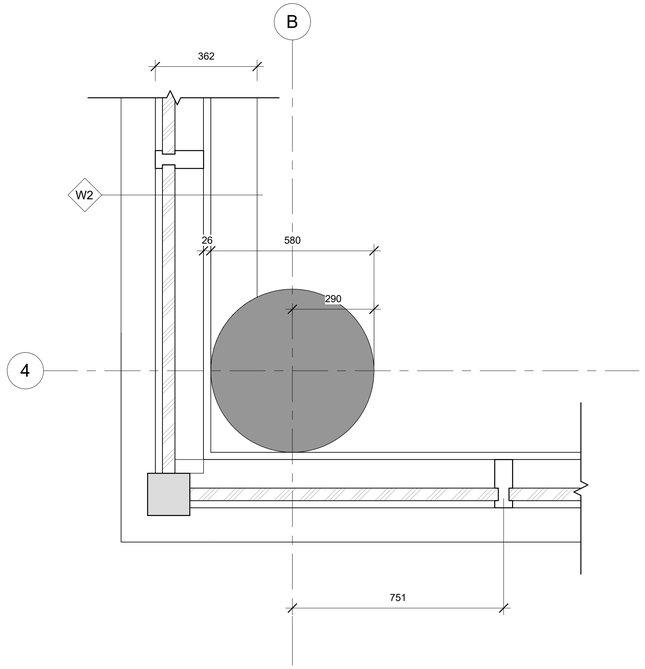


2 Curtain Wall @ Corner
1 : 10

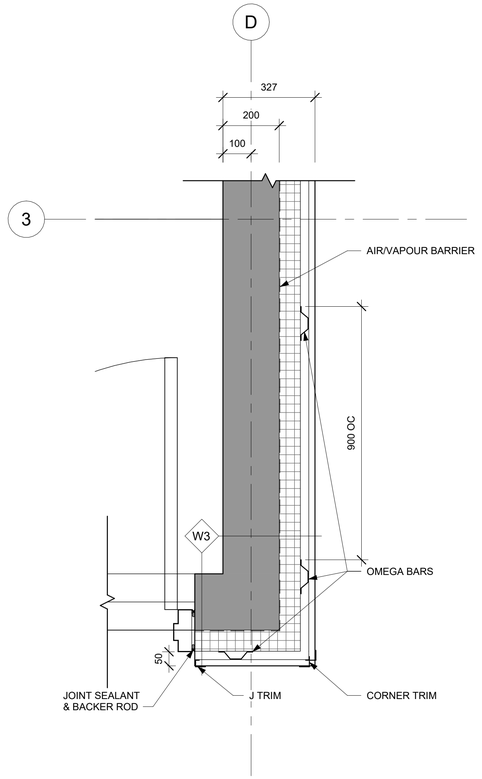

3 Metal Cladding @ Corner
1 : 10

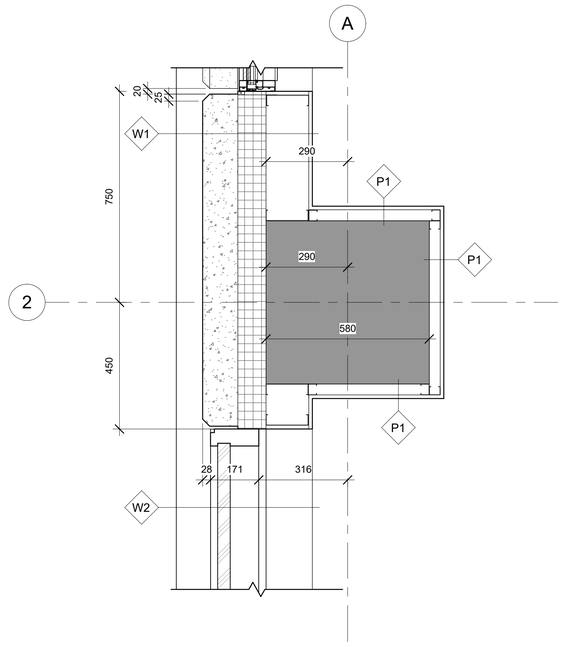

4 Precast Panel @ Curtain Wall
1 : 10

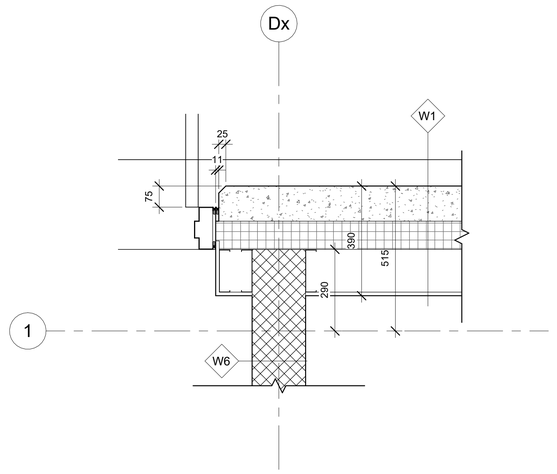

5 Precast Panel @ Door Jamb
1 : 10




DO NOT SCALE DRAWINGS


CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©


Project North


True North

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P1.

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building


DRAWING TITLE:
Plan Details

SCALE:	DATE:
1 : 10	04/11/25
PROJECT NUMBER: WDIV-W25-02-2.1	DRAWN BY: Steven Estafanos


SHEET No.:

A403


4/11/2025 5:55:42 PM

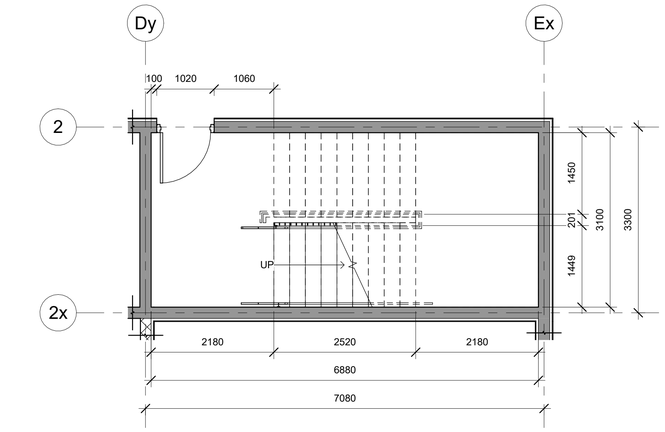


1 Stairs @ Garage
1 : 50

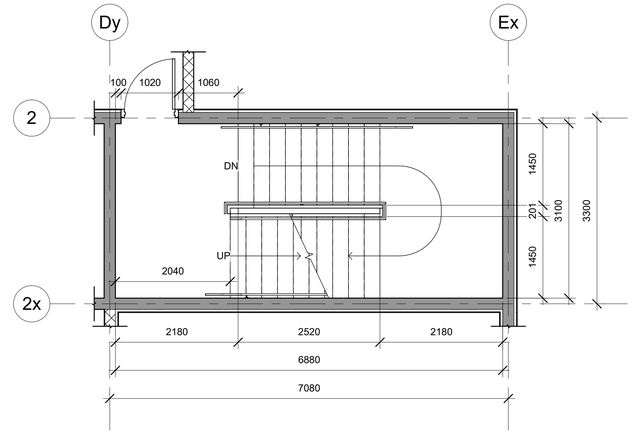

2 Stairs @ Level 1
1 : 50

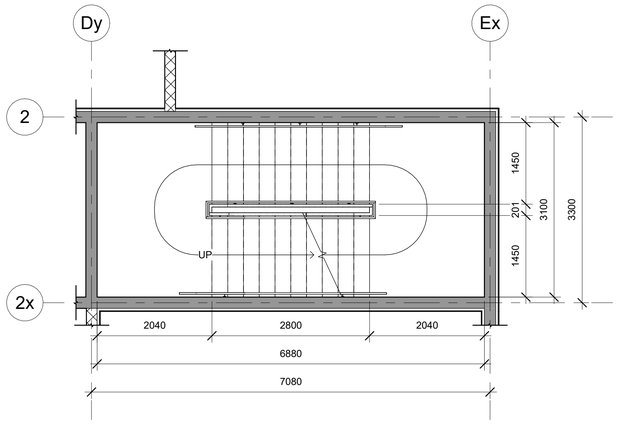

3 Stairs @ Level 1 - Upper
1 : 50

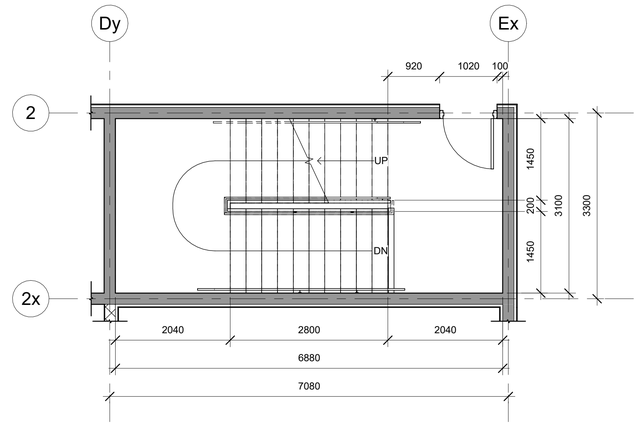

4 Stairs @ Level 2
1 : 50




DO NOT SCALE DRAWINGS


CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©


Project North


True North

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P1.

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern
Ontario Regional
Administration Building


DRAWING TITLE:
Stairs

SCALE:	DATE:
1 : 50	04/11/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos

SHEET No.:

A501

4/11/2025 5:55:43 PM

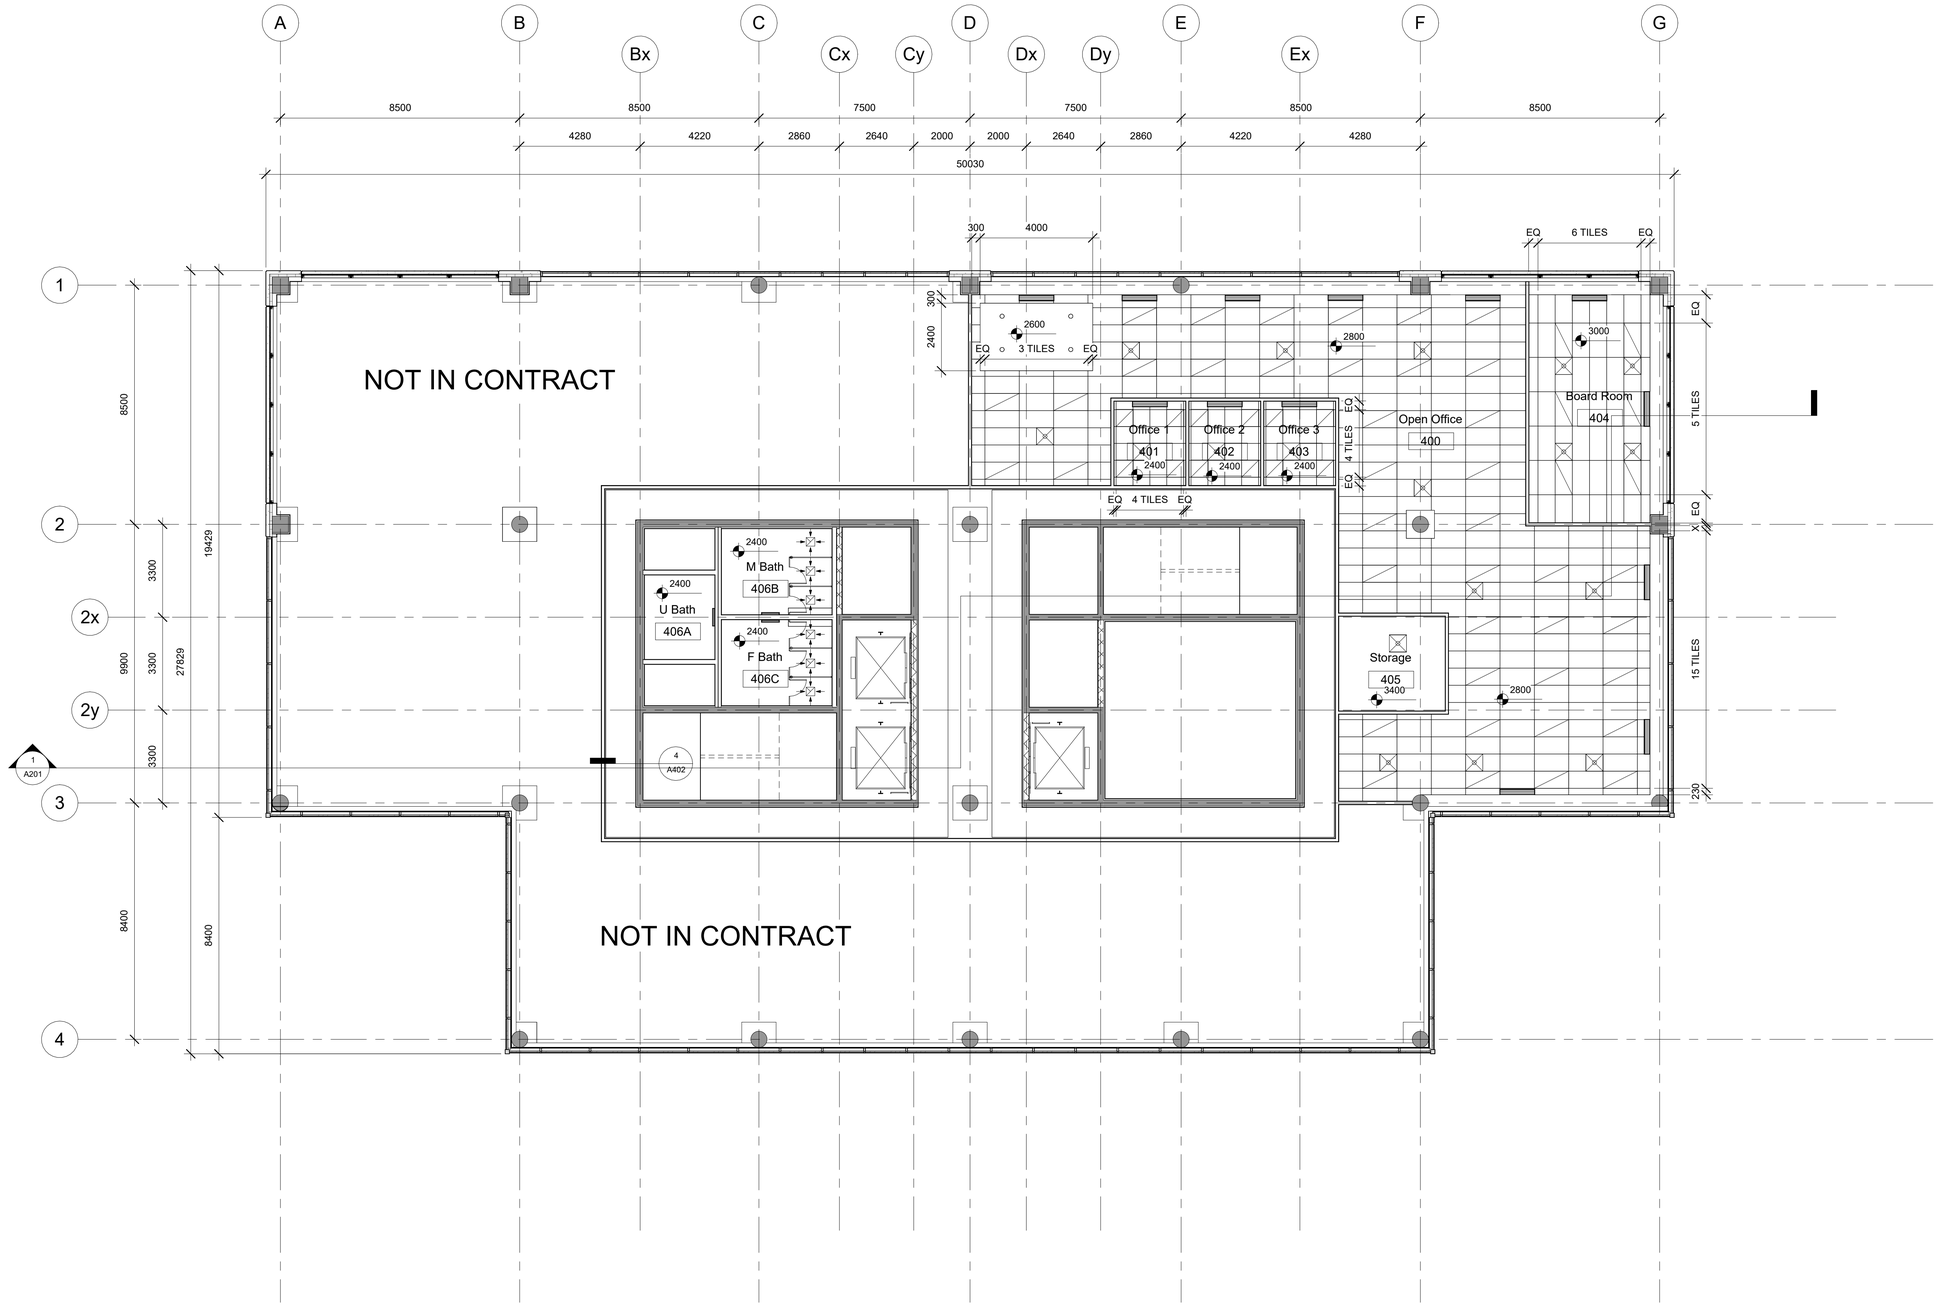

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

Project North

True North

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P1.

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building


DRAWING TITLE:
Level 4 Reflected Ceiling Plan

SCALE:	DATE:
1 : 100	04/11/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos

SHEET No.:

A601

4/11/2025 5:55:48 PM

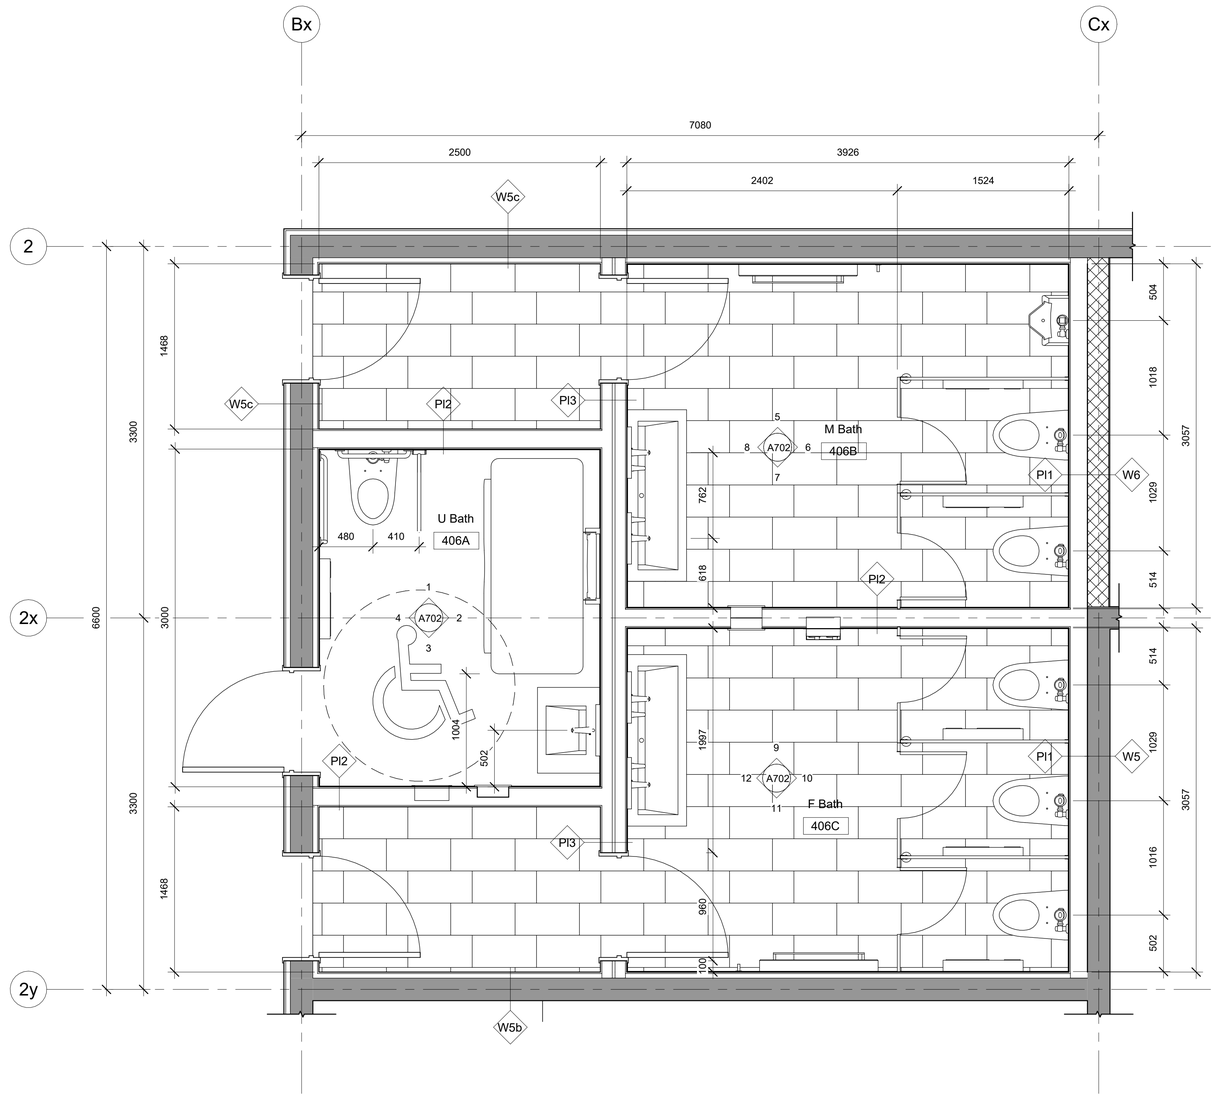

REFER TO DRAWING A-801 FOR CONSTRUCTION ASSEMBLIES, NOTES, LEGENDS, & SCHEDULES

UNLESS OTHERWISE SPECIFIED, ALL COLUMN WRAPPING WALLS ARE TYPE P1.

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

Project North

True North

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern
Ontario Regional
Administration Building

DRAWING TITLE:
Bathroom Plan

SCALE: 1 : 25

DATE: 04/11/25


PROJECT NUMBER: WDIV-W25-02-2.1

DRAWN BY: Steven Estafanos


SHEET No.:

A701


4/11/2025 5:55:50 PM

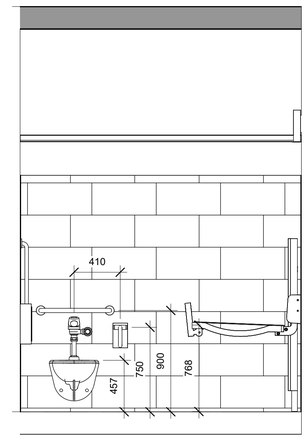


1 U Bath N Elev
1 : 25

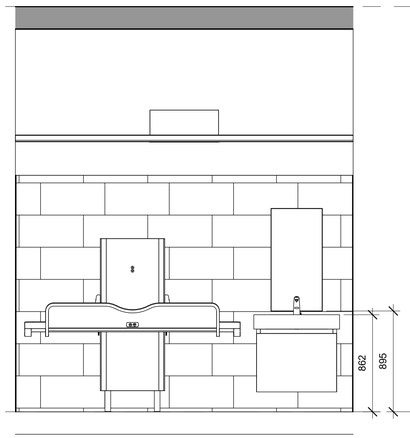


2 U Bath E Elev
1 : 25

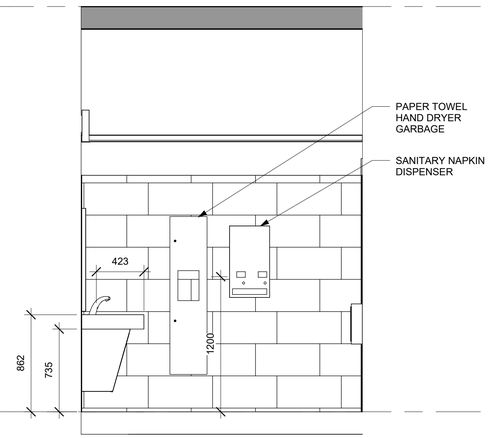


3 U Bath S Elev
1 : 25

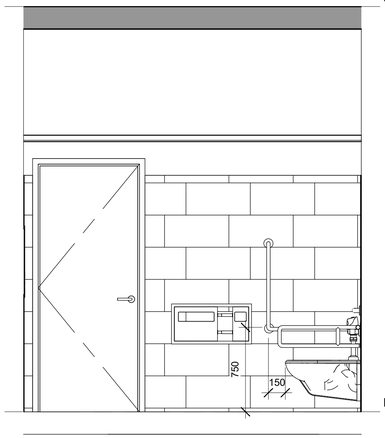


4 U Bath W Elev
1 : 25

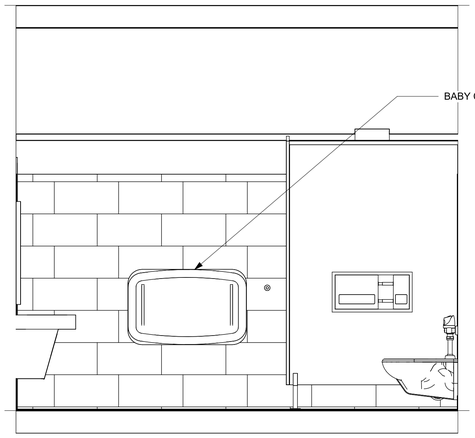


5 M Bath N Elev
1 : 25

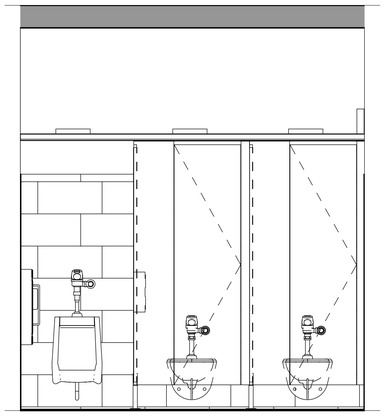


6 M Bath E Elev
1 : 25

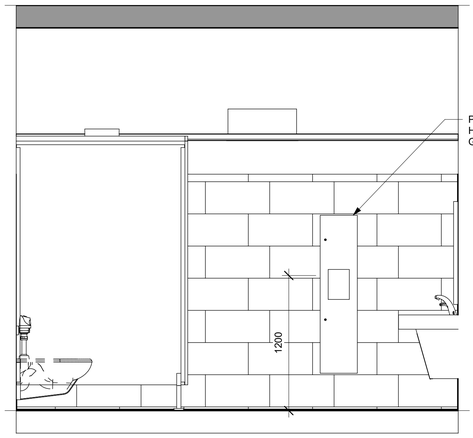


7 M Bath S Elev
1 : 25

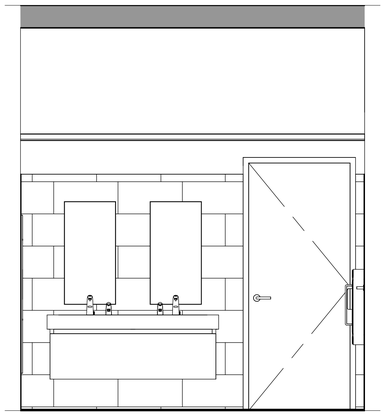


8 M Bath W Elev
1 : 25

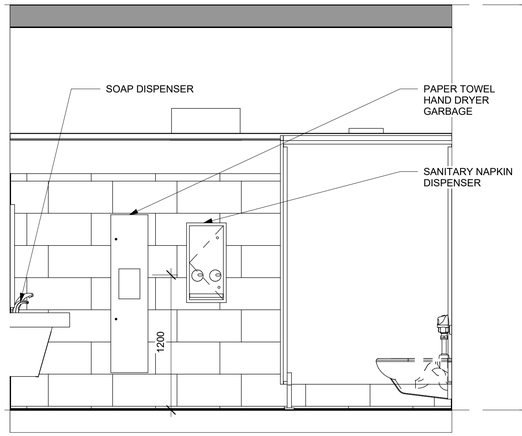


9 F Bath N Elev
1 : 25

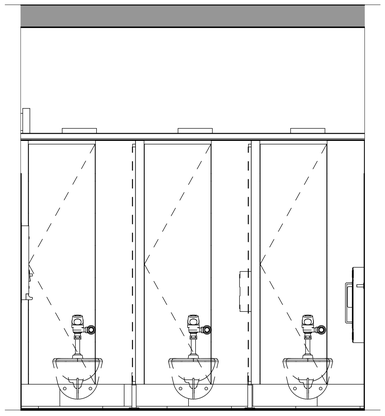

10 F Bath E Elev
1 : 25

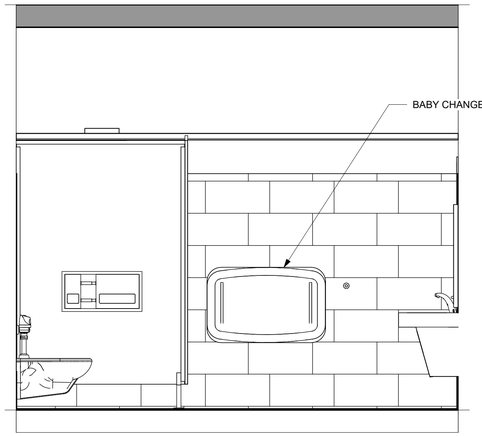

11 F Bath S Elev
1 : 25

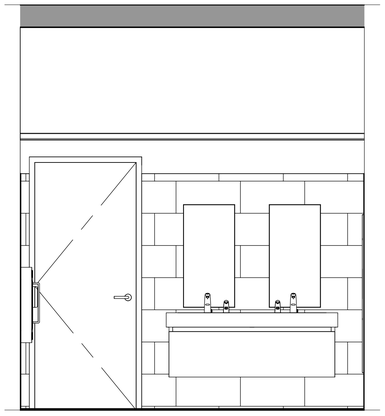

12 F Bath W Elev
1 : 25

DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern Ontario Regional Administration Building

DRAWING TITLE:
Bathroom Elevations


SCALE:	DATE:
1 : 25	04/11/25
PROJECT NUMBER:	DRAWN BY:
WDIV-W25-02-2.1	Steven Estafanos

SHEET No.:

A702


4/11/2025 5:55:55 PM

W1

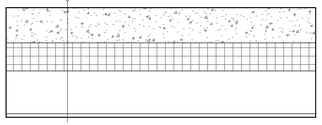


W1:
125 ARCHITECTURAL PRECAST PANEL
100 ROCKWOOL CAVITYROCK SEMI-RIGID INSULATION
152 LIGHTWEIGHT STEEL FRAMING @600 OC
15.9 TYPE X SHEET ROCK PANELS W/ PAINT FINISH

W2

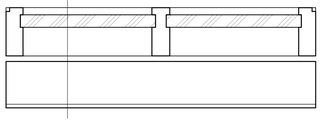


W2:
KAWNEER 1600 SYSTEM CURTAIN WALL C/W
SEMI-RIGID INSULATION BEHIND SPANDREL PANELS
25.4 AIR SPACE
152 LIGHTWEIGHT STEEL FRAMING @600 OC
15.9 TYPE X SHEET ROCK PANELS W/ PAINT FINISH

W3

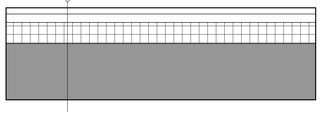


W3:
22 VICWEST 7/8" CORRUGATED METAL PANEL
30 OMEGA BARS @900 OC
75 KAWARTHA SPRAY FOAM INSULATION
AIR/VAPOUR BARRIER
200 CONCRETE SHEER WALLS

W4

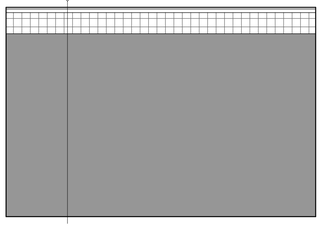

W4:
6 CEMENT PARGING ON NYLON MESH
12.7 CEMENT BOARD
100 XPS INSULATION
AIR/VAPOUR BARRIER
650 CONCRETE PERIMETER FOUNDATION WALL

W5

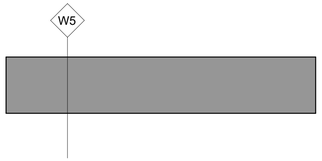


W5:
200 CONCRETE SHEER WALLS

W5a



W5a:
15.9 GYPSUM BOARD
41 LIGHTWEIGHT STEEL FRAMING
200 CONCRETE SHEER WALLS

W5b

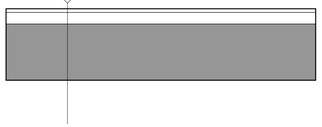


W5b:
12.7 GYPSUM BOARD
41 LIGHTWEIGHT STEEL FRAMING
200 CONCRETE SHEER WALLS

W5c




W5c:
15.9 GYPSUM BOARD
41 LIGHTWEIGHT STEEL FRAMING
200 CONCRETE SHEER WALLS
41 LIGHTWEIGHT STEEL FRAMING
12.7 GYPSUM BOARD

W6

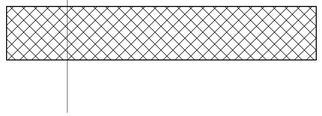


W6:
190 CONCRETE MASONRY UNITS

W6a

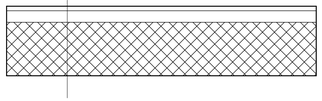


W6a:
15.9 GYPSUM BOARD
41 LIGHTWEIGHT STEEL FRAMING
190 CONCRETE MASONRY UNITS

W6b

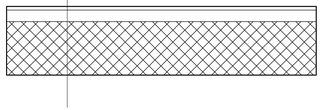


W6b:
12.7 GYPSUM BOARD
41 LIGHTWEIGHT STEEL FRAMING
190 CONCRETE MASONRY UNITS

Pa1

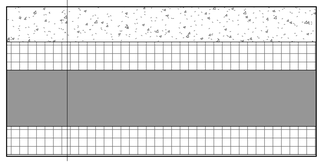

Pa1:
125 ARCHITECTURAL PRECAST PANEL
100 ROCKWOOL CAVITYROCK SEMI-RIGID INSULATION
200 CONCRETE SHEER WALL
AIR/VAPOUR BARRIER
100 ROCKWOOL CAVITYROCK SEMI-RIGID INSULATION
12.7 CEMENT BOARD

Pa2

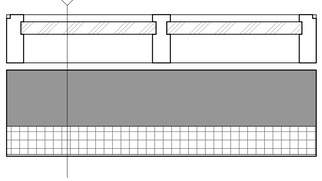


Pa2:
KAWNEER 1600 SYSTEM CURTAIN WALL C/W
SEMI-RIGID INSULATION BEHIND SPANDREL PANELS
25.4 AIR SPACE
200 CONCRETE SHEER WALL
AIR/VAPOUR BARRIER
100 ROCKWOOL CAVITYROCK SEMI-RIGID INSULATION
12.7 CEMENT BOARD

P1




P1:
41 COLD FORMED STEEL FRAMING
15.9 TYPE X GYPSUM BOARD

P2

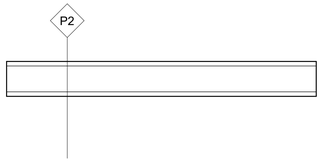


P2: (ULC W453)
15.9 TYPE X GYPSUM BOARD
92 COLD FORMED STEEL FRAMING
15.9 TYPE X GYPSUM BOARD

P3

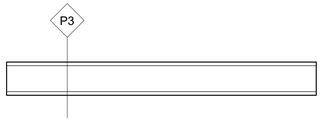


P3:
12.7 GYPSUM BOARD
92 COLD FORMED STEEL FRAMING
12.7 GYPSUM BOARD

PI1

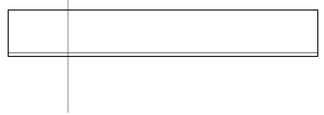


PI1:
152 COLD FORMED STEEL FRAMING
12.7 GYPSUM BOARD

PI2

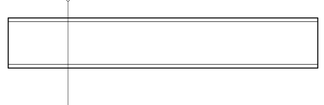

PI2:
12.7 GYPSUM BOARD
152 COLD FORMED STEEL FRAMING
12.7 GYPSUM BOARD

PI3

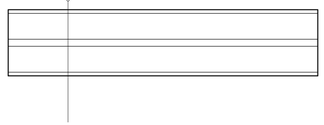

PI1:
12.7 GYPSUM BOARD
92 COLD FORMED STEEL FRAMING
25.4 AIR GAP
92 COLD FORMED STEEL FRAMING
12.7 GYPSUM BOARD



DO NOT SCALE DRAWINGS

CONTRACTOR(S) TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO COMMENCING ANY WORK.

ALL ERRORS AND OMISSIONS AND ALL DISCREPANCIES ON THE DRAWINGS , SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS, MUST BE FORWARDED IN WRITING TO THE DESIGNER WITHIN TWO (2) DAYS, UPON DISCOVERY.

THE DESIGNER DOES NOT ASSUME ANY RESPONSIBILITY AND LIABILITY IF THESE INSTRUCTIONS ARE NOT MET.

DO NOT COPY. THESE DRAWINGS AND ALL THE MATERIAL CONTENT ARE COPYRIGHT AND THE INTELLECTUAL PROPERTY OF ALGONQUIN COLLEGE. ©

No.	Revision	Date

PROJECT TITLE:
Enbridge Gas - Southern
Ontario Regional
Administration Building

DRAWING TITLE:
Wall, Floor & Roof
Assemblies

SCALE: 1 : 10

DATE: 04/11/25

PROJECT NUMBER: WDIV-W25-02-2.1

DRAWN BY: Steven Estafanos

SHEET No.:

A801

4/11/2025 5:55:56 PM